


Notes: (Unless Otherwise Specified)


1. Waterproof Rate: IP67.
2. Recommend Panel Thickness: 0.8 to 6.0 mm.
3. Recommend Torque: 14~15 Kgf-cm.

REV	ECN#	DESCRIPTION OF REVISION	DRAW BY DATE	CHECK BY DATE	APPROVE BY DATE
A0		Mass Production	Lucas 04/28/14	Ray 04/28/14	Ray 04/28/14

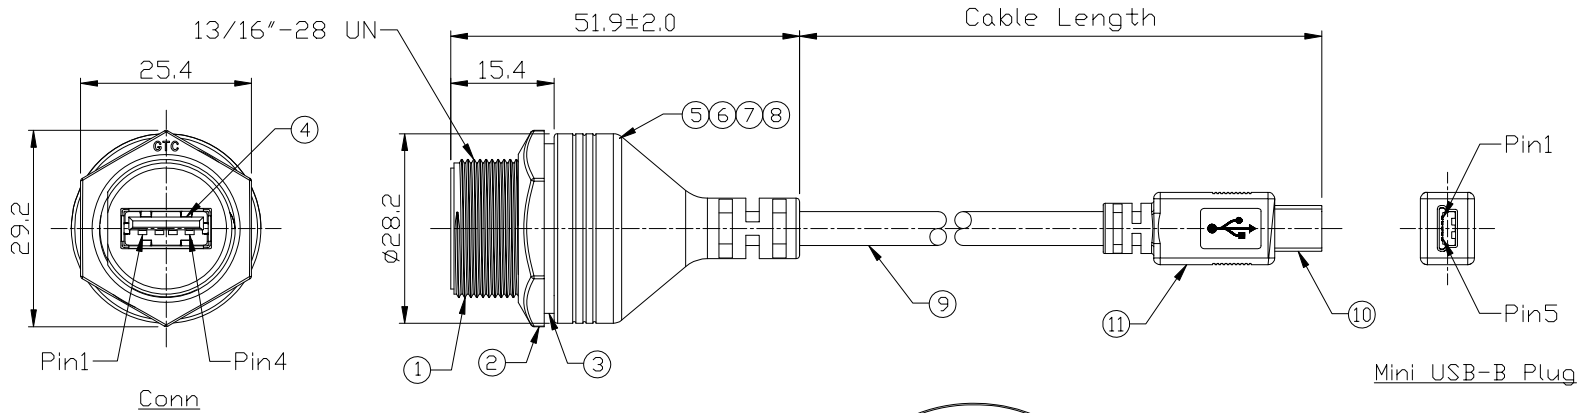


DOC.CENTER.ISSUE  
APR.29.2014  
ONLY FOR  
RELEASE

11	Over Mold	PVC Color: Black	1
10	Mini USB-B Plug	Housing: Thermoplastic, Color: Black Contacts: Copper Alloy, Finish: Au Plated Shell: Cold Roll Steel, Finish: Ni Plated	1
9	Cable	UL2725 1P*28AWG+2C*24AWG+Al/My+D+B Color: Black, OD=5.0mm	1
8	Over Mold	PVC Color: Black	1
7	Inner Mold	Thermoplastic Color: White Or Black	1
6	Glue	Epoxy Color: Black	
5	PCB	FR-4 Color: _____	1
4	USB-A Receptacle	Housing: Thermoplastic, Color: Black Contacts: Copper Alloy, Finish: Au Plated Shell: Copper Alloy, Finish: Ni Plated	1
3	Gasket	Silicone Color: Black	1
2	Hex Nut	Thermoplastic Color: Black	1
1	Housing	Thermoplastic Color: Black	1
Item	Part Name	Material / Finish	Qty



Recommend  
Panel Cut-Out

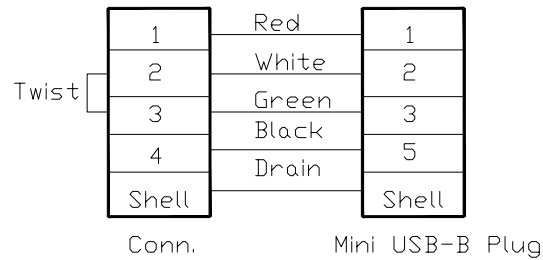

Wiring Diagram

www.USBFireWire.com

TITLE						DRAWING NUMBER			REV.
USB-A Plastic C3 Cable To Cable Jack Screw With Cable + Mini USB-B Plug						RR-116310-07-XX			A0
DO NOT SCALE DRAWINGS		B	1:1	Lucas 04/28/14	Ray 04/28/14	Ray 04/28/14	X.X ± 0.5 X.XX ± 0.2	X.XXX ± 0.05 ANGLES ± 1°	mm 1/1
THIRD ANGLE PROJECTION		SIZE	SCALE	DRAW / DATE	CHECK / DATE	APPROVE / DATE	TOLERANCES		UNIT SHEET

NOTICE OF PROPRIETARY PROPERTY:  
THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF GT CONTACT CO., LTD. THE POSSESSOR AGREES TO THE FOLLOWING:  
(1) TO MAINTAIN THIS DOCUMENT IN CONFIDENCE  
(2) NOT TO REPRODUCE OR COPY IT  
(3) NOT TO REVEAL OR PUBLISH IT IN WHOLE OR PART  
(4) ALL RIGHTS RESERVED