


CHANGE VERSION	変更内容	C	
A	12/05/23	REL	D
B			E

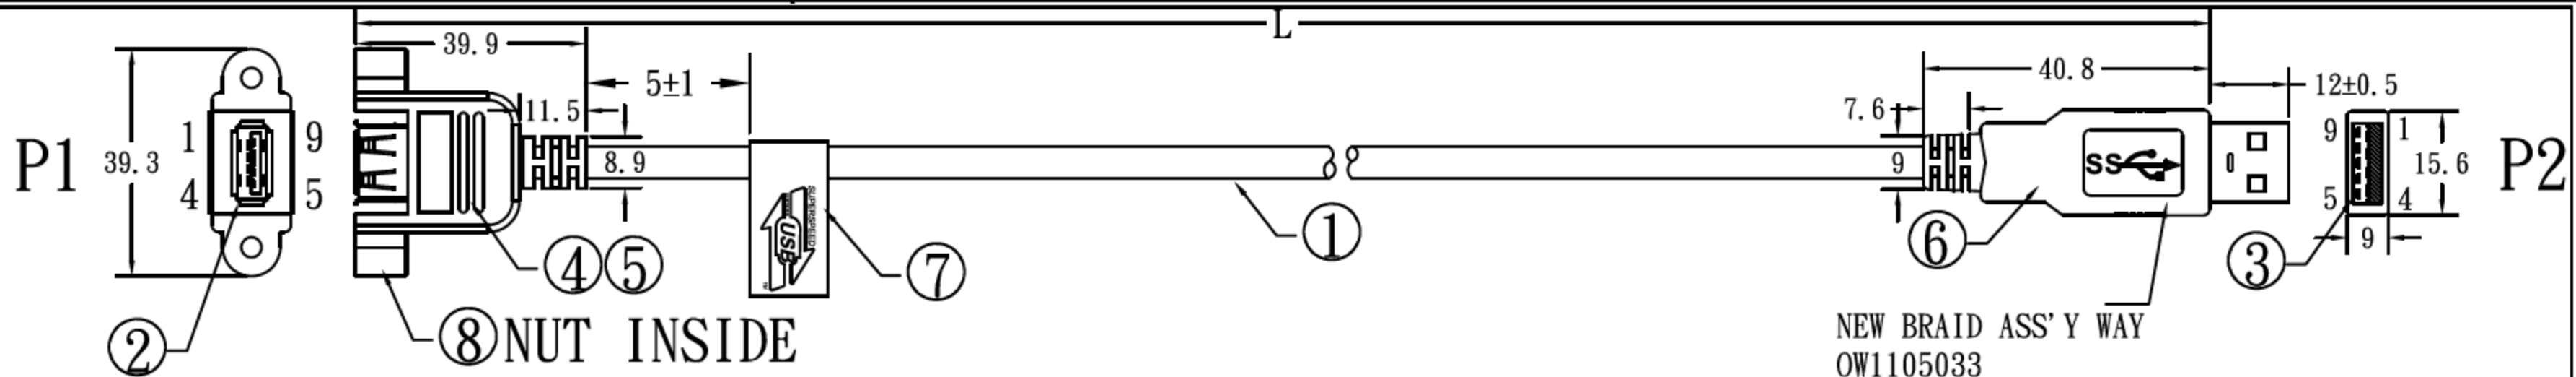


PIN OUT:

P1	P2	
1	1	RD
2	2	WH
3	3	GN
4	4	BK
5	5	BL
6	6	YL
7	7	SDP DRAIN
8	8	PR
9	9	OR
S	S	DRAIN

45mm	
RR-ASAFPM-10GR	15mm
RR-ASAFPM-20GR	15mm
RR-ASAFPM-40GR	15mm

P/N STICKER

P/N	LENGTH	CABLE L	PE BAG	PACKAGE
RR-ASAFPM-10GR	255 <sup>+20</sup> <sub>-0</sub>	260mm	06*3"*8"	(1)
RR-ASAFPM-20GR	508 <sup>+30</sup> <sub>-0</sub>	515mm	06*3"*8"	(2)
RR-ASAFPM-40GR	1016 <sup>+40</sup> <sub>-0</sub>	1030mm	06*3"*8"	(2)

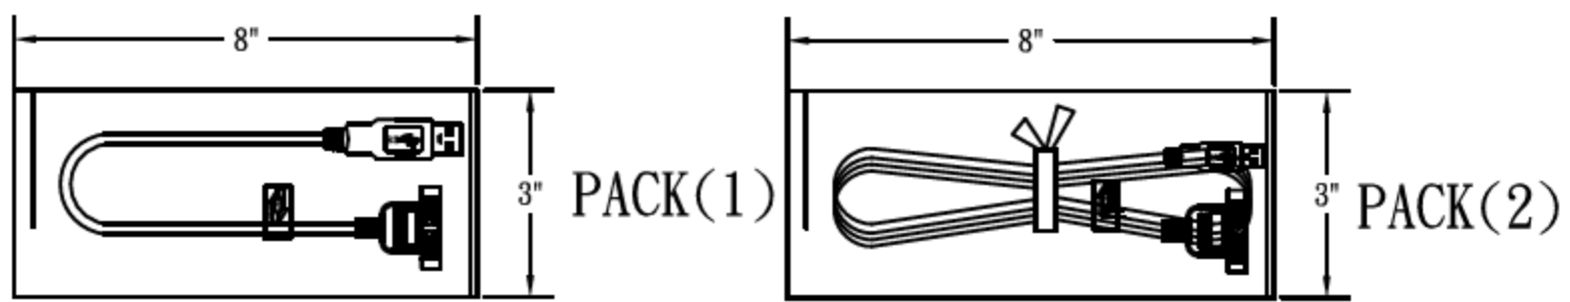

MATERIAL LIST :

NO.	P/NAME	DESCRIPTION	Q' TY
1	WIRE	UL20276 [28AWG(7/0.12 TC)*1P+1+AL+MYLAR]*2C+28AWG(7/0.12 TC)*1P+24AWG(7/0.20 TC)*2C+AL+1(BC)+80B(AM) OD:5.5±0.15 BLACK(B792) USB3.0 VERSION	1
2	PLUG	USB3.0 "A" TYPE FEMALE PIN=30u" GOLD PLATED	1
3	PLUG	USB3.0 "A" TYPE MALE PIN=30u" GOLD PLATED	1
4	PVC	LD PE	2g
5	PVC	35P BLACK(B792)PVC	15g
6	PVC	45P BLACK(B792)PVC	6g
7	STICKER	AS ABOVE(15*75mm)	1
8	NUT	#4-40 NUT	2
9	SCREW	#4-40 5.3*10mm+TYPE SCREW	2
10	PACKAGE	1PCE/PE BAG:06*A"*B", + P/N STICKER (2PCS 5.3*10mm+TYPE SCREW, IN 06*2.5*5CM PE BAG)	1

MOLD TOOL NO.  
USB AM  
A110-160-001  
USB 3.0 AF  
A110-645-001  
B120-149-001

<a href="http://www.USBFireWire.com">www.USBFireWire.com</a>			
	SCALE	UNIT	REV
		MM	A
FILE NAME	CUSTOMER		
	OW1205041		
DATE	CUSTOMER P/N		
	RR-ASAFPM-XXGR		

<b>RoHS</b>
DRAWN BY
MARCOS
CHECKED BY
CONFIRMED BY
CHECKED BY
APPROVED BY