NOTES: (UNLESS OTHERWISE SPECIFIED)

CABLE LENGTH TOLERANCE:

0 to 1M:± 40 mm

1 to 10M:± 5% mm

OVER 10 M:± 500 mm

REV	ECN#	DESCRIPTION OF REVISION	
01		PRELIMINARY	122208

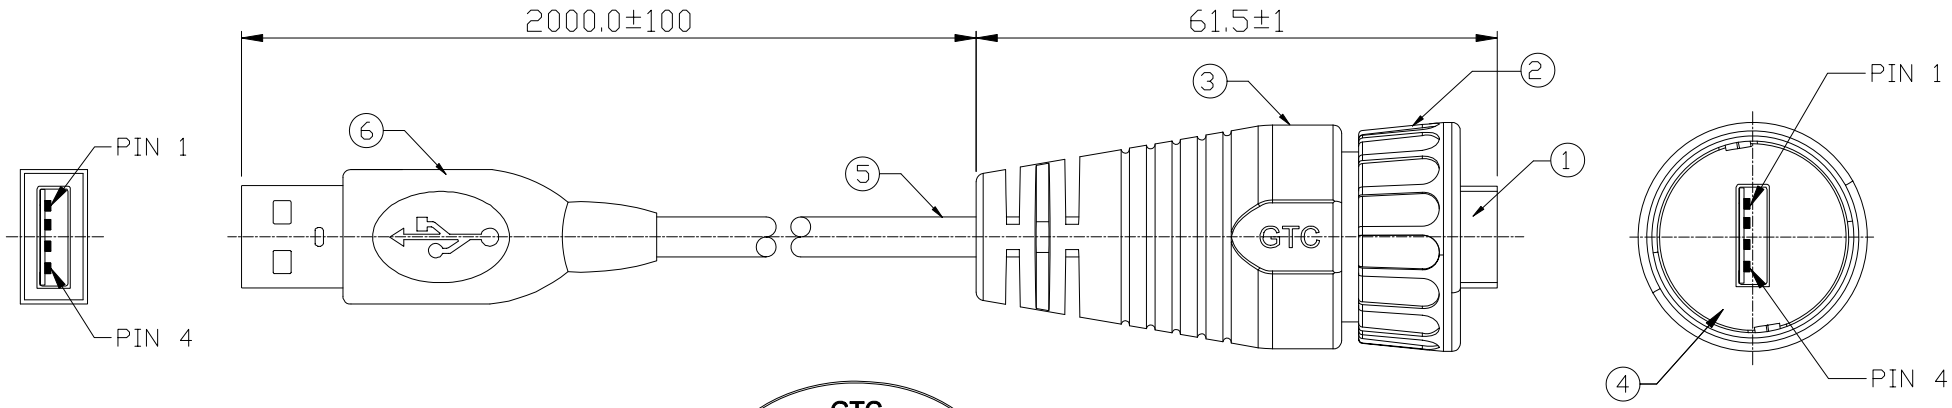

GTC
R&D DEPT. ISSUE
DEC.26.2008
ONLY FOR RELEASE

ITEM	MATERIAL
1	HOUSING: THERMAL PLASTIC UL94 V-0 COLOR: BLACK CONTACTS: COPPER ALLOY FINISH: GOLD
2	THERMAL PLASTIC UL94 V-0 COLOR: BLACK
3	PVC COLOR: BLACK
4	EPDM COLOR: BLACK
5	PVC COLOR: BLACK
6	HOUSING: THERMAL PLASTIC UL94 V-0 COLOR: BLACK CONTACTS: COPPER ALLOY FINISH: GOLD



WIRING DIAGRAM

METRIC

DRAFTER: KAREN — DATE: 12/26/08

APPROVED: RAY — DATE: 12/26/08

DIMENSIONS ARE IN MILLIMETER

TOLERANCES

X.X ±0.5

X.XX ±0.20

X.XXX ±0.05

ANGLES ±0.5°

DO NOT SCALE DRAWINGS

THIRD ANGLE PROJECTION

SIZE: B

www.USBFireWire.com

NOTICE OF PROPRIETARY PROPERTY:

THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF GT Contact CO,LTD THE POSSESSOR AGREES TO THE FOLLOWING:

(i) TO MAINTAIN THIS DOCUMENT IN CONFIDENCE

(ii) NOT TO REPRODUCE OR COPY IT

(iii) NOT TO REVEAL OR PUBLISH IT IN WHOLE OR PART

(iv) ALL RIGHTS RESERVED

TITLE

USB-A TYPE,CABLE END CONNECTOR,
STRAIGTH, LOCK NUT,
WITH 2 M CABLE+USB-A PLUG,OVER MOLDED

DRAWING NUMBER: RR-111220-05-XX

REV.: 01

SCALE: 1:1

SHT 1 OF 1