

1

2

3

4

REV	ECN#	DESCRIPTION OF REVISION	DRAW BY DATE	CHECK BY DATE	APPROVE BY DATE
01			Lucas 07/23/14	Roy 07/23/14	Roy 07/23/14
02	ECN-140821	Modify Cable Standard	Joyce 08/15/14	Lucas 08/15/14	Roy 08/15/14


- Notes: (unless Otherwise Specified)
1. Waterproof Rate: IP67.
 2. Recommend Panel Thickness : 0.8 to 3.0 mm.
 3. Recommend Torque: 9-10 KgF-cm.
 4. Mating Cap P/N: GT1C1210X2.
 5. ROHS Compliant.
 6. 產品採用無Logo PE袋單PCB包裝,並將標籤貼於袋外.

RR-11A200-0P-2L_REV0XX_OTY:1P0S
LOT: XXXX
Made in China



7. 每25PCS產品再用防水袋包裝,並將標籤貼於袋外.

RR-11A200-0P-2L_REV0XX_OTY:2P0S
LOT: XXXX
Made in China

8. 標籤上的REV: 請依照成品圖面版本.
9. 不可使用夾鍊袋




Conn.

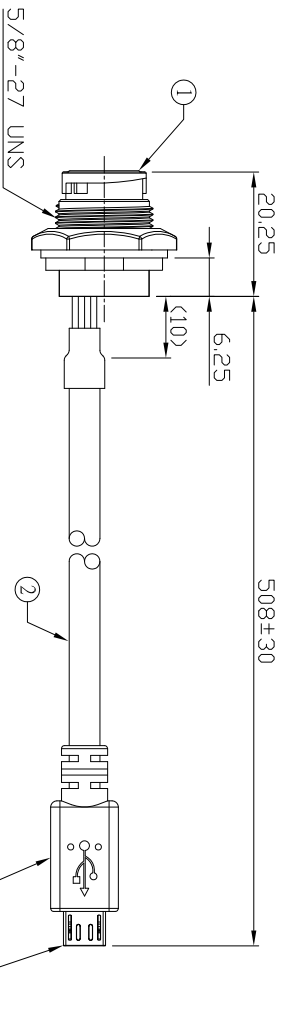


Micro USB-B Plug

GTC
 R&D DEPT. ISSUE
 AUG.15.2014
 ONLY FOR
 RELEASE

Item	Part Name	Material / Finish	Qty
4	Over Mold	Color: Black	1
3	Micro USB-B Plug	Housing: Thermoplastic, Color: Black Contacts: Copper Alloy, Finish: Au Plated Shell: Copper Alloy, Finish: Ni Plated	1
2	Cable	UL2725 1P*28AWG+3C*24AWG+1My+D+B DD=5.0mm, Color: Black	1
1	Mirco USB-AB Plastic C2 Panel	GT Contact P/N: G11A200-0P-XX	1



Recommend
 Panel Cut-Out

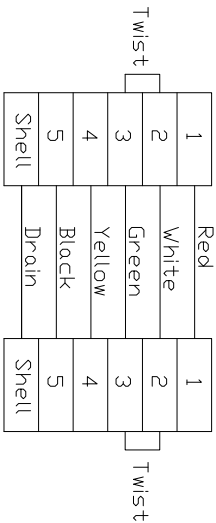

Wiring Diagram

Conn.1 Micro USB-B Plug

Mirco USB-AB Plastic C2 Panel Jack Lock With Micro USB-B Plug

DRAWING NUMBER
 RR-11A200-0P-20

REV.
 02

THIRD ANGLE PROJECTION	SIZE	SCALE	DRAW / DATE	CHECK / DATE	APPROVE / DATE	TOLERANCES	UNIT	SHEET
	B	1:1	Lucas 07/23/14	Roy 07/23/14	Roy 07/23/14	XX ± 0.5 XXX ± 0.2	mm	1/1

www.USBFireWire.com
 NOTICE OF PROPRIETARY PROPERTY:
 THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF GT CONTACT COL.LTD THE POSSESSOR AGREES TO MAINTAIN THIS DOCUMENT IN CONFIDENCE AND NOT TO REPRODUCE OR PUBLISH IT IN WHOLE OR PART (C) ALL RIGHTS RESERVED

A

B

C

D

A

B

C

D

1

2

3

4