


ROHS Compliant

PIN ASSIGNMENT

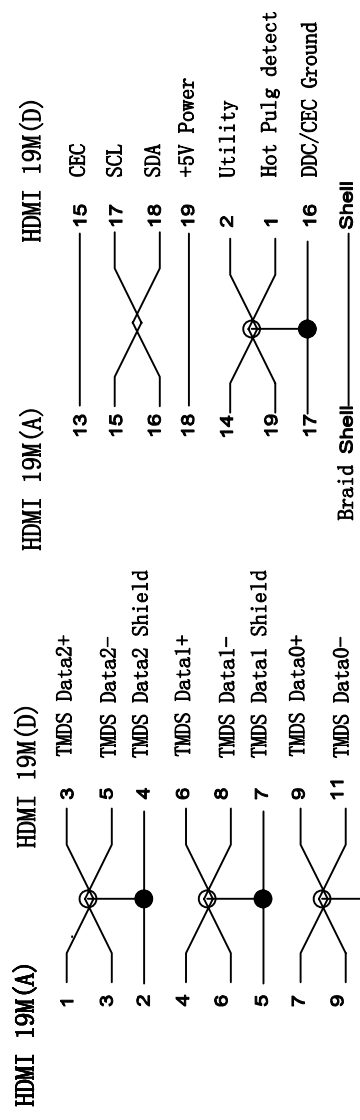

www.USBFirewire.com

5	Nut				
4	65P Black PVC				
3	HDMI AF, BLACK INSULATION, SHELL 3U" GOLD PLATED WITH SOLDER (P/N YQT-HAF3)	Tolerance Unless Otherwise Specified			HDMI DM TO AF
2	HDMI DM, BLACK INSULATION, SHELL 3U" GOLD PLATED WITH SOLDER (P/N YQT-HDM3)	UP TO 5 ±0.2			PART NO.
1	(1P*30AWG+D+AL*5C+4C*30AWG+AL+D+B OD5.5 L=5in/12in/24in/6ft Black	ABOVE 5 --30 ±0.3			RR-7S-3FPM-XXG
		ABOVE 30--50 ±0.4			DRAW NO.
		ABOVE 50 ±0.5			SCALE
NO	Description	ANGLE	DATE	1:1	UNIT
		±3°			mm