

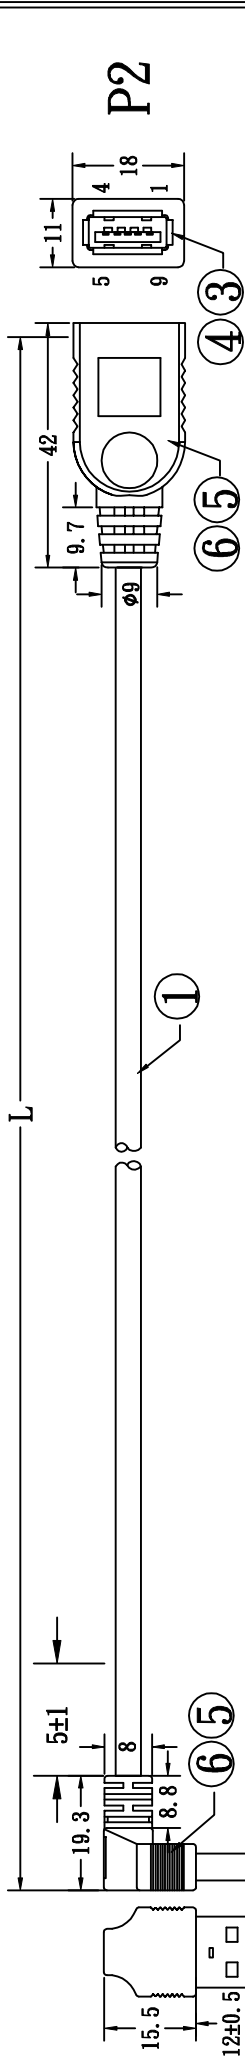


CHANGE VERSION	REMARKS	C	11/06/05	CFM AF TOOLING SIZE
A	11/04/30 REL	D	13/05/24	REMOVE STICKER, CHANGE PIN 30u"
B	11/05/25 CFM TOLERANCE, CHANGE AF ENCLOSED TYPE	E		

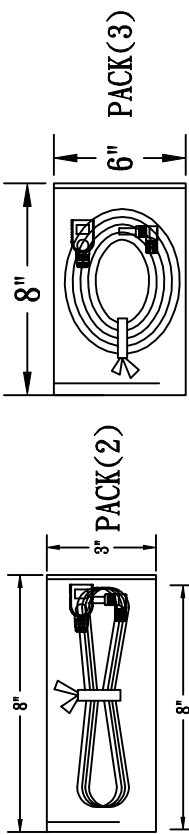

P/N	LENGTH	PE BAG PACKAGE
RR-ADAF-06GR	153 <sup>+20</sup> <sub>-0</sub>	06*3" *8" (1)
RR-ADAF-10GR	255 <sup>+20</sup> <sub>-0</sub>	06*3" *8" (1)
RR-ADAF-20GR	508 <sup>+30</sup> <sub>-0</sub>	06*3" *8" (2)
RR-ADAF-40GR	1016 <sup>+40</sup> <sub>-0</sub>	06*3" *8" (2)
RR-ADAF-78GR	1980 <sup>+60</sup> <sub>-0</sub>	06*6" *8" (3)

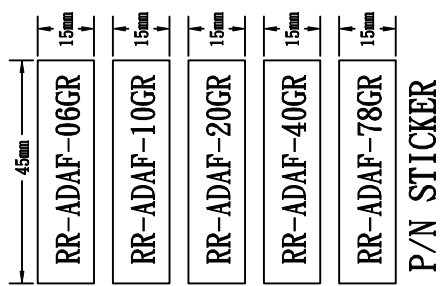

- PIN OUT: P1**
- 1 RD
  - 2 WH
  - 3 GN
  - 4 BK
  - 5 BL
  - 6 YL
  - 7 SDP DRAIN
  - 8 PR
  - 9 OR
  - S S DRAIN
- PIN OUT: P2**
- 1 RD
  - 2 WH
  - 3 GN
  - 4 BK
  - 5 BL
  - 6 YL
  - 7 SDP DRAIN
  - 8 PR
  - 9 OR
  - S S DRAIN

**MATERIAL LIST :**

NO.	P/NAME	DESCRIPTION
1	WIRE	UL20276 [28AWG(7/0.12 TC)*1P+1+AL+MYLAR]*2C+28AWG(7/0.12 TC)*1P+24AWG(7/0.20 TC)*2C+AL+1(BC)+80B(AM) OD: 5.5±0.15 BLACK(B792) USB3.0 VERSION
2	PLUG	USB3.0 "A" TYPE MALE GOLD PLATED PIN=30u" SHORT TYPE
3	PLUG	USB3.0 "A" TYPE FEMALE GOLD PLATED PIN=30u"
4	TINPLATE	USB TINPLATE
5	PVC	LD PE
6	PVC	45P BLACK(B792)/PVC
7	PACKAGE	1PCE/PE BAG: 06*A" *B", + P/N STICKER

MOLD TOOL NO1	WWW.USBFireWire.com	DRAWN BY	Marcos
USB3.0 AM(DOWN) A110-625-001 B120-297-001 "A" TYPE 3.0 F A110-688-001 B120-334-001	SCALE UNIT REV MM D	CHECKED BY	
FILE NAME OW1104058	CUSTOMER	CONFIRMED BY	
DATE 13/05/24	CUSTOMER P/N RR-ADAF-XXGR	CHECKED BY	
		APPROVED BY	

**ROHS**