



CHANGE VERSION	REMARKS	C	11/06/05	CFM AF TOOLING SIZE
A	REL	D	11/06/05	CHANGE PIN TO 30u", REMOVE STICKER
B	CFM TOLERANCE, CHANGE AF ENCLOSED TYPE	E		

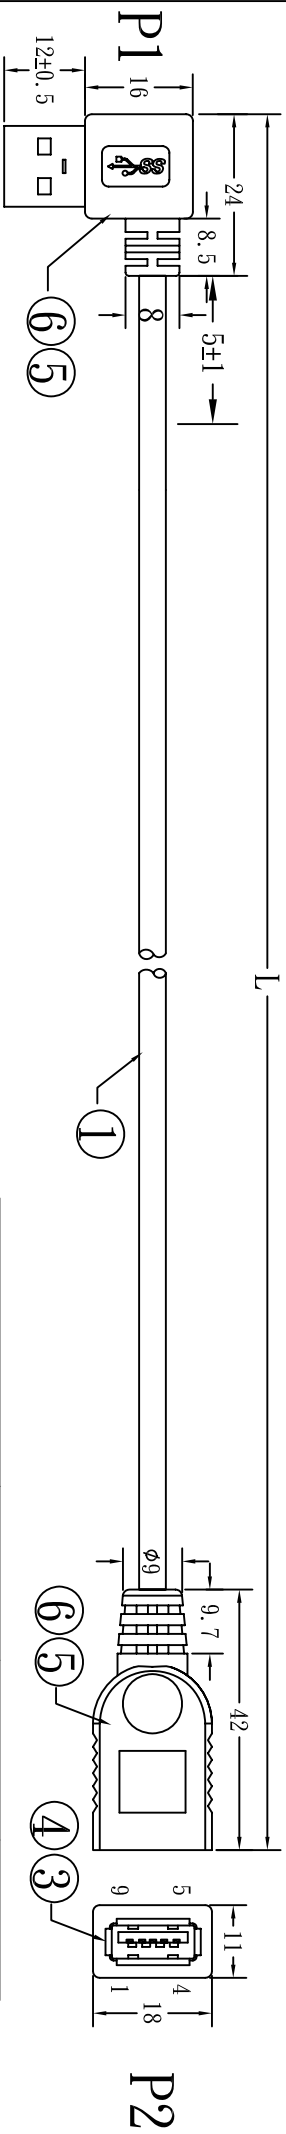


PIN OUT:

- | | | | |
|----|-------------|----|-------------|
| P1 | 1 RD | P2 | 1 RD |
| | 2 WH | | 2 WH |
| | 3 GN | | 3 GN |
| | 4 BK | | 4 BK |
| | 5 BL | | 5 BL |
| | 6 YL | | 6 YL |
| | 7 SDP DRAIN | | 7 SDP DRAIN |
| | 8 PR | | 8 PR |
| | 9 OR | | 9 OR |
| | S DRAIN | | S DRAIN |

RR-ALAF-06GR	15mm
RR-ALAF-10GR	15mm
RR-ALAF-20GR	15mm
RR-ALAF-40GR	15mm
RR-ALAF-78GR	15mm

P/N	LENGTH	PE BAG	PACKAGE
RR-ALAF-06GR	153 ⁺²⁰	06*3"*8"	(1)
RR-ALAF-10GR	255 ⁺²⁰	06*3"*8"	(1)
RR-ALAF-20GR	508 ⁺³⁰	06*3"*8"	(2)
RR-ALAF-40GR	1016 ⁺⁴⁰	06*3"*8"	(2)
RR-ALAF-78GR	1980 ⁺⁶⁰	06*6"*8"	(3)

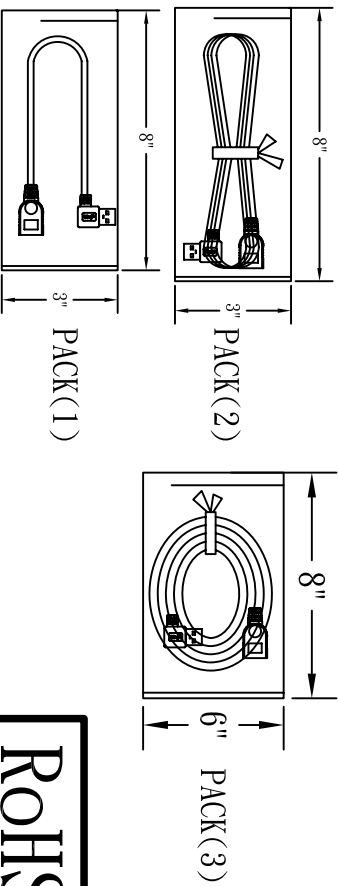

ROHS

MATERIAL LIST :

NO.	P/NAME	DESCRIPTION	Q' TY
1	WIRE	UL20276 [28AWG(7/0.12 TC)*1P+1+AL+MYLAR]*2C+28AWG(7/0.12 TC)*1P+24AWG(7/0.20 TC)*2C+AL+1(BC)+80B(AM) OD:5.5±0.15 BLACK(B792) USB3.0 VERSION	1
2	PLUG	USB3.0 "A" TYPE MALE PIN=30u" GOLD PLATED SHORT TYPE	1
3	PLUG	USB3.0 "A" TYPE FEMALE PIN=30u" GOLD PLATED SHORT TYPE	1
4	TINPLATE	USB TINPLATE	1
5	PVC	LD PE	4g
6	PVC	45P BLACK(B792)PVC	14g
7	PACKAGE	IPCE/PE BAG:06*A*B", + P/N STICKER	1

MOLD TOOL NO.
USB3.0 AM(LEFT) A110-624-001 B120-296-001
"A" TYPE 3.0 F NEW TOOLING

www.USBFireWire.com			
FILE NAME	CUSTOMER	SCALE	UNIT
OW1104056			MM
DATE	CUSTOMER P/N		REV
13/01/12			D

DRAWN BY	MARCOS
CHECKED BY	
CONFIRMED BY	
CHECKED BY	
APPROVED BY	