


P1,P2: M-Y4050A
M-4050A

Customer No: N0.1

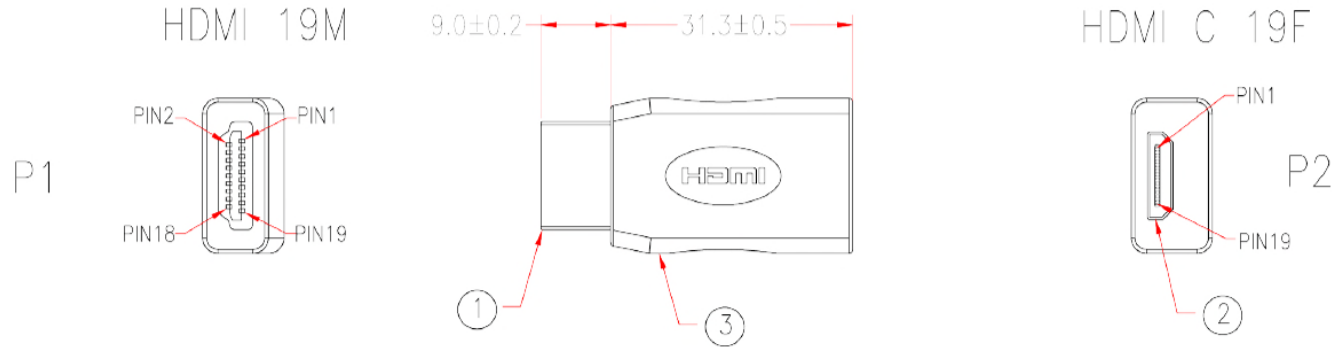

4565		
P1		P2
1	_____	2
3	_____	3
2	_____	1
4	_____	5
6	_____	6
5	_____	4
7	_____	8
9	_____	9
8	_____	7
10	_____	11
12	_____	12
11	_____	10
13	_____	14
17	_____	13
18	_____	18
15	_____	15
16	_____	16
14	_____	17
19	_____	19
SHIELD	_____	SHIELD

NOTE: All relevant materials are complied with RoHS directive .

No.	DESCRIPTION	Q'TY	Supplier		
3	UL1061 28AWG INSULATOR WIRE, LENGTH 20mm, ID0.9, DRAWING No.EH002801C-024	1	M304		
	MOLDED PE COLOR TRANSPARENT		M280		
	MOLDED PVC BLACK		M304		
	COPPER FOIL 20*40mm	1	M309		
	PCB: MSL-72	1	M730		
2	HDMI C 19 FEMALE, GOLD PLATING 15u" ON CONTACTS & GOLD CONNECTOR, BLACK INSULATOR(R-S160U-0),PCB TYPE	1	M24		
1	HDMI 19 MALE, GOLD PLATING 15u' ON CONTACTS & GOLD CONNECTOR, BLACK INSULATOR, PCB TYPE	1	M83		
APPROVED		www.USBFireWire.com			
CHECKED	HU				
DRAWING	JIANG				
DATE	10/AUG/11	ITEM NO.	RR-HDMI-CFAM	UNIT:mm	

Cable Length Unless Other Spec.
Tolerances:
0 ~200mm ±10mm
201~1000mm ±20mm
1001 ~1500mm ±25mm
1501~2100mm ±30mm
2100mm↑ ±40mm

CHECKED