

1

2


3

4


Notes: (Unless Otherwise Specified)

- 1. Waterproof Rate: IP67.
- 2. Suitable Cable \varnothing =4.0mm To 6.0 mm.
- 3. Recommend Cover Torque: 6~7 Kgf-cm.
- 4. Recommend Gland Nut Torque: 9~10 Kgf-cm.
- 5. RoHS Compliant.


REV	ECN#	DESCRIPTION OF REVISION	DRAW BY DATE	CHECK BY DATE	APPROVE BY DATE
01			Joyce 08/19/15	Lucas 08/19/15	Ray 08/19/15

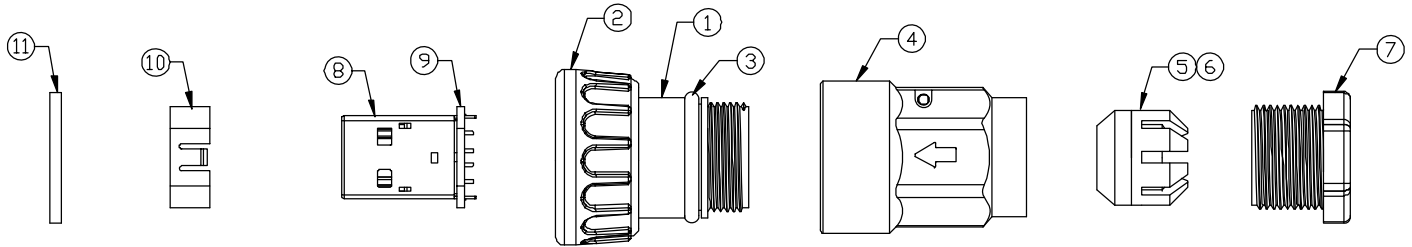

11	Rubber Pad	Silicone Color: Black	1
10	Holder	Thermoplastic Color: Black	1
9	PCB	FR-4 Color: -	1
8	USB-A Plug	Housing: Thermoplastic, Color: Black Contacts: Copper Alloy, Finish: Au Plated Shell: Copper Alloy, Finish: Ni Plated	1
7	Gland Nut	Thermoplastic Color: Black	1
6	Cage	Thermoplastic Color: White	1
5	Gland	Silicone Color: Green	1
4	Cover	Thermoplastic Color: Black	1
3	O-Ring	Silicone Color: Red	1
2	Screw Nut	Thermoplastic Color: Black	1
1	Housing	Thermoplastic Color: Black	1
Item	Part Name	Material / Finish	Qty



R&D DEPT. ISSUE
AUG.26.2015
ONLY FOR RELEASE

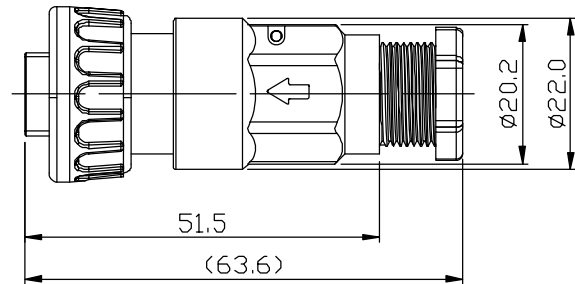

TITLE						DRAWING NUMBER			REV.	
USB-A Plastic C3 Field Installable Cable End Screw						RR-116370-00			01	
THIRD ANGLE PROJECTION		SIZE	SCALE	DRAW / DATE	CHECK / DATE	APPROVE / DATE	TOLERANCES	UNIT	SHEET	
		B	1:1	Joyce 08/19/15	Lucas 08/19/15	Ray 08/19/15	XX ± 0.5 X.XX ± 0.2	XXXX ± 0.05 ANGLES ± 1°	mm	1/1

THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY INFORMATION OF RR BUSINESS VENTURES, LLC. THE POSSESSOR AGREES TO THE FOLLOWING:
 1. MAINTAIN THIS DOCUMENT IN CONFIDENCE
 2. NOT TO REPRODUCE OR COPY IT
 3. NOT TO REVEAL OR PUBLISH IT IN WHOLE OR IN PART

COPYRIGHT © 2019

1

2

3

4