



Notes: (Unless Otherwise Specified)

- 1. Waterproof Rate: IP67.
- 2. Recommend Panel Thickness: 0.8 to 5.0 mm.
- 3. Recommend Torque: 14~15 Kgf-cm.

REV	ECN#	DESCRIPTION OF REVISION	DRAW BY DATE	CHECK BY DATE	APPROVE BY DATE
01			Karen 12/10/15	Lucas 12/10/15	Ray 12/10/15

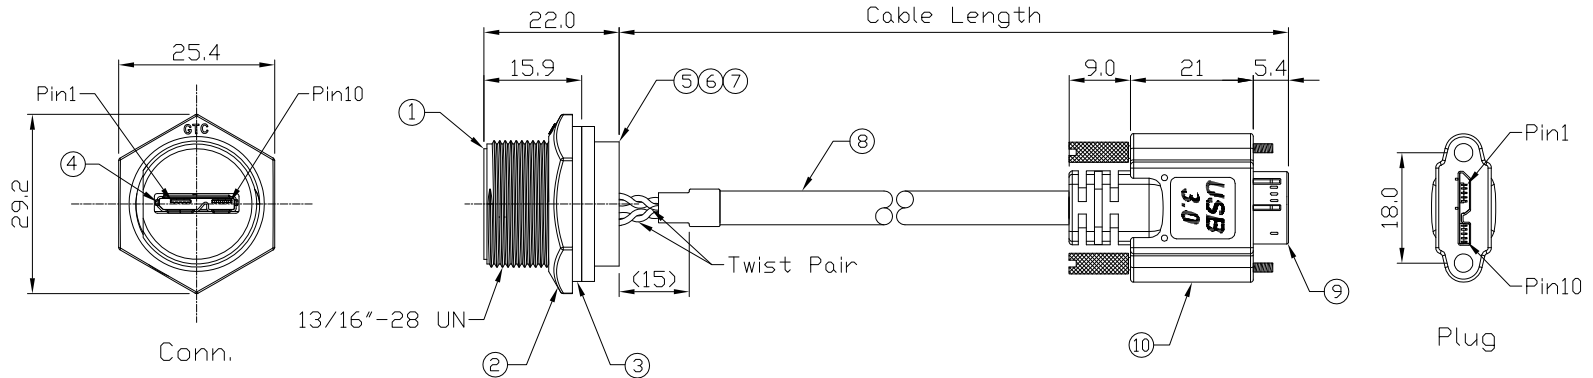

10	Over Mold	PVC Color: Black	1
9	Micro USB-B 3.0 Plug	Housing: Thermoplastic, Color: Black Contacts: Copper Alloy, Finish: Au Plated Shell: SPCC, Finish: Au Plated	1
8	Cable	UL2725 (1P*28AWGEM)*2+(1PR*28AWG+A)+2C*24AWG+AB 85% Color: Black OD=5.5mm	1
7	Hold	Silicone Color: Black	1
6	Glue	Epoxy Color: Black	1
5	PCB	FR-4 Color: —	1
4	Micro USB-B 3.0 Receptacle	Housing: Thermoplastic, Color: Black Contacts: Copper Alloy, Finish: Au Plated Shell: Copper Alloy, Finish: Ni Plated	1
3	Gasket	Silicone Color: Black	1
2	Hex Nut	Thermoplastic Color: Black	1
1	Housing	Thermoplastic Color: Black	1
Item	Part Name	Material / Finish	Qty



1	Red	1
2	White	2
3	Green	3
5	Black	5
6	Blue	6
7	Yellow	7
8	Drain	8
9	Purple	9
10	Orange	10
Shell	Braid	Shell

R&D DEPT. ISSUE  
DEC.10.2015  
ONLY FOR  
RELEASE

RR-119300-04-40	1016 mm	±50
RR-119300-04-20	508 mm	±40
Part No.	Cable Length	Tol.

Wiring Diagram

TITLE						DRAWING NUMBER			REV.	
Micro USB-B 3.0 Plastic C3 Panel Jack Screw With Cable + Micro USB-B 3.0 Plug						RR-119300-04-XX			01	
DD NOT SCALE DRAWINGS	B	1:1	Karen 12/10/15	Lucas 12/10/15	Ray 12/10/15	X.X ± 0.5 X.XX ± 0.2	X.XXX ± 0.05 ANGLES ± 1°	mm	1/1	
THIRD ANGLE PROJECTION	SIZE	SCALE	DRAW / DATE	CHECK / DATE	APPROVE / DATE	TOLERANCES		UNIT	SHEET	

www.USBFireWire.com

NOTICE OF PROPRIETARY PROPERTY:  
THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF USBFIREWIRE.COM THE POSSESSOR AGREES TO THE FOLLOWING:  
(1) TO MAINTAIN THIS DOCUMENT IN CONFIDENCE  
(2) NOT TO REPRODUCE OR COPY IT  
(3) NOT TO REVEAL OR PUBLISH IT IN WHOLE OR PART  
(4) ALL RIGHTS RESERVED