



DESCRIPTION CONTROL			
REV	DESC	DATE	ECN NO

PLASTIC TONGUE (BLACK SHADED AREA)

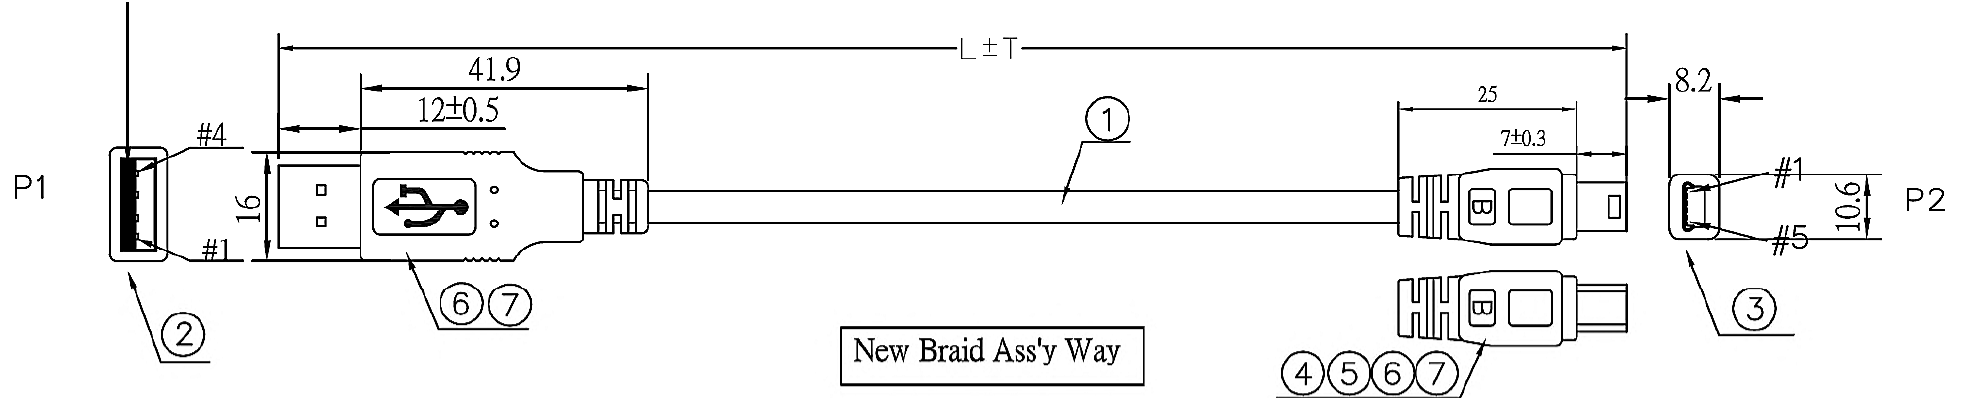

New Braid Ass'y Way

CUSTOMER P/N	L±T	M	TIE	PE BAG: L*W*0.06MM
RR-2MB-2400-06GX	152±15	0.14	80*1	PE BAG: 5"*6"*0.06MM
RR-2MB-2400-12GX	305±20	0.29	80*1	PE BAG: 5"*6"*0.06MM
RR-2MB-2400-18GX	457±20	0.445	80*1	PE BAG: 5"*6"*0.06MM
RR-2MB-2400-24GX	610±20	0.6	100*1	PE BAG: 5"*6"*0.06MM
RR-2MB-2400-36GX	915±30	0.9	120*1	PE BAG: 5"*6"*0.06MM

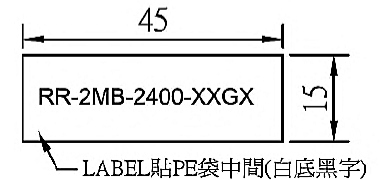


RoHS COMPLIANT

NOTE:
REF:UB2001021LX5618

*		LABEL:"RR-2MB-2400-XXGHF"45*15MM	1	PCS
*	310000000011	CARTON:46*30*20CM	A/R	PCS
*	300010000001	PE BAG:30"*28"*0.08MM	A/R	PCS
*		PE BAG:L*W*0.06MM	1	PCS
7	210010000328	FOIL-CU-8MM	26*2	MM
6	120010000031	PVC-BK10/50	12	G
5	200034000032	TUBE-HT-φ1.0MM (薄型)	5*3	MM
4	210030000057	HI TEAMP TAPE:W:6MM	20*1	MM
3	110081004087	MINI-USB-B-5P<BK> (超薄)<鐵殼鍍金>	1	SET
2	180-041033-C	USB-A-P(WH)L<鐵殼鍍金>	1	SET
1	1303041101293	UL2725,(1P+2C)+AB-BK10,OD:3.0(30/30) <REV:2.0>	L	M
NO	PART NO.	DESCRIPTION	QTY	UNIT

INNER MOLDING			
OUTER MOLDING	USB.A-01	USB.A388KF	

www.USBFireWire.com

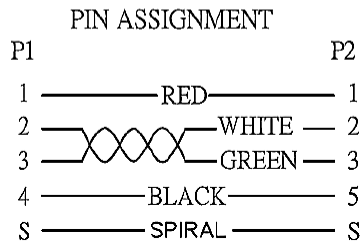

	ITEM: RR-2MB-2400-XXGX	REV R	
	DRAWN, BY: 劉石壽	SCALE: NONE	DATE: 2014.2.18
	CHECKED, BY:	CUSTOMER: C331<陸鴻>	PAGE: 1/2
APP'ED, BY:	CUSTOMER P/N: RR-2MB-2400-XXGX		
ALL DIMENSIONS IN mm			