



DESCRIPTION CONTROL			
REV	DESC	DATE	APP
B	Δ B	2010-08-17	N21008123
C	Δ C	2011-05-16	N21105109

PLASTIC TONGUE (BLACK SHADED AREA)

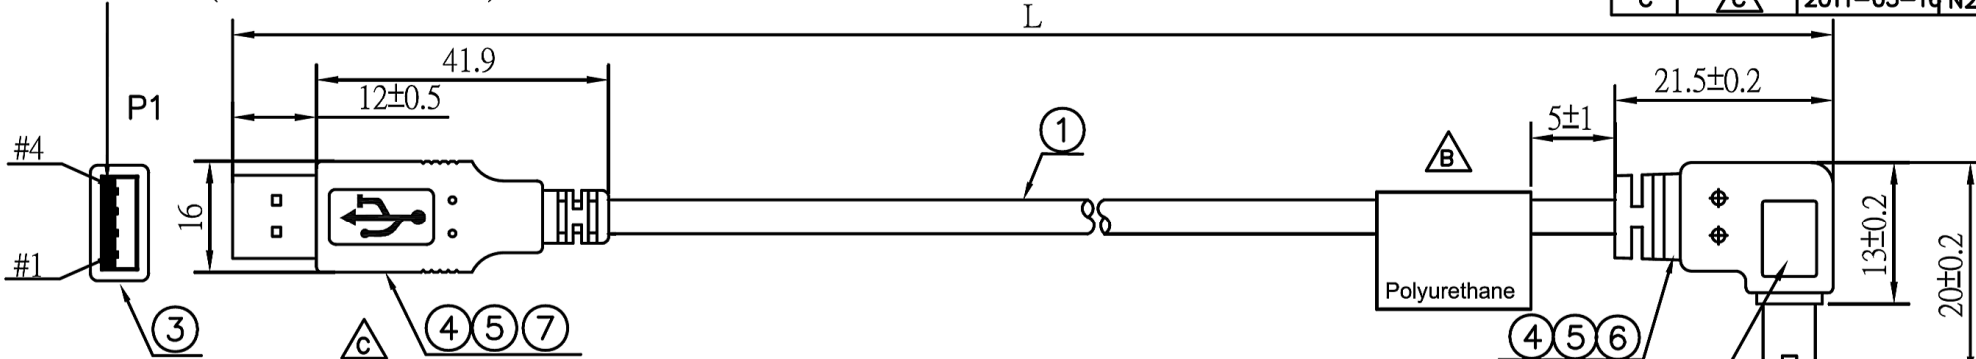


NEW BRAID ASS'Y WAY

CUSTOMER P/N	L±T	M	PE BAG: L*W*0.06MM	TIE-A/BK10
RR-2MBR01-15GLP	381±20	0.391	PE BAG: 5*6*0.06MM	80*1
RR-2MBR01-30GLP	762±30	0.772	PE BAG: 5*6*0.06MM	100*1
RR-2MBR01-60GLP	1524±30	1.534	PE BAG: 5*6*0.06MM	100*1
RR-2MBR01-180GLP	4572±30	4.582	PE BAG: 7*10*0.06MM	PE FLIM

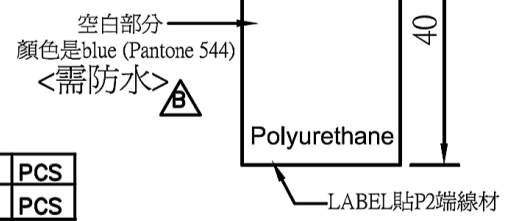


RoHS COMPLIANT

NOTE: REF UB0102100XX4316

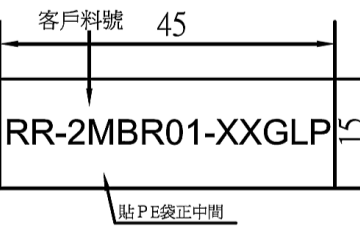

*	330010016543	LABEL: 40*25MM*Polyurethane* <藍底黑字> (需防水)	Δ B	1	PCS
*	330010010325	LABEL: 40*25MM*USB* (PVC材質)<貼線材>		1	PCS
*		LABEL: 45*15MM<白底黑字>		1	PCS
*	31000000012	CARTON: 46*30*25CM	A/R		PCS
*	30001000000	PE BAG: 30*28*0.08MM	A/R		PCS
*	390	PE BAG: L*W*0.06MM		1	PCS
*	220030000363	TIE-A/BK10		***	MM
7	21001000328	FOIL-CU-8MM Δ C		26*1	MM
6	21003000005	HI TEAMP TAPE: W: 6MM;		20*2	MM
5		TPE-BK10/50 <低煙無鹵 >		13.0	G
4	23002000000	SOL-WIRE-FULL-TIN-1.0		0.2	G
3	180-041033	USB-A-P<WH>/L<鐵殼鍍金>		1	SET
2	110081004126	MINI-USB-B-P-5PIN(BK) <鐵殼鍍金>		1	SET
1	1303041101771	UL2725,(1P+2C)+AB,BK10, OD: 4.8(28/24)<REV: 2.0> <低煙無鹵 >		L	M
NO	PART NO.	DESCRIPTION		QTY	UNIT

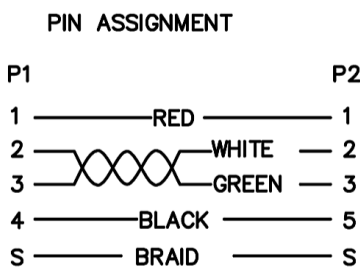

INNER MOLDING	A359KF		
OUTER MOLDING	USB.A-01	A360KF	
www.USBFireWire.com			
DRAW, BY: Fu Dan Xia		ITEM: UB0102100X04899	REV C
CHECK, BY:		SCALE: NONE	DATE: 2010/06/22
APP, BY:		CUSTOMER: C331<陸鴻>	
		CUSTOMER P/N: RR-2MBR01-XXGLP	
ALL DIMENSIONS IN mm			