

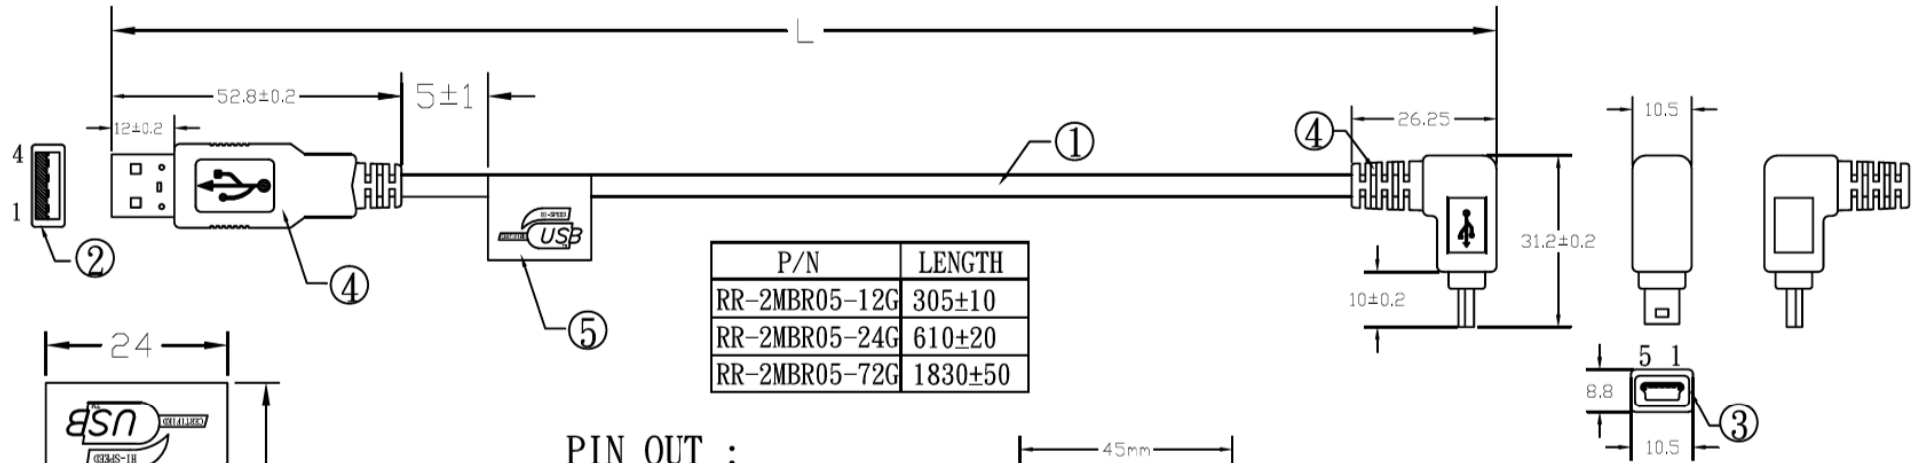


CHANGE VERSION	REMARKS	C	
A 08/01/11	REL	D	
B 08/05/21	CHENGE P/N	E	



P/N	LENGTH
RR-2MBR05-12G	305±10
RR-2MBR05-24G	610±20
RR-2MBR05-72G	1830±50

PIN OUT :

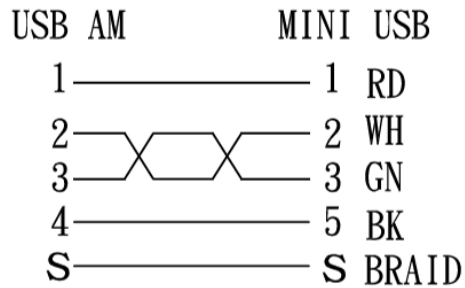

P/N STICKER

RoHS

MATERIAL LIST :

NO.	P/NAME	DESCRIPTION	Q' TY
1	WIRE	UL2725 28AWG(7/0.12 TC)*1P+24AWG(7/0.20 TC)*2C+AL+1(BC)+B (64B AM) OD:5.0±0.15 BLACK (B792) 2.0 VERSION	1
2	PLUG	USB"A" TYPE MALE GOLD PLATED	1
3	PLUG	MINI USB"B"TYPE 5P MALE GOLD PLATED	1
4	PVC	45P BLACK (B792)PVC	12g
5	STICKER	AS ABOVE (24*40mm)	1
6	PACKAGE	IPCS/PE BAG:06*3"*8"+P/N STICKER	1

MOLD TOOL NO.	www.USBFireWire.com			DRAWN BY
"A" TYPE A110-160-001				MARCOS
MINI USB A110-554-001	SCALE	UNIT	REV	CHECKED BY
		MM	B	CONFIRMED BY
	FILE NAME	CUSTOMER		CHECKED BY
	OW0801022			
	DATE	CUSTOMER P/N		APPROVED BY
	08/05/21	RR-2MBR05-XXG		