

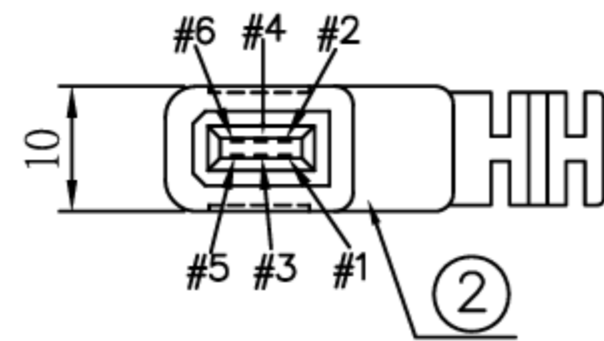


D		09.11.25	N20911313	DESCRIPTION CONTROL			
E		12.05.21	N21205115	REV	DESC	DATE	APP
F		13.01.25		C		09.11.05	N20911039

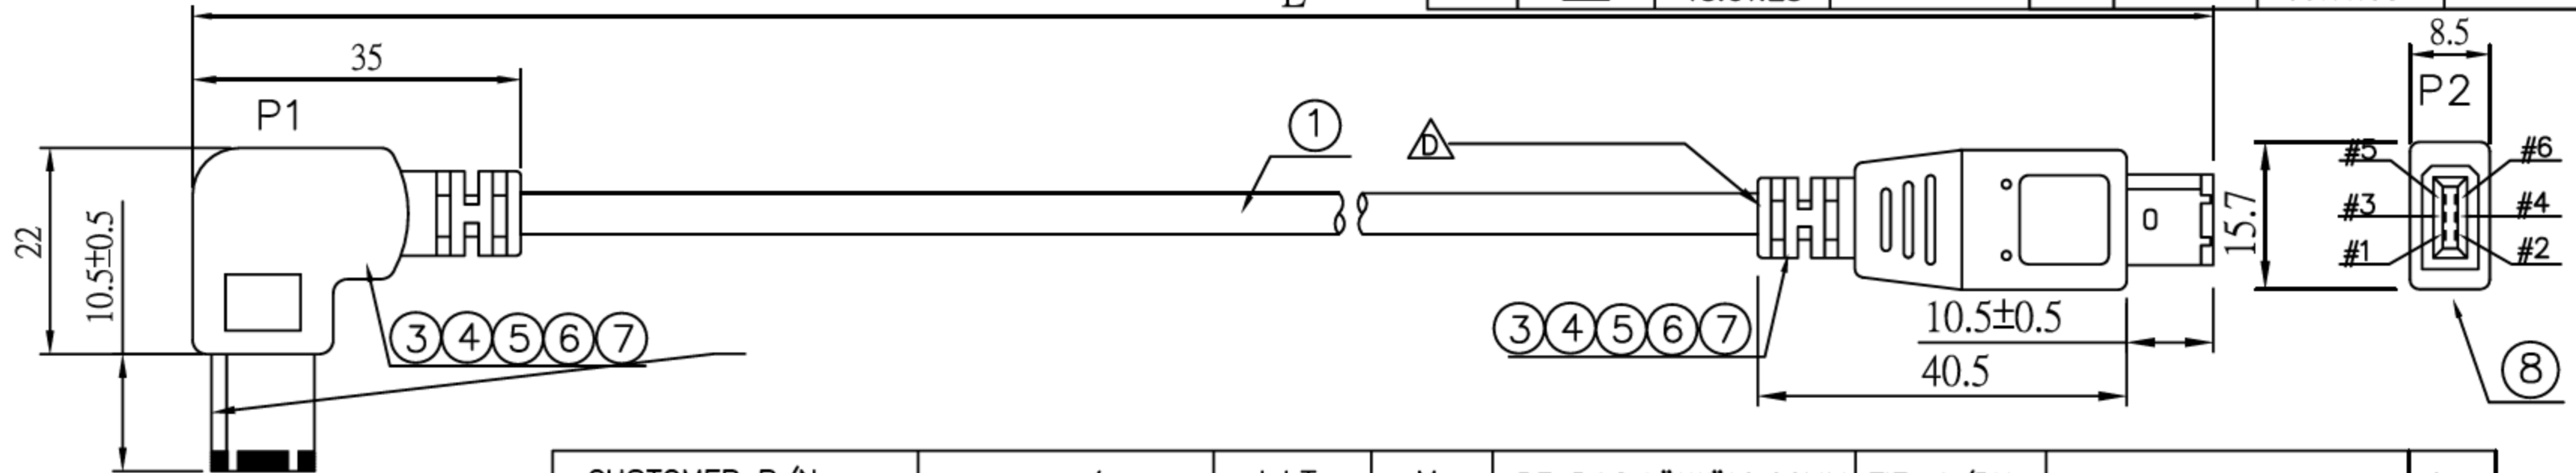


CUSTOMER P/N	Y-S P/N	L±T	M	PE BAG: L*W*0.06MM	TIE-A/BK	CARTON:46*30*LCM	QTY
RR-6L6S-396G	IE0006061L02331	10060±100	10.07	PE BAG: 10*12*0.06MM		CARTON:46*30*25CM	A/R
RR-6L6S-09G	IE0006061L12331	230±20	0.24	PE BAG: 5*6*0.06MM		CARTON:46*30*25CM	A/R
RR-6L6S-24G	IE0006061L22331	610±20	0.62	PE BAG: 5*6*0.06MM	80*1	CARTON:46*30*25CM	1/300
RR-6L6S-72G	IE0006061L32331	1830±30	1.84	PE BAG: 6*8*0.06MM	100*1	CARTON:46*30*25CM	A/R
RR-6L6S-180G	IE0006061L42331	4570±50	4.58	PE BAG: 7*10*0.06MM		CARTON:46*30*20CM	1/50
RR-6L6S-32G	IE0006061L52331	813±20	0.81	PE BAG: 5*6*0.06MM	80*1	CARTON:46*30*20CM	

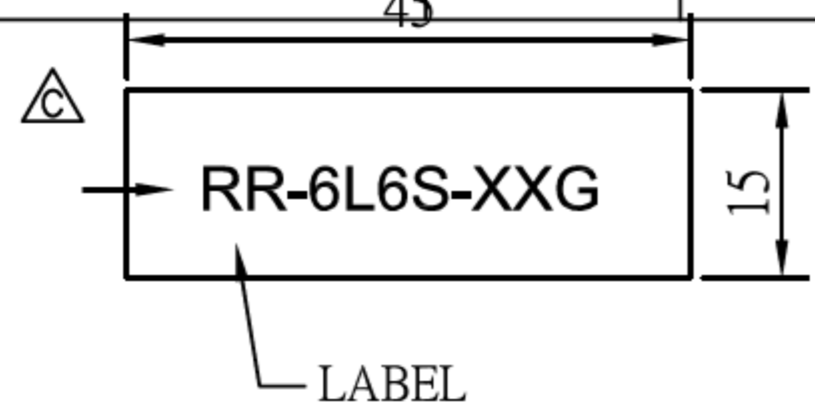

*	390	LABEL:"RR-6L6S-XXG"45*15MM		1	PCS
*	390	CARTON:46*30*LCM		A/R	PCS
*	390	PE BAG:30*28*0.08MM		A/R	PCS
*	390	TIE-A/BLACK		***	MM
*	390	PE BAG:L*W*0.06MM		1	PCS
8	110111006009	IEEE1394-6P<BLACK><MOLDING TYPE>		1	PCS
7	370	HI TEAMP TAPE:W:8MM		40*4	MM
6	370	HI-TEAMP-TAPE:W:6MM		35*2	MM
5	210	TUBE-HT-ø1.5MM		12.0*2	MM
4	370	FOIL-AL-20MM		40*2	MM
3	370	PVC-BLACK10/80		14.0	G
2	110111006023	IE1394-6P<BK>		1	SET
1	1308061100041	30/22-(1P+A+B)*2/2C+MYLAR+A+B -BK10-5.5U20276		L	M
NO	PART NO.	DESCRIPTION		QTY	UNIT

RoHS COMPLIANT

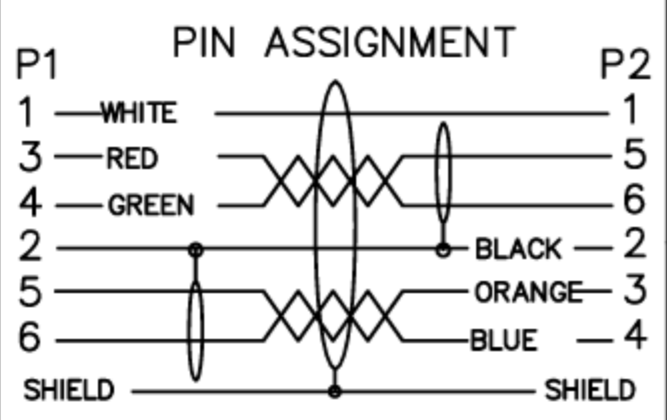

www.USBFireWire.com

		ITEM: IE0006061LX2331	REV F
DRAWN, BY: 苗云麗		SCALE: NONE	DATE: 2009-09-07
CHECKED, BY:		CUSTOMER: C331	PAGE: 1/1
APP'ED, BY:		CUSTOMER P/N:	

ALL DIMENSIONS IN mm