


REV	DESC	DATE	ECN NO.
0		2013-05-29	N2013051760
P		2014-04-23	N2014043352
Q		2015-09-14	N2015084921

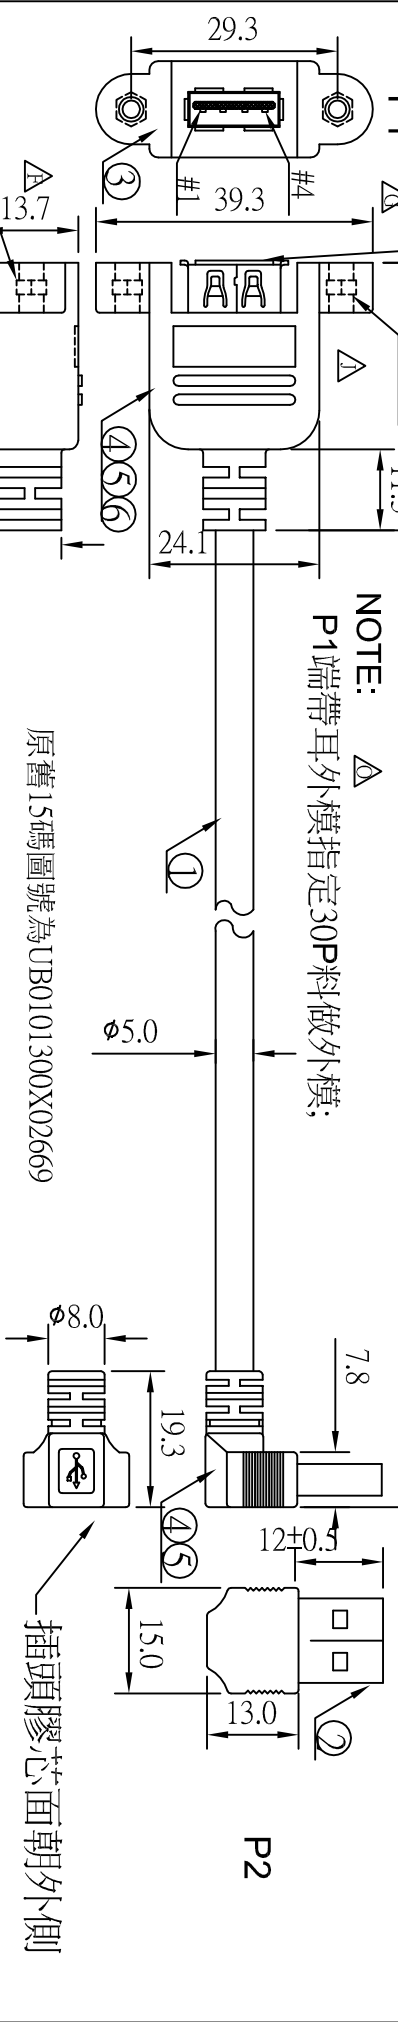

CUSTOMER P/N	Y-S P/N	L+T	M	QTY	TIE
RR-AAR02TP-06G	UB2001013L12669	152±10	0.152	A/R	
RR-AAR02TP-12G	UB2001013L22669	305±15	0.305	A/R	
RR-AAR02TP-20G	UB2001013L32669	508±20	0.51	1/300	80.0*1
RR-AAR02TP-24G	UB2001013L42669	610±20	0.61	A/R	80.0*1

原舊15碼圖號為UB0101300X02669

NOTE:  
1.同UB0101300X02668  
只是P2端插頭方向不同

2PCS螺絲裝小  
PE袋附成品袋中

ROHS COMPLIANT

NO	TYPE	DESCRIPTION	QTY	UNIT
*		TTE-A-BK10	***	MM
*		PE-BAG:2.5"*2.5"*0.06MM(裝2PCS螺絲)	1	PCS
*		LABEL:45*15MM"RR-AAR02TP-XXG"	1	PCS
*		CARTON:46*30*25CM	A/R	PCS
*		PE BAG:30"*28"*0.08MM	A/R	PCS
*		300030000193		PCS
8		240010700138	2	PCS
7		240020000008	2	PCS
6		120020000001	5.0	G
5		120010000116	13.5	G
4		240010700138	0.3	G
3		110082304028	1	PCS
2		110081304129	1	SET
1		1303041100003	L	M

PIN ASSIGNMENT

P1	P2
1 — RED	1 — WHITE
2 — WHITE	2 — GREEN
3 — GREEN	3 — BLACK
4 — BLACK	4 — BRAID
S — BRAID	S —

NOTE:  
A母頭需與外模平齊  
P1端帶耳外模指定30P料做外模;  
Plastic Tongue (Black Shaded Area)  
插頭膠芯面朝外側

USB FIREWIRE .COM

ITEM: UB2001013LX2669

SCALE: NONE

CUSTOMER: C31 (陸鴻)

DATE: 2007-10-18

PAGE: 1/1

CUSTOMER P/N: RR-AAR02TP-XXG

ALL DIMENSIONS IN mm