
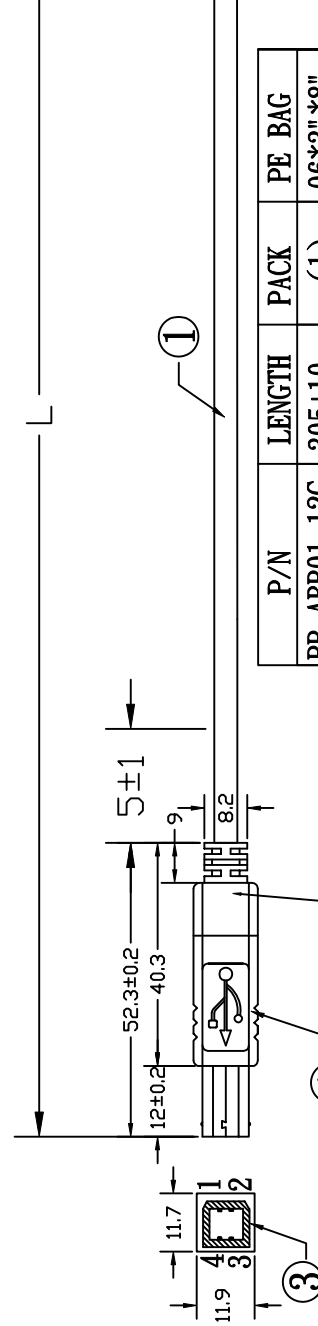




CHANGE VERSION	REMARKS	C	08/08/25	CHANGE P/N	F	12/10/09	CHANGE CABLE, REMOVE STICKER
A	07/09/20 REL	D	10/05/11	SELF REMARK	G	14/10/31	CHANGE PACKAGE
B	08/01/19 CHANGE STICKER	E	11/10/06	CHANGE CABLE, ADD BRAID WAY	H		

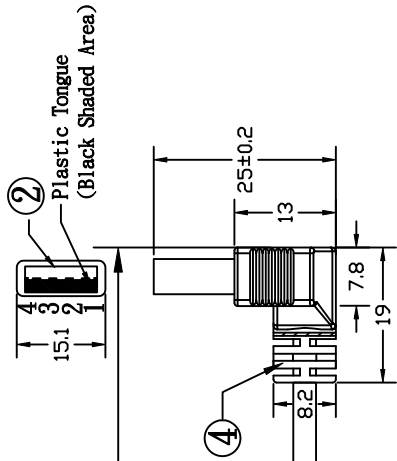

NEW BRAID ASS'Y WAY  
OW1105033

P/N	LENGTH	PACK	PE BAG
RR-ABR01-12G	305±10	(1)	06*3" *8"
RR-ABR01-24G	610±20	(2)	06*5" *7"
RR-ABR01-72G	1830±30	(2)	06*6" *8"

PIN OUT :

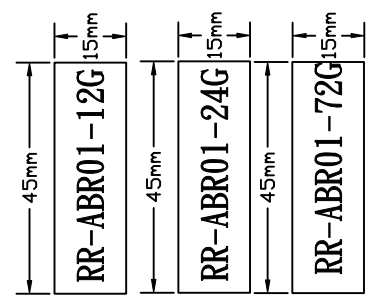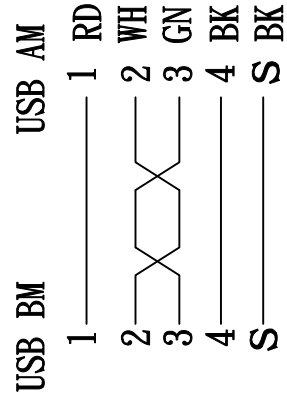

MATERIAL LIST :

NO.	P/NAME	DESCRIPTION	Q' TY
1	WIRE	UL2725 28AWG(7/0.12 TC)*IP+24AWG(7/0.20 TC)*2C+AL+1(TC)+B(16*4/0.10 TC) OD:5.0±0.15 BLACK(B792) 2.0 (CHINGLUNG)	1
2	PLUG	USB"A" TYPE MALE GOLD PLATED SHORT TYPE	1
3	PLUG	USB"B" TYPE MALE GOLD PLATED	1
4	PVC	45P BLACK(B792)PVC	12g
5	PACKAGE	1PCE/PE BAG:06*A*8"B" + P/N STICKER	1

**ROHS**

DRAWN BY	MARCOS
CHECKED BY	
CONFIRMED BY	
CHECKED BY	
APPROVED BY	

MOLD TOOL NO.		www.USBFireWire.com	
AM	A110-459-001	SCALE	UNIT
BM	A110-165-001	CUSTOMER	REV
		FILE NAME	MM
		OW0708021	G
		DATE	
		CUSTOMER P/N	
		RR-ABR01-XXG	