


FILE NO: UB-X04930

DESCRIPTION CONTROL


REV	DESC	DATE	ECN NO.
B		2010-07-23	N21007176
C		2010-08-17	N21008123
D		2011-05-13	N21105080

PLASTIC TONGUE (BLACK SHADED AREA)

New Braid Ass'y Way

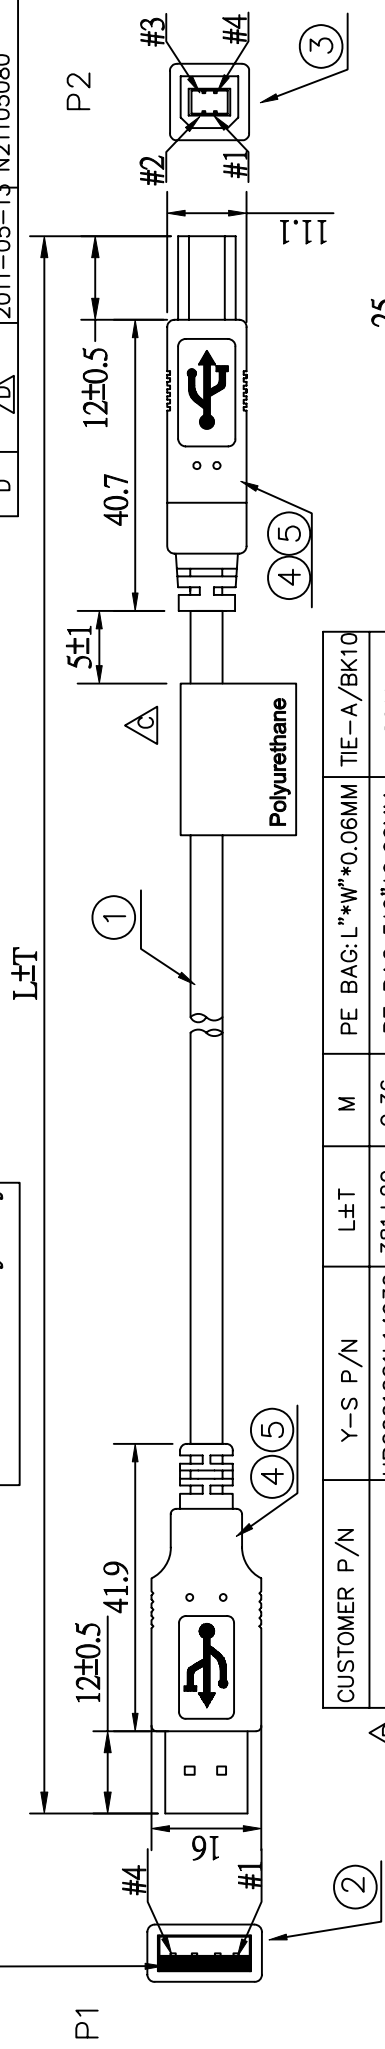

CUSTOMER P/N	Y-S P/N	L±T	M	PE BAG: L*W*0.06MM	TIE-A/BK10
RR-AMBM-15GP	UB2001021L14930	381±20	0.36	PE BAG: 5*6*0.06MM	80*1
RR-AMBM-30GP	UB2001021L24930	762±30	0.75	PE BAG: 5*6*0.06MM	100*1
RR-AMBM-60GP	UB2001021L34930	1524±30	1.51	PE BAG: 5*6*0.06MM	100*1
RR-AMBM-180GP	UB2001021L44930	4572±30	4.56	PE BAG: 7*10*0.06MM	PE FLIM

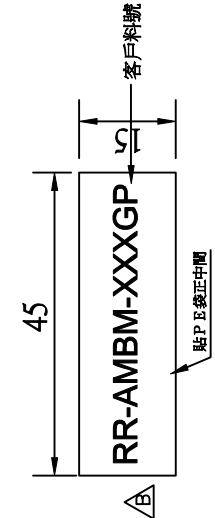

空白部分
顏色是blue (Pantone 544)
<需防水>

LABEL貼P2端線材

ROHS COMPLIANT

NOTE:
REF: UB01021-4900&UB02023-1113

NO	TYPE	DESCRIPTION	QTY	UNIT
* 330010016543		LABEL: "Polyurethane" 40*25MM <藍底黑字> <需防水>	1	PCS
390		LABEL: "RR-AMBM-XXXGP" 45*15MM <白底黑字>	1	PCS
220030000363		TIE-A-BK	***	MM
310000000012		CARTON: 46*30*25CM	A/R	PCS
300010000001		PE BAG: 30*28*0.08MM	A/R	PCS
390		PE BAG: L*W*0.06MM	1	PCS
5 210010000328		FOIL-CU-8MM	26*2	MM
4		TPE-BK10/50P <低煙無鹵>	13.6	G
3 181-041033-C		USB-B-P<WHITE> <鍍銀鍍金>	1	SET
2 180-041033-C		USB-A-P<WH>/L <鍍銀鍍金>	1	SET
1 1303041101771		UL2725,(1P+2C)+AB,BK10, OD: 4.8(28/24)<REV: 2.0><低煙無鹵>	L	M

INNER MOLDING	USB.A-01	USB.B02
OUTER MOLDING		

www.USBFireWire.com

PIN ASSIGNMENT	ITEM:	RR-AMBM-XXXGP	REV
P1	USB-A-P<WH>/L TO USB-B-P<WH>		B
1	RED		E
2	WHITE		
3	GREEN		
4	BLACK		
S	BRAID		
	SCALE: FREE	DATE: 2010/07/15	
	CUSTOMER: C331<陸濤>	PAGE: 1/2	
	CUSTOMER P/N: RR-AMBM-XXXGP		

ALL DIMENSIONS IN mm