



DESCRIPTION CONTROL			
REV	DESC	DATE	ECN NO
L		2017.04.24	

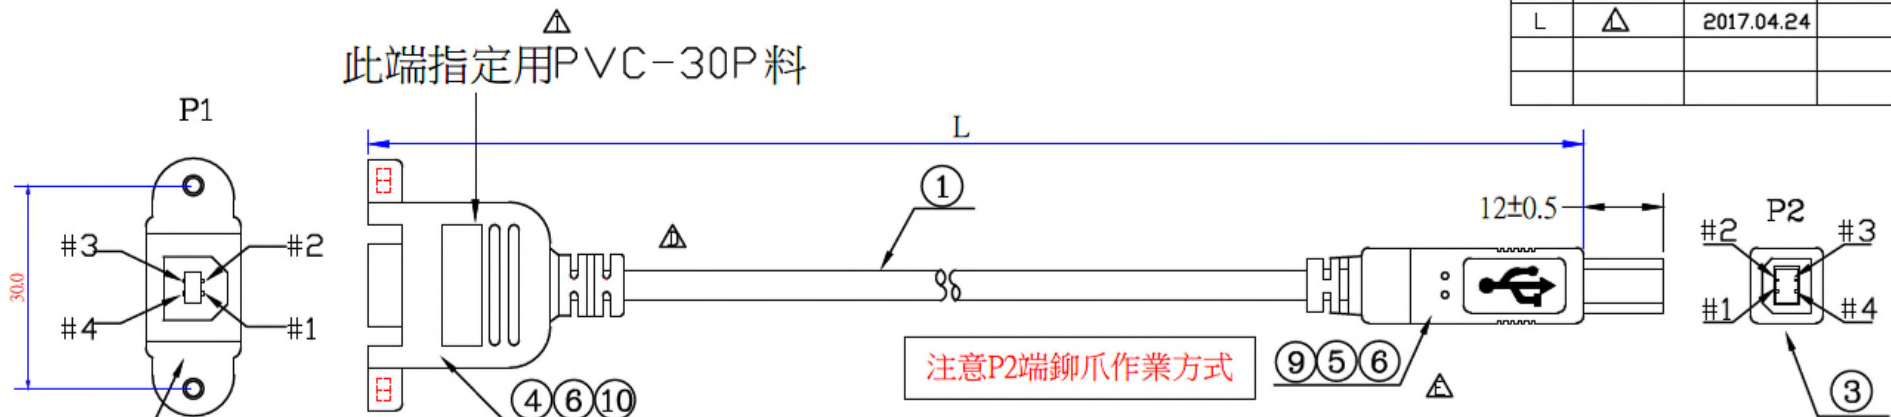

內裝六角螺母
4-#40UNC



RoHS COMPLIANT


PIN ASSIGNMENT

P1		P2
1	RED	1
2	WHITE	2
3	GREEN	3
4	BLACK	4
S	BRAID	S

CUSTOMER P/N	L±T	M	TIE	PE BAG:L*W*0.06MM	QTY
RR-BMBFPM-04G	100±15	0.1		PE BAG:3*6*0.06MM	A/R
RR-BMBFPM-12G	305±15	0.3	80*1	PE BAG:5*6*0.06MM	A/R
RR-BMBFPM-20G	508±20	0.5	100*1	PE BAG:5*6*0.06MM	A/R
RR-BMBFPM-24G	610±20	0.6	100*1	PE BAG:5*6*0.06MM	1/300

* 390	PE BAG:2.5*2.5*0.06MM		1	PCS
* 390	CARTON:46*30*25CM		A/R	PCS
* 390	PE BAG:30*28*0.08MM		A/R	PCS
* 390	PE BAG:L*W*0.06MM		1	PCS
* 390	LABEL:RR-BMBFPM-XXG*45*15MM		1	PCS
10	PVC-BLACK10/30		9.0	G
9	210010000328 FOIL-CU-8MM		26*1	MM
8	240020000008 NUTS:4.75*2.0MM<4#-40>		2	PCS
7	2400107000138 SRW:5.4*9.8MM<全牙>		2	PCS
6	120020000001 PE-5321		4.5	G
5	120010000031 PVC-BK10/50		6.0	G
4	SOL-WIRE-FULL TIN-1.0		0.2	G
3	181-041033-X-C USB-B-P<WHITE> <鐵殼鍍金><信而昌>		1	SET
2	110082304081 USB-B-S<WH> <鐵殼鍍金>		1	SET
1	1303041100001 28#*1P+24#*2C+A+B-BK10-Ø4.8 UL2725<REV:2.0X指定聯輝>		L	M
NO	TYPE	DESCRIPTION	QTY	UNIT

NOTE: 1. 0.1M長規格作業時需先成型B母頭,再成型B公頭;
2. 螺絲隻需用小PE袋,包裝後附在PE袋內即可

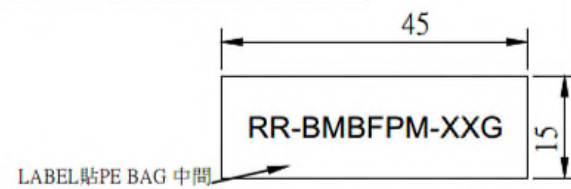

INNER MOLDING	USB.B368KF		
OUTER MOLDING	USB.B369KF	USB.B02	
<small>THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY INFORMATION OF BR BUSINESS VENTURE, LLC. THE POSSESSOR AGREES TO MAINTAIN THIS DOCUMENT IN CONFIDENCE, NOT REPRODUCE IT OR COPY IT, AND NOT TO REVEAL OR PUBLISH IT IN WHOLE OR PART. COPYRIGHT © 2015</small>			
		ITEM: RR-BMBFPM-XXG	REV L
DRAWN BY: 易莉		SCALE: NONE	DATE: 2009.07.09
CHECKED BY:		CUSTOMER: C331<陸鴻>	PAGE: 1/2
APPROVED BY:		CUSTOMER P/N:	
ALL DIMENSIONS IN mm (UNLESS OTHERWISE SPECIFIED)			