
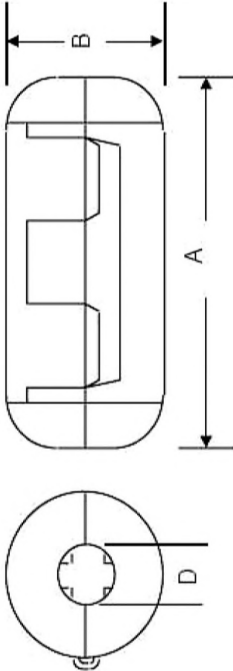


SPECIFICATION FOR APPROVAL

CUSTOMER: www.USBFireWire.com		CUSTOMER'S PART NAME																												
DESCRIPTION: SNAP ON FERRITE BEAD - RR-FH0-500B		DATE: 2005/7/12																												
(1) MECHANICAL ASSEMBLY																														
		<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 10%;">A</td> <td style="width: 10%;">29.3±0.5</td> <td style="width: 10%;">m/m</td> </tr> <tr> <td>B</td> <td>16.0±0.5</td> <td>m/m</td> </tr> <tr> <td>D</td> <td>5.3±0.3</td> <td>m/m</td> </tr> <tr> <td> </td> <td> </td> <td> </td> </tr> <tr> <td> </td> <td> </td> <td> </td> </tr> <tr> <td> </td> <td> </td> <td> </td> </tr> <tr> <td> </td> <td> </td> <td> </td> </tr> <tr> <td> </td> <td> </td> <td> </td> </tr> <tr> <td> </td> <td> </td> <td> </td> </tr> </table>		A	29.3±0.5	m/m	B	16.0±0.5	m/m	D	5.3±0.3	m/m																		
A	29.3±0.5	m/m																												
B	16.0±0.5	m/m																												
D	5.3±0.3	m/m																												
1ST COLOR		2ND COLOR	3RD COLOR																											
			4 TH COLOR																											
(3)																														
(2) ELECTRICAL REQUIREMENTS																														
Impedance	80 Ω (MIN)	TEST FREQUENCY	25MHZ																											
Impedance	140 Ω (MIN)	TEST FREQUENCY	100MHZ																											
Q		TEST FREQUENCY																												
SRF		TEST FREQUENCY																												
IDC		TEST FREQUENCY																												
(4) TEST INSTRUMENTS																														
<input type="checkbox"/> HP 34401A MULTIMETER <input type="checkbox"/> HP 4260A UNIVERSAL BRIDGE <input checked="" type="checkbox"/> HP4191A/ HP16092A <input type="checkbox"/> DELICA HAM 310 GRID-DIP METER <input type="checkbox"/> DMC-230 DIGITAL DIP METER <input type="checkbox"/> DMC-470 DIGITAL DIP METER <input type="checkbox"/> DIGITAL MULTIMETER, SC-7401																														
																														
<input type="checkbox"/> HP 4815A RF VECTOR IMPEDANCE METER <input type="checkbox"/> HP 4195A NETWORK/SPECTRUM ANALYZER <input type="checkbox"/> AD-5812 DIGITAL LOW-OHM METER <input type="checkbox"/> HP 4285 PRECISION LCR METER (Q) <input type="checkbox"/> CHEN HWA 1061+CHEN HWA 301A (IDC) <input type="checkbox"/> HP 6632 A SYSTEM DC POWER SUPPLY FOR IDC <input type="checkbox"/> HP 4338 A /B MILLIOHM METER		APPROVED BY																												
REVISION	DRAWN BY	MAT'L	SPEC.																											
	CHECKED BY																													
		MATERIAL	B15 Nickel/Zinc																											
		TEST WIRE	A WG#18x10cm																											
		WINDING	1 Turn																											
		Uiac	1500 ± 25 %																											
		CASE	66 Nylon (94V-2) UL E41938																											
			DRAWN BY LEER CHANG																											

www.USBFireWire.com - T: 877-522-3779 E: sales@usbfirewire.com

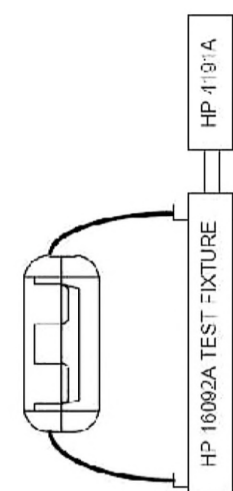

THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY INFORMATION OF USB FIRE WIRE. IT IS TO BE USED ONLY FOR THE PURPOSES SPECIFIED IN THIS DOCUMENT AND IS NOT TO BE REPRODUCED OR COPIED IN ANY MANNER WITHOUT THE WRITTEN PERMISSION OF USB FIRE WIRE. THE FOLLOWING INFORMATION IS TO BE KEPT CONFIDENTIAL:

1. MAINTAIN THIS DOCUMENT IN CONFIDENCE
2. NOT TO REPRODUCE OR COPY IT
3. NOT TO REVEAL OR PUBLISH IT IN WHOLE OR IN PART