

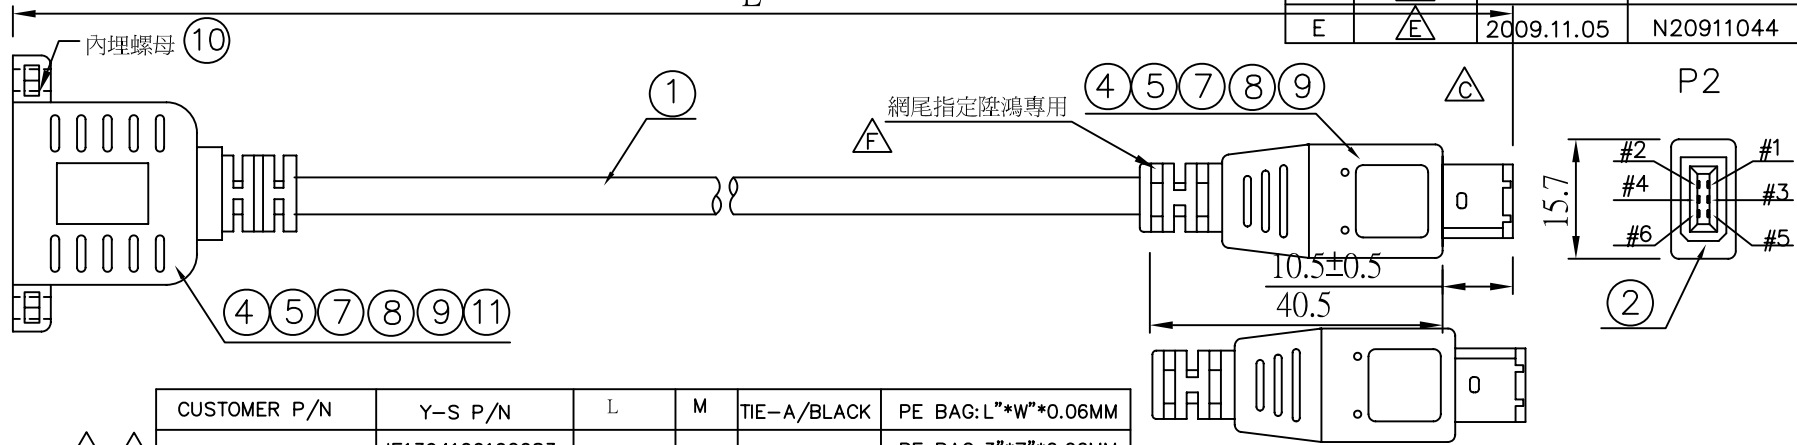
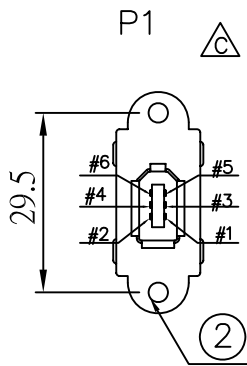


F	△	2009.11.25	N20911313	DESCRIPTION CONTROL	
REV	DESC	DATE	ECN NO.		
C	△	2009.09.30	N20909217		
D	△	2009.10.31	N20911001		
E	△	2009.11.05	N20911044		

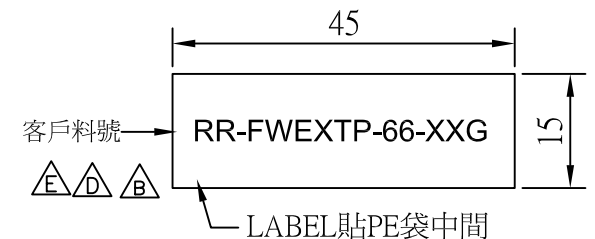


△	△	CUSTOMER P/N	Y-S P/N	L	M	TIE-A/BLACK	PE BAG: L"*W"*0.06MM
△	△	RR-FWEXTP-66-06G	IE1394100102083	152±15	0.14		PE BAG: 3"*7"*0.06MM
△	△	RR-FWEXTP-66-14G	IE1394100202083	355±20	0.34		PE BAG: 5"*6"*0.06MM
△	△	RR-FWEXTP-66-20G	IE1394100302083	510±20	0.5	80.0	PE BAG: 5"*6"*0.06MM
△	△	RR-FWEXTP-66-44G	IE1394100402083	1117±20	1.107	100.0	PE BAG: 5"*6"*0.06MM
△	△	RR-FWEXTP-66-72G	IE1394100502083	1830±30	1.82	110.0	PE BAG: 6"*8"*0.06MM



NOTE:
 1.有打樣.
 2.P2端網尾指定陸鴻專用△

RoHS COMPLIANT

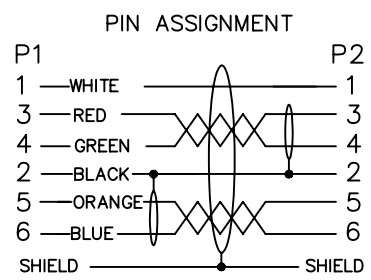

					*	390	PE BAG:2.5"*2.5"*0.06MM<裝2PCS螺絲>	△	C	1	PCS	
					*	390	LABEL:45*15MM"RR-FWEXTP-66-XXG"	△	E	D	1	PCS
11	390	ABS料-BK				3.5	G				***	MM
10	240020000008	NUTS:4.75*2.0(4-40#)				2	PCS				A/R	PCS
9	370	HI TEAMP TAPE:W:8MM				40*1	MM				A/R	PCS
8	370	HI-TEAMP-TAPE:W:6MM				35*1	MM				1	PCS
7	210	TUBE-HT-∅1.5MM				12.0*1	MM	INNER MOLDING	IEEE1394-075KF			
6	210	FOIL-AL-6MM				30*1	MM	OUTER MOLDING	IEEE1394-076KF	IEEE-1394-001		
5	370	PVC-BK10/50				14	G					
4	370	PVC-IN				3.5	G					
3	110111006009	IE1394-6P<BK><MOLDING TYPE> <鐵殼鍍金>				1	SET					
2	△	IE1394-6S<BK>成型式,鍍金<帶馬口鐵><連津>				1	PCS					
1	1308061100041	30/22-(1P+A+B)*2/2C+MYLAR+A+B -BK10-5.5U20276 <聯穎或同級品>				L	M					
NO	PART NO.	DESCRIPTION	QTY	UNIT								

www.USBFireWire.com

	ITEM: IE1394100XX2083	REV: G
DRAWN, BY: 鐘有涓	SCALE: NONE	DATE: 2007-10-26
CHECK, BY:	CUSTOMER: C331 <陸鴻>	PAGE: 1/1
APP, BY:	CUSTOMER P/N: RR-FWEXTP-66-XXG	

ALL DIMENSIONS IN mm