

1

2

3

4

Notes: (Unless Otherwise Specified)

1. Waterproof Rate: IP68.
2. Recommend Panel Thickness: 0.8 to 6.0 mm.
3. Recommend Torque: 19~20 Kgf-cm.
4. RoHS Compliant.

△ 5. 產品採用無Logo PE袋單PCS包裝,並將標籤貼於袋外.

RR-111210-05-XX_REV:XX_QTY:1PCS


LOT: XXXX
Made in China

△ 6. 每25PCS產品再用防水袋包裝,並將標籤貼於袋外.



RR-111210-05-XX_REV:XX_QTY:25PCS

LOT: XXXX
Made in China

7. 標籤上的REV: 請依照成品圖面版本.
8. 不可使用夾鍊袋.

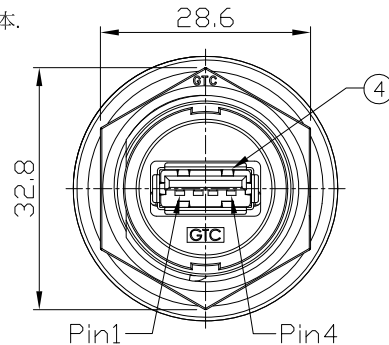


Conn.

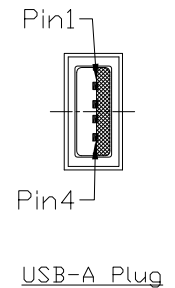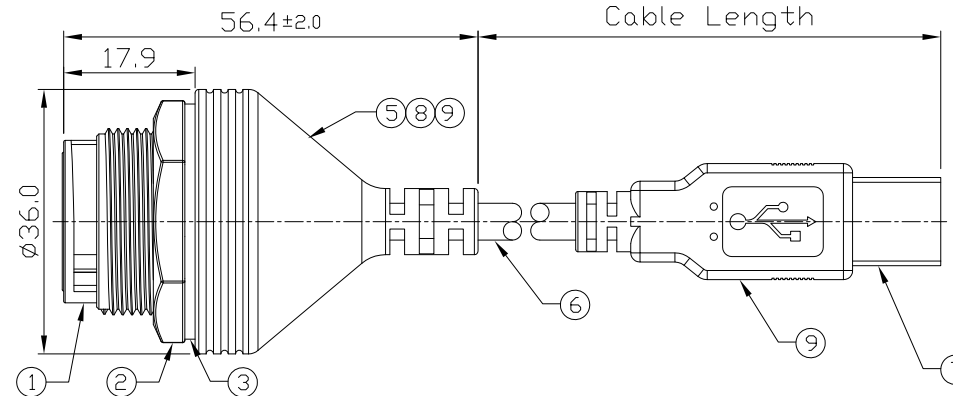


USB-A Plug

9	Over Mold	PVC Color: Black	2
8	Inner Mold	Thermoplastic Color: White	1
7	USB-A Plug	Housing: Thermoplastic, Color: Black Contacts: Copper Alloy, Finish: Au Plated Shell: Cold Roll Steel, Finish: Ni Plated	1
6	Cable	UL2725 1P*28AWG+2C*24AWG+Al/My+D+B Color: Black, OD=5.0mm	1
5	PCB	FR-4 Color: —	1
4	USB-A Receptacle	Housing: Thermoplastic, Color: Black Contacts: Copper Alloy, Finish: Au Plated Shell: Copper Alloy, Finish: Ni Plated	1
3	Gasket	Silicone Color: Black	1
2	Hex Nut	Thermoplastic Color: Black	1
1	Housing	Thermoplastic Color: Black	1
Item	Part Name	Material / Finish	Q'TY

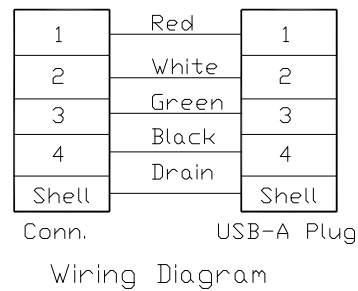

Wiring Diagram

Recommend
Panel Cut-Out

RR-111210-05-118	2997 mm	+100
RR-111210-05-39	1000 mm	±40
RR-111210-05-20	500 mm	±20
Part No.	Cable Length	Tol.

TITLE USB-A Plastic C4 Cable To Cable Jack Lock With Cable + USB-A Plug						DRAWING NUMBER RR-111210-05-XX			REV. A1	
DD NOT SCALE DRAWINGS	B	1:1	Joyce 06/06/12	Lucas 06/06/12	Ray 06/06/12	XX X.XX	± 0.5 ± 0.2	XXX ANGLES	± 0.05 ± 1°	mm
THIRD ANGLE PROJECTION	SIZE	SCALE	DRAW / DATE	CHECK / DATE	APPROVE / DATE	TOLERANCES			UNIT	SHEET



THE INFORMATION CONTAINED HEREIN IS PROPRIETARY
AND CONFIDENTIAL TO RR BUSINESS VENTURES, LLC. THE
POSSESSOR AGREES TO THE FOLLOWING
1. MAINTAIN THIS DOCUMENT IN CONFIDENCE
2. NOT TO REPRODUCE OR COPY IT
3. NOT TO REVEAL OR PUBLISH IT IN WHOLE OR PART