

1

2

3

4

DESCRIPTION OF REVISION

MASS PRODUCTION

09/02/09


REV

ECN#

A0

CABLE LENGTH

61.5±1

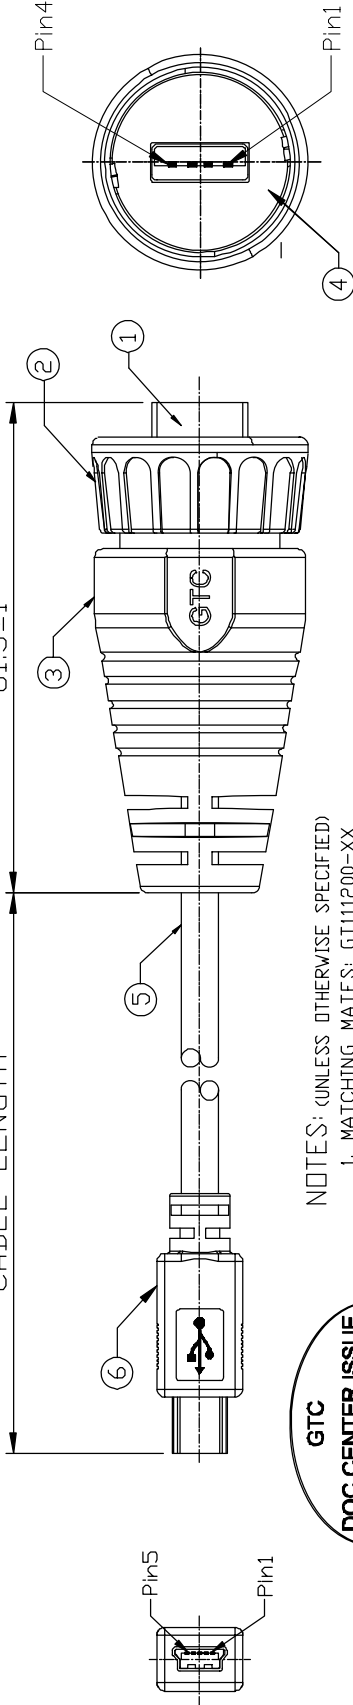

NOTES: (UNLESS OTHERWISE SPECIFIED)

- 1. MATCHING MATES: GT111200-XX
GT111200-XX-XX
- 2. CABLE LENGTH TOLERANCE:
0 to 1M:± 40 mm
1 to 10M:± 5% min
OVER 10 M:± 500 mm
- 3. PART NO:GT111220-07-XX
- 4. RoHS Compliance.

CABLE LENGTH
01: 1 M
02: 2 M
99: 99 M
A0: 100 M

ITEM	MATERIAL
1	HOUSING: THERMAL PLASTIC UL94 V-0 COLOR: BLACK CONTACTS: COPPER ALLOY FINISH: GOLD
2	THERMAL PLASTIC UL94 V-0 COLOR: BLACK
3	PVC COLOR: BLACK
4	SILICONE COLOR: BLACK
5	PVC COLOR: BLACK
6	HOUSING: THERMAL PLASTIC UL94 V-0 COLOR: BLACK CONTACTS: COPPER ALLOY FINISH: GOLD

METRIC

DRAWER	DATE
KAREN	09/02/09
APPROVED	DATE
RAY	09/02/09

DIMENSIONS ARE IN MILLIMETER TOLERANCES

XX	±0.5
XXX	±0.20
XXXX	±0.05
ANGLES	±0.5°

DO NOT SCALE DRAWINGS



THIRD ANGLE PROJECTION

SCALE

1:1

SHT 1 of 1

DRAWING NUMBER

RR-111220-07-XX

REV. A0

www.USBFireWire.com

NOTICE OF PROPRIETARY PROPERTY:
THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF USBFIREWIRE.COM. THE POSSESSOR AGREES TO THE FOLLOWING:
(1) TO MAINTAIN THIS DOCUMENT IN CONFIDENCE
(2) NOT TO REPRODUCE OR COPY IT
(3) TO REVEAL OR PUBLISH IT IN WHOLE OR PART
(4) ALL RIGHTS RESERVED

TITLE

PLASTIC USB-A CABLE END CONNECTOR
+ STANDARD CABLE+OVER MOLDED
STANDARD(NON-WATERPROOF)
MINI USB-B PLUG

WIRING DIAGRAM

Shield	Drain	Shield
5	Black	4
3	Green	3
2	White	2
1	Red	1
MINI USB-B	WIRE COLOR	USB-A

2

3

4