

Notes: (Unless Otherwise Specified)

1. Waterproof Rate: IP68.
2. RoHS Compliant.
3. 產品採用無Logo PE袋單PCS包裝,並將標籤貼於袋外.

RR-111221-06-XX_REV: XX_QTY: 1PCS
LOT: XXXX
Made in China


4. 每25PCS產品再用防水袋包裝,並將標籤貼於袋外.

RR-111221-06-XX_REV: XX_QTY: 25PCS
LOT: XXXX
Made in China

5. 標籤上的REV: 請依照成品圖面版本.
6. 不可使用夾鍊袋.





9	USB-A Jack	Housing: Thermoplastic, Color: White Contacts: Copper Alloy, Finish: Gold Flash Shell: SPCC, Finish: Ni Plated	1
8	Over Mold	PVC Color: Black	1
7	Inner Mold	Thermoplastic Color: White	1
6	Cable	UL2725 1P*28AWG+2C*24AWG+AL/My+D+B Color: Black, OD=5.0mm	1
5	Over Mold	PVC Color: Black	1
4	Inner Mold	PVC Color: Black	2
3	Rubber Pad	Silicone Color: Black	1
2	Lock Nut	Thermoplastic Color: Black	1
1	USB-A Plug	Housing: Thermoplastic, Color: Black Contacts: Copper Alloy, Finish: Au Plated Shell: Cold Roll Steel, Finish: Ni Plated	1
Item	Part Name	Material / Finish	QTY

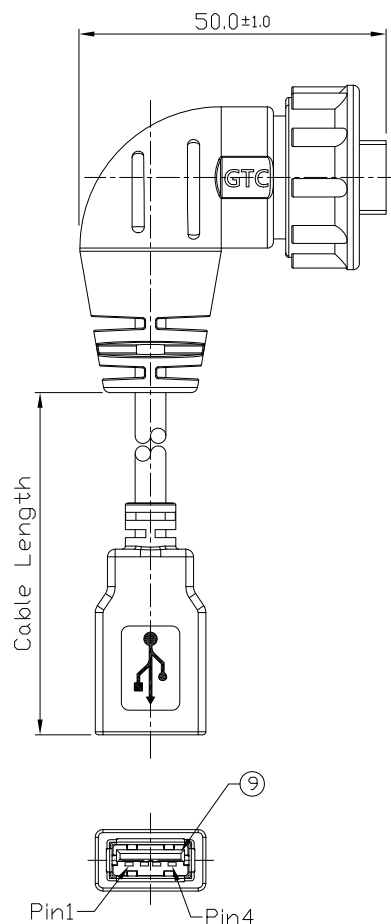

USB-A Plug

USB-A Jack

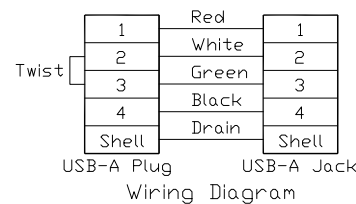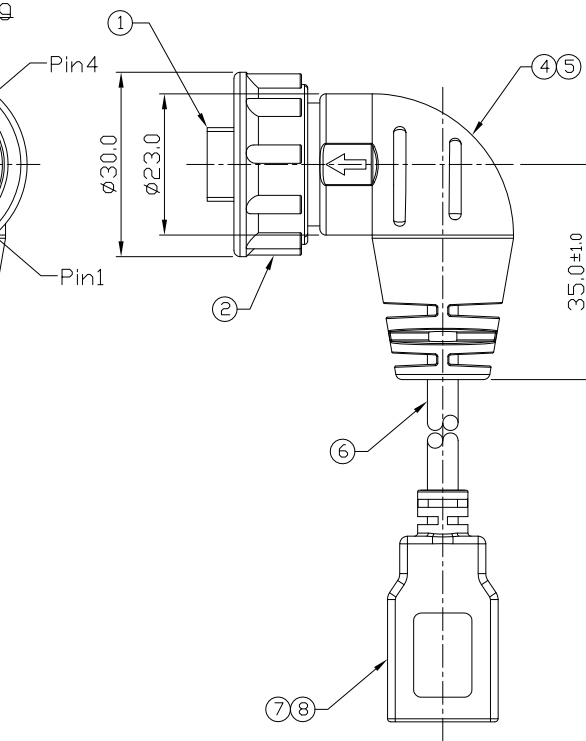

RR-111221-06-118	2997 mm	+100
RR-111221-06-20	508 mm	+50
Part No.	Cable Length	Tol.

TITLE						DRAWING NUMBER			REV.	
USB-A Plastic C4 Cable End Left Angel 90° Plug Lock With Cable + USB-A Jack						RR-111221-06-XX(20,118)			A0	
DO NOT SCALE DRAWINGS	B	1:1	Joyce 09/22/14	Lucas 09/22/14	Ray 09/22/14	X.X ± 0.5 X.XX ± 0.2	X.XXX ± 0.05 ANGLES ± 1°	mm	1/1	
THIRD ANGLE PROJECTION	SIZE	SCALE	DRAW / DATE	CHECK / DATE	APPROVE / DATE	TOLERANCES		UNIT	SHEET	

USBFIREWIRE.com
NOTICE OF PROPRIETARY PROPERTY:
THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF GT CONTACT CO., LTD. THE POSSESSOR AGREES TO THE FOLLOWING:
(i) TO MAINTAIN THIS DOCUMENT IN CONFIDENCE
(ii) NOT TO REPRODUCE OR COPY IT
(iii) NOT TO REVEAL OR PUBLISH IT IN WHOLE OR PART
(iv) ALL RIGHTS RESERVED