


1. Waterproof Rate : IP67
2. Recommend Panel Thickness : 0.8 to 6.0 mm
3. Recommend Torque: 6~7 Kgf-cm
4. Mating Cap P/N : RR-1C533122
5. RoHS Compliance


REV	ECN#	DESCRIPTION OF REVISION
01		120610

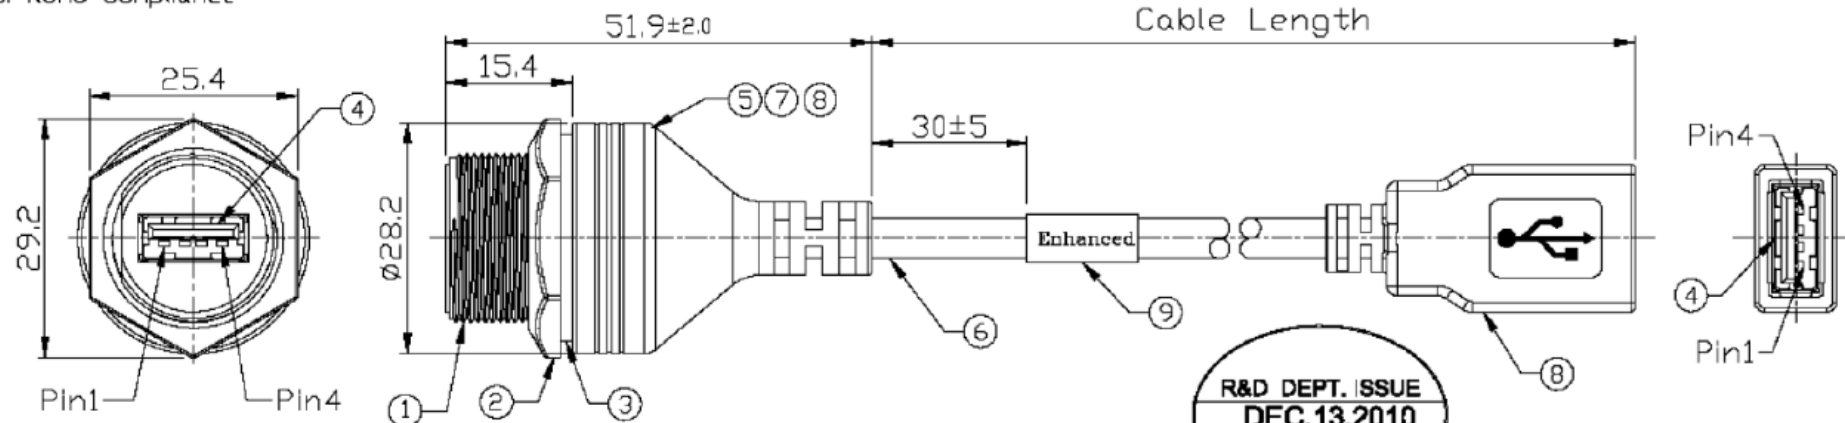

R&D DEPT. ISSUE
DEC.13.2010
ONLY FOR
RELEASE

1	Red
2	White
3	Green
4	Black
Shell	Drain

Wiring Diagram



Recommend
Panel Cut-Out

Item	Part Name	Material / Finish	QTY
1	Housing	Thermal Plastic Color: Black	1
2	Hex Nut	Thermal Plastic Color: Black	1
3	Gasket	Silicone Color: Black	1
4	USB-A Receptacle	Housing Thermal Plastic Color Black	2
		Contacts Copper Alloy Finish Au Plated	
		Shell Copper Alloy Finish Ni Plated	
5	PCB	FR-4 Color: Green	1
6	Cable	UL2725 1P*24AWG+2C*24AWG+AEB 95% OD=5.0mm, Color: Black	1
7	Inner Mold	Thermal Plastic Color: Black	1
8	Over Mold	PVC Color: Black	2
9	Label	Font Type: Roman & Size 2 Text Color: Black Text: Enhanced	1

METRIC		 USBFIREWIRE.com	
DRAFTER Vicky	DATE 12/06/10	THE INFORMATION CONTAINED HEREIN IS PROPRIETARY AND CONFIDENTIAL TO RR BUSINESS VENTURES, LLC. THE POSSESSOR AGREES TO THE FOLLOWING 1. MAINTAIN THIS DOCUMENT IN CONFIDENCE 2. NOT TO REPRODUCE OR COPY IT 3. NOT TO REVEAL OR PUBLISH IT IN WHOLE OR PART	
APPROVED Ray	DATE 12/06/10		
DIMENSIONS ARE IN MILLIMETER TOLERANCES		TITLE	
XX ±0.5 XXX ±0.20 XXXX ±0.05 ANGLES ±0.5°		USB-A C3 Panel Mount Over-Molded + 95% Braid USB Cable + USB-A Female Receptacle	
DO NOT SCALE DRAWINGS		DRAWING NUMBER RR-116310-EXT-XX	REV.
 THIRD ANGLE PROJECTION	SIZE B	SCALE 1:1	SHT 1 OF 1