

Notes: (Unless Otherwise Specified)


1. Waterproof Rate: IP68.
2. Recommend Panel Thickness: 0.8 to 6.0 mm.
3. Recommend Torque: 14~15 Kgf-cm.
4. Mating Cap P/N: GT1C5331X2.
5. RoHS Compliant.
6. 產品採用無Logo PE袋單PCS包裝,並將標籤貼於袋外.

RR-117300-09-XX_REV:XX_QTY:1PCS
LOT: XXXX
Made in China

7. 每25PCS產品再用防水袋包裝,並將標籤貼於袋外.


RR-117300-09-XX_REV:XX_QTY:25PCS
LOT: XXXX
Made in China

8. 標籤上的REV: 請依照成品圖面版本.
9. 不可使用夾鍊袋

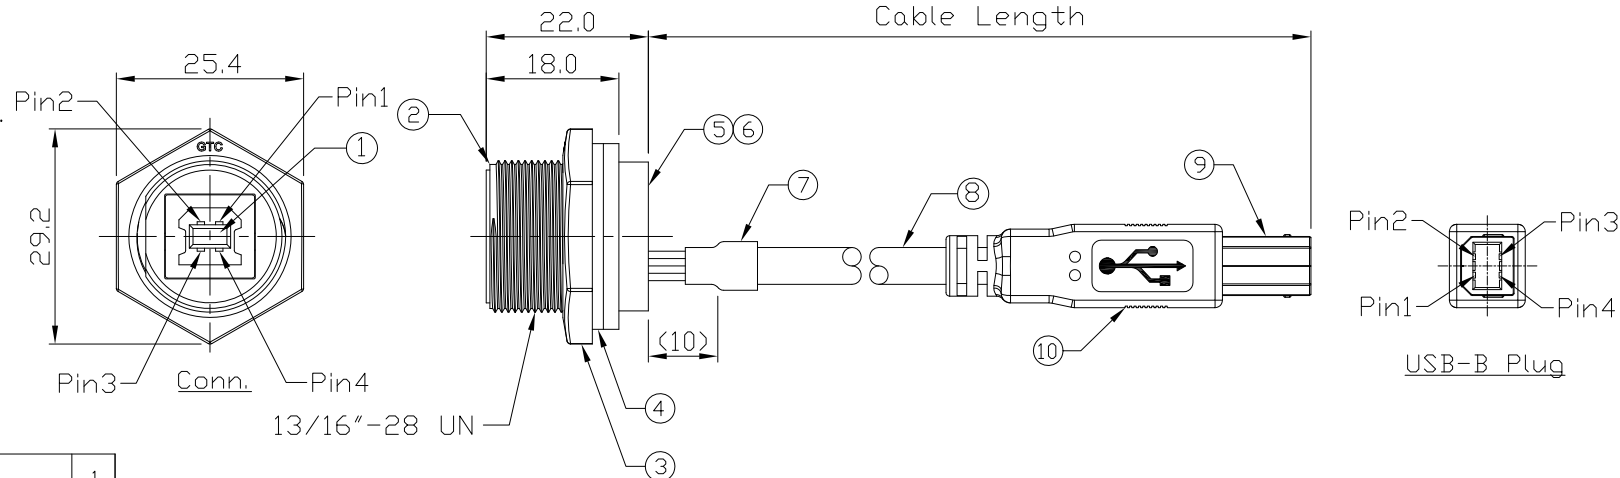


10	Over Mold	PVC Color: Black	1
9	USB-B Plug	Housing: Thermoplastic, Color: Black Contacts: Copper Alloy, Finish: Au Plated Shell: Cold Roll Steel, Finish: Ni Plated	1
8	Cable	UL2725 1P*28AWG+2C*24AWG+AL/My+D+B OD=5.0mm, Color: Black	1
7	Shrink Tube	L=20mm Color: Black	1
6	Glue	Epoxy Color: Black	1
5	PCB	FR-4 Color: —	1
4	Gasket	Gasket Color: Black	1
3	Hex Nut	Thermoplastic Color: Black	1
2	Housing	Thermoplastic Color: Black	1
1	USB-B Receptacle	Housing: Thermoplastic, Color: Black Contacts: Copper Alloy, Finish: Au Plated Shell: Copper Alloy, Finish: Ni Plated	1

Item	Part Name	Material / Finish	Q'ty
------	-----------	-------------------	------



Recommend
Panel Cut-Out

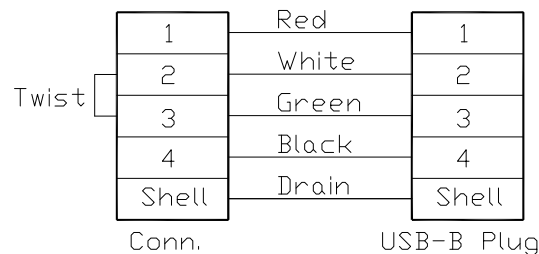

Wiring Diagram



RR-117300-09-40	1016 mm	±50
RR-117300-09-20	508 mm	±40
Part No.	Cable Length	Tol.



THE INFORMATION CONTAINED HEREIN IS PROPRIETARY AND CONFIDENTIAL TO RR BUSINESS VENTURES, LLC. THE POSSESSOR AGREES TO THE FOLLOWING:
1. MAINTAIN THIS DOCUMENT IN CONFIDENCE
2. NOT TO REPRODUCE OR COPY IT
3. NOT TO REVEAL OR PUBLISH IT IN WHOLE OR PART

TITLE						DRAWING NUMBER			REV.	
USB-B Plastic C3 Panel Jack Screw With Cable + USB-B Plug						RR-117300-09-XX			01	
DO NOT SCALE DRAWINGS	B	1:1	Joyce 03/20/15	Lucas 03/20/15	Ray 03/20/15	X.X X.XX	± 0.5 ± 0.2	X.XXX ANGLES	± 0.05 ± 1°	mm 1/1
THIRD ANGLE PROJECTION	SIZE	SCALE	DRAW / DATE	CHECK / DATE	APPROVE / DATE	TOLERANCES		UNIT	SHEET	