

1

2

3

4

Notes: (Unless Otherwise Specified)


1. Waterproof Rate: IP67.
2. Recommend Panel Thickness : 0.8 to 3.0 mm.
3. Recommend Torque: 9~10 Kgf-cm.
4. Mating Cap P/N: GT1C1210X2.
5. RoHS Compliant.
6. 產品採用無Logo PE袋單PCS包裝,並將標籤貼於袋外.

RR-11A200-05-10_REV:XX_QTY:1PCS
LOT: XXXX
Made in China

7. 每25PCS產品再用防水袋包裝,並將標籤貼於袋外.


RR-11A200-05-10_REV:XX_QTY:25PCS
LOT: XXXX
Made in China

8. 標籤上的REV: 請依照成品圖面版本.
9. 不可使用夾鍊袋.

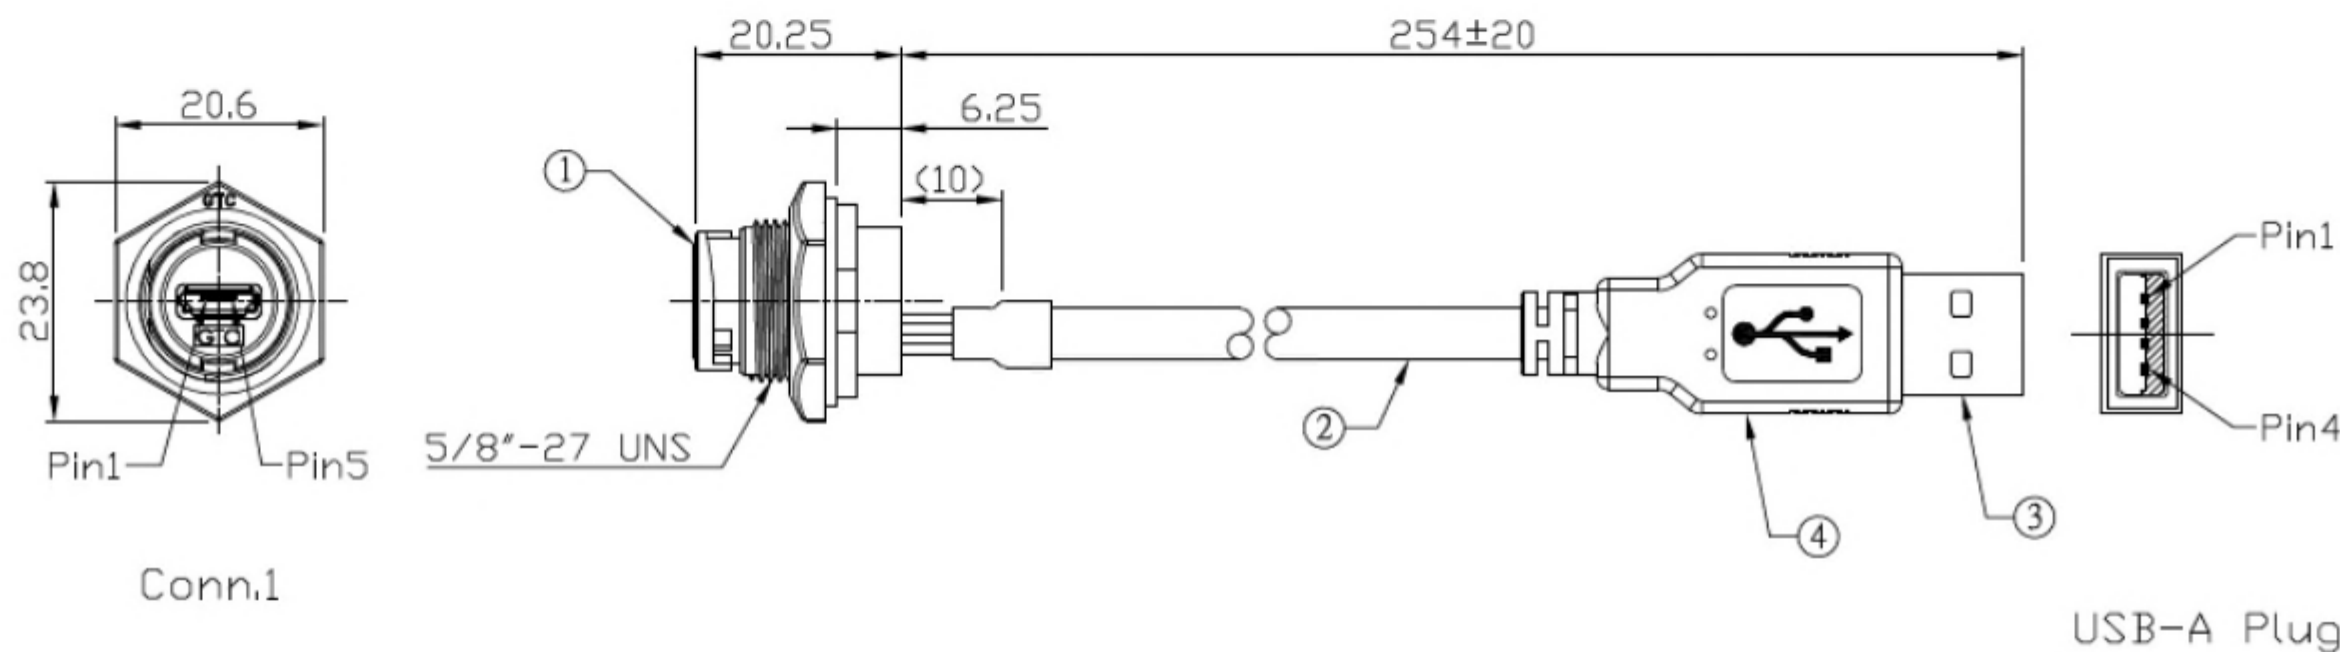

4	Over Mold	PVC Color: Black	1
3	USB-A Plug	Housing: Thermoplastic, Color: Black Contacts: Copper Alloy, Finish: Au Plated Shell: Copper Alloy, Finish: Ni Plated	1
2	Cable	UL2725 1P*28AWG+2C*24AWG+Al/My+D+B OD=5.0mm, Color: Black	1
1	Micro USB-AB Plastic C2 Panel	GT Contact P/N: GT11A200-05-XX	1
Item	Part Name	Material / Finish	Qty

Recommend
Panel Cut-Out

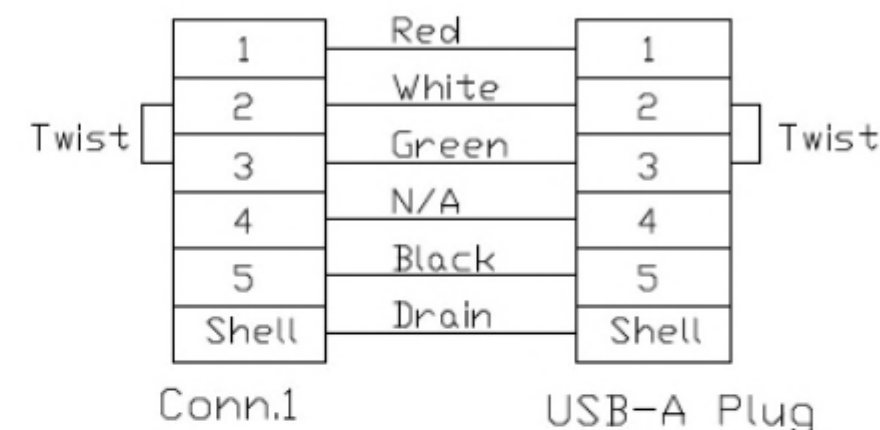

Wiring Diagram

TITLE						DRAWING NUMBER			REV.	
Mirco USB-AB Plastic C2 Panel Jack Lock With USB-A Plug						RR-11A200-05-10			01	
THIRD ANGLE PROJECTION		SIZE	SCALE	DRAW / DATE	CHECK / DATE	APPROVE / DATE	TOLERANCES	UNIT	SHEET	
DO NOT SCALE DRAWINGS		B	1:1	Lucas 07/21/14	Ray 07/21/14	Ray 07/21/14	X.X ± 0.5 X.XX ± 0.2	X.XXX ± 0.05 ANGLES ± 1°	mm	1/1



THE INFORMATION CONTAINED HEREIN IS PROPRIETARY AND CONFIDENTIAL TO RR BUSINESS VENTURES, LLC. THE POSSESSOR AGREES TO THE FOLLOWING:

1. MAINTAIN THIS DOCUMENT IN CONFIDENCE
2. NOT TO REPRODUCE OR COPY IT
3. NOT TO REVEAL OR PUBLISH IT IN WHOLE OR PART