

1

2

3

4

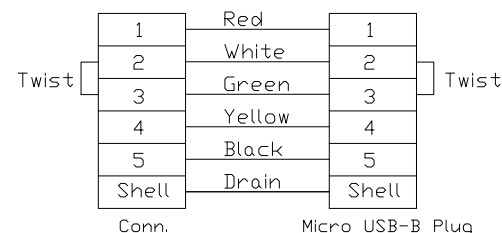


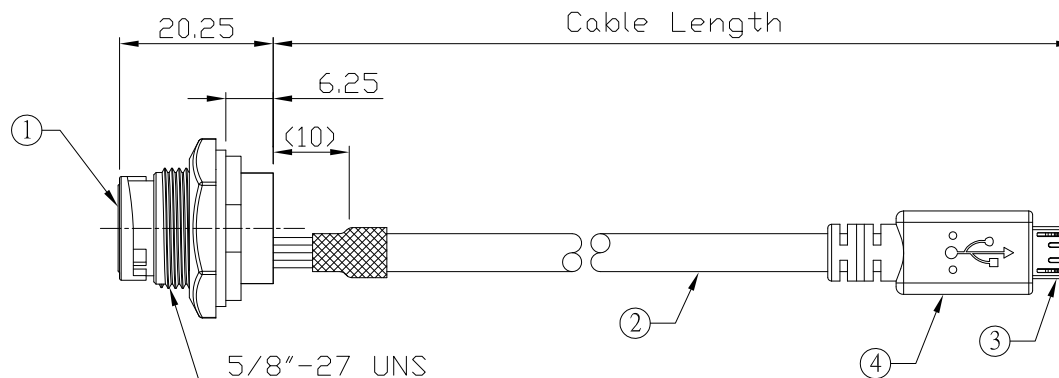
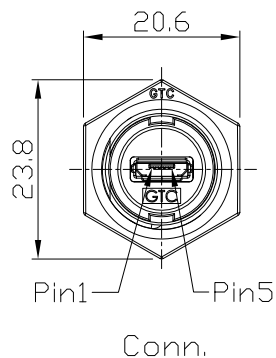
Notes: (Unless Otherwise Specified)

1. Waterproof Rate: IP68.
2. Recommend Panel Thickness : 0.8 to 3.0 mm.
3. Recommend Torque: 9~10 Kgf-cm.
4. Mating Cap P/N: GT1C1210X2.
5. RoHS Compliant.
6. Pack each cable in a poly bag and 25pcs in a poly bag.

RR-11A200-0P-XX_REV:XX_QTY:1PCS

LOT: XXXX
Made in XXXXX

RR-11A200-0P-XX_REV:XX_QTY:25PCS

LOT: XXXX
Made in XXXXX

Wiring Diagram

4	Over Mold	PVC Color: Black	1
3	Micro USB-B Plug	Housing: Thermoplastic, Color: Black Contacts: Copper Alloy, Finish: Au Plated Shell: Copper Alloy, Finish: Ni Plated	1
2	Cable	UL2725 1P*28AWG+3C*24AWG+Al/My+D+B DD=5.0mm, Color: Black	1
1	Mirco USB-AB Plastic C2 Panel	GT Contact P/N: GT11A200-0P-XX	1
Item	Part Name	Material / Finish	Q'ty

RR-11A200-0P-109	2769 mm	+100
RR-11A200-0P-40	1016 mm	+50
RR-11A200-0P-20	508 mm	+50
RR-11A200-0P-10	254 mm	+25
Part No.	Cable Length	Tol.

TITLE Mirco USB-AB Plastic C2 Panel Jack Lock With Micro USB-B Plug						DRAWING NUMBER RR-11A200-0P-XX			REV. 02	
THIRD ANGLE PROJECTION	SIZE B	SCALE 1:1	DRAW / DATE Lucas 07/23/14	CHECK / DATE Ray 07/23/14	APPROVE / DATE Ray 07/23/14	TOLERANCES X.X ± 0.5 X.XX ± 0.2	ANGLES X.XXX ± 0.05 X.X ± 1°	UNIT mm	SHEET 1/1	

