

Notes: (Unless Otherwise Specified)


1. Waterproof Rate: IP68.
2. Recommend Panel Thickness : 0.8 to 3.0 mm.
3. Recommend Torque: 9~10 Kgf-cm.
4. Mating Cap P/N: GT1C1210X2.
5. RoHS Compliant.
6. 產品採用USB 10PCS吸塑盒包裝;並於吸塑盒上蓋貼上標籤.

RR-11C200-10 REV:XX QTY:10PCS



LOT: XXXX

Made in China



7. 標籤上的REV: 請依照成品圖面版本.
8. Type C AB面接點需跟圖面一致.
9. UL Certification file #E364108.



Conn.

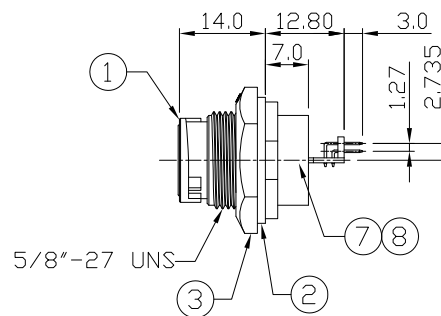

Recommend
Panel Cut-Out

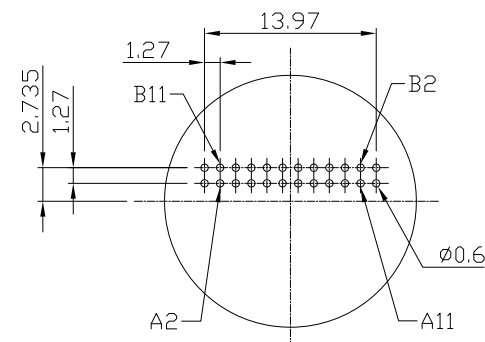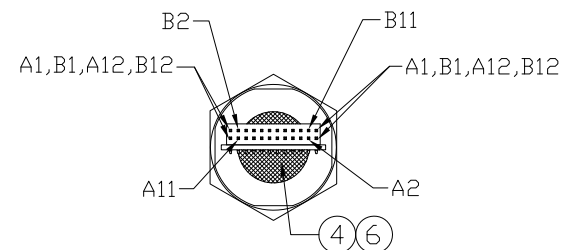

Recommend PCB Layout
(Scale 2/1)

8	Pin Header	Housing: Thermoplastic, Color: Black Contacts: Copper Alloy, Finish: Au Plated	1
7	PCB	FR-4 Color: -	1
6	Glue	Epoxy Color: Black	1
5	USB Type C 3.1	Housing: Thermoplastic, Color: Black Contacts: Copper Alloy, Finish: Au 30u" Plated Shell: Stainless Steel, Finish: Au Plated	
4	Hold	Silicone Color: Black	
3	Hex Nut	Thermoplastic Color: Black	
2	Gasket	Silicone Color: Black	1
1	Housing	Thermoplastic Color: Black	1
Item	Part Name	Material / Finish	Q'ty

TITLE
USB 3.1 Type C Plastic C2 Panel Jack Lock Dip

DRAWING NUMBER	RR-11C200-10
----------------	--------------

REV.
02

THE INFORMATION CONTAINED HEREIN IS PROPRIETARY AND CONFIDENTIAL TO RR BUSINESS VENTURES, LLC. THE POSSESSOR AGREES TO THE FOLLOWING

1. MAINTAIN THIS DOCUMENT IN CONFIDENCE
2. NOT TO REPRODUCE OR COPY IT
3. NOT TO REVEAL OR PUBLISH IT IN WHOLE OR PART