

1

2

3

4



Notes: (Unless Otherwise Specified)

- 1. Waterproof Rate: IP68.
- 2. RoHS Compliant.
- 3. Pack each cable in a poly bag and 25pcs in a poly bag.

RR-15222R-21103-XX_REV:XX_QTY:1PCS
LOT: XXXX
Made in XXXXX

RR-15222R-21103-XX_REV:XX_QTY:25PCS
LOT: XXXX
Made in XXXXX

REV	ECN#	DESCRIPTION OF REVISION	DRAW BY DATE	CHECK BY DATE	APPROVE BY DATE
A0			Jenny 11/09/22	Lucas 11/09/22	Ray 11/09/22

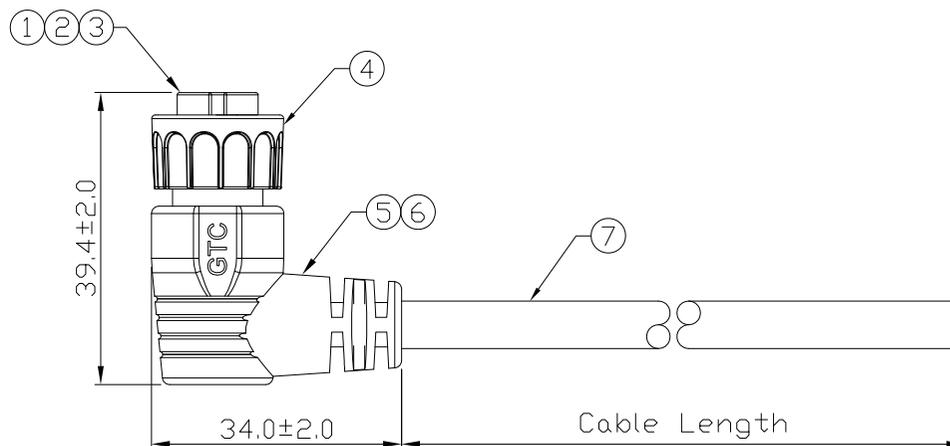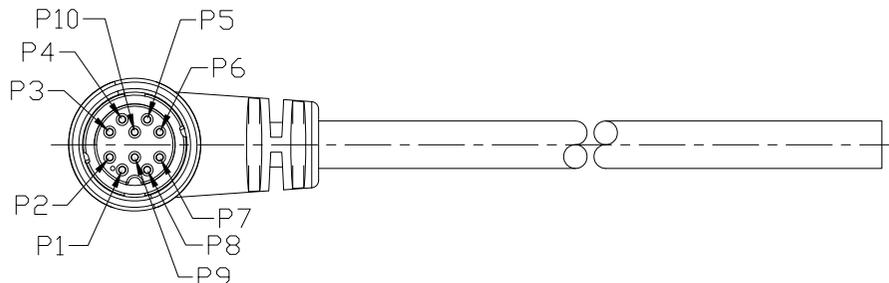

1	Brown
2	Blue
3	White
4	Green
5	Yellow
6	Gray
7	Pink
8	Red
9	Black
10	Orange

Wiring Diagram

Item	Part Name	Material / Finish	Q'ty
7	Cable	UL2464 24AWG*10C+D+Al/My OD=6.5mm, Color:Black	1
6	Over Mold	PVC Color: Black	1
5	Inner Mold	Thermoplastic Color: White or Black	1
4	Lock Nut	Thermoplastic Color: Black	1
3	O-Ring	Silicone Color: Red	1
2	Contacts	Copper Alloy Finish: Au Plated	10
1	Housing	Thermoplastic Color: Black	1

RR-15222R-21103-39	990 mm	+50
Part No.	Cable Length	Tol.

TITLE C2 2A 10P Cable End 90° Female Lock With Cable						DRAWING NUMBER RR-15222R-21103-XX			REV. A0	
	B	1:1	Jenny 11/09/22	Lucas 11/09/22	Ray 11/09/22	X.X ± 0.5 X.XX ± 0.2	X.XXX ± 0.05 ANGLES ± 1°	mm	1/1	
THIRD ANGLE PROJECTION	SIZE	SCALE	DRAW / DATE	CHECK / DATE	APPROVE / DATE	TOLERANCES		UNIT	SHEET	

USB FIREWIRE.com
THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY INFORMATION OF RR BUSINESS VENTURES, LLC. THE POSSESSOR AGREES TO THE FOLLOWING
 1. MAINTAIN THIS DOCUMENT IN CONFIDENCE
 2. NOT TO REPRODUCE OR COPY IT
 3. NOT TO REVEAL OR PUBLISH IT IN WHOLE OR IN PART
 COPYRIGHT © 2019

1

2

3

4