

1

2

3

4

Notes: (Unless Otherwise Specified)

1. Waterproof Rate: IP67.
2. Recommend Cover Torque: 6~7 Kgf-cm.
3. Recommend Gland Nut Torque: 9~10 Kgf-cm.
4. Cable Diameter: 5.0mm To 6.0mm.
5. RoHS Compliant.
6. Pack Each Cable In A Poly Bag And 25pcs In A Poly Bag.


RR-152264-21100_REV:XX_QTY:1PCS

LOT: XXXX
Made in XXXXX


RR-152264-21100_REV:XX_QTY:25PCS

LOT: XXXX
Made in XXXXX


REV	ECN#	DESCRIPTION OF REVISION	DRAW BY DATE	CHECK BY DATE	APPROVE BY DATE
01			Aileen 08/26/21	Lucas 08/26/21	Ray 08/26/21

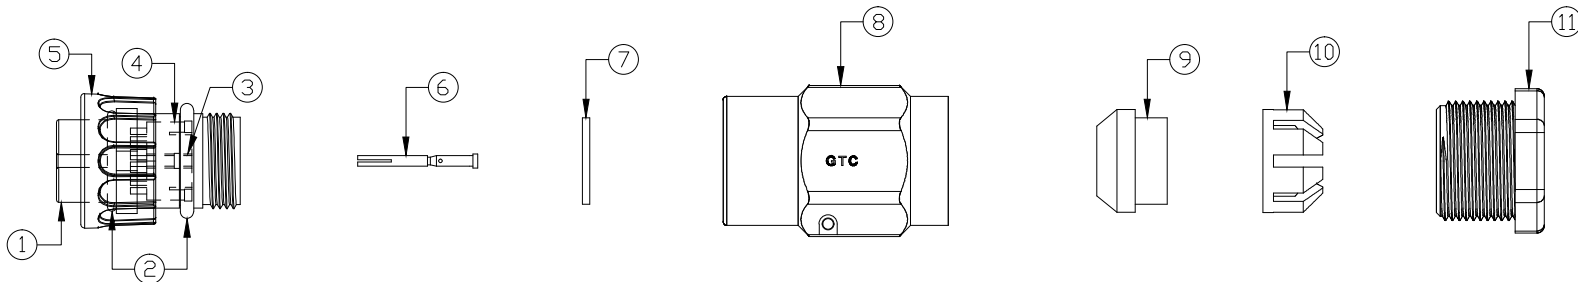

11	Gland Nut	Thermoplastic Color: Black	1
10	Cage	Thermoplastic Color: White	1
9	Gland	Silicone Color: Green	1
8	Cover	Thermoplastic Color: Black	1
7	Gasket	Silicone Color: Black	1
6	Contacts	Copper Alloy, GTC P/N:RR-52C02-22010 Finish: Au Plated	10
5	Lock Nut	Thermoplastic Color: Black	1
4	Base	Thermoplastic Color: Black	1
3	Gland Pin	Thermoplastic Color: Black	2
2	O-Ring	Silicone Color: Red	2
1	Housing	Thermoplastic Color: Black	1
Item	Part Name	Material / Finish	Q'TY



Pin Assignment

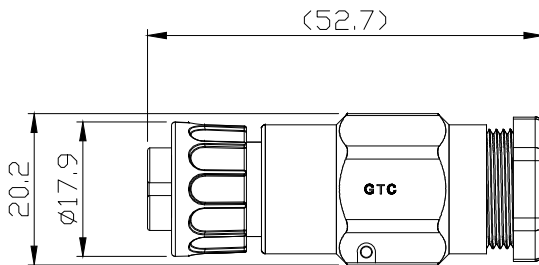

TITLE C2 2A 10P Field Installable Cable End Female Crimp Lock				DRAWING NUMBER RR-152264-21100				REV. 01	
	B	1:1	Aileen 08/26/21	Lucas 08/26/21	Ray 08/26/21	X.X ± 0.5 X.XX ± 0.2	X.XXX ± 0.05 ANGLES ± 1°	mm	1/1
THIRD ANGLE PROJECTION	SIZE	SCALE	DRAW / DATE	CHECK / DATE	APPROVE / DATE	TOLERANCES		UNIT	SHEET



THE INFORMATION CONTAINED HEREIN IS PROPRIETARY AND CONFIDENTIAL TO RR BUSINESS VENTURES, LLC. THE POSSESSOR AGREES TO THE FOLLOWING
1. MAINTAIN THIS DOCUMENT IN CONFIDENCE
2. NOT TO REPRODUCE OR COPY IT
3. NOT TO REVEAL OR PUBLISH IT IN WHOLE OR PART

1

2

3

4