

Notes: (Unless Otherwise Specified)








- 1. Waterproof Rate: IP68.
- 2. Suitable Cable  $\varnothing$ D=5.0mm To 6.0mm.
- 3. Recommend Cover Torque: 6~7 Kgf-cm.
- 4. Recommend Gland Nut Torque: 9~10 Kgf-cm.
- 5. RoHS Compliant.
- 6. 產品採用無Logo PE袋單PCS包裝,並將標籤貼於袋外.

RR-153264-23030\_REV:XX\_QTY:1PCS  
LOT: XXXX  
Made in China


- 7. 每25PCS產品再用無Logo PE袋包裝,並將標籤貼於袋外.

RR-153264-23030\_REV:XX\_QTY:25PCS  
LOT: XXXX  
Made in China


- 8. 標籤上的REV: 請依照成品圖面版本.
- 9. 不可使用夾鍊袋



|      |           |                                   |      |
|------|-----------|-----------------------------------|------|
| 12   | Gland Pin | Thermoplastic<br>Color: Black     | 2    |
| 11   | Base      | Thermoplastic<br>Color: Black     | 1    |
| 10   | O-Ring    | Silicone<br>Color: Red            | 1    |
| 9    | Gland Nut | Thermoplastic<br>Color: Black     | 1    |
| 8    | Cage      | Thermoplastic<br>Color: White     | 1    |
| 7    | Gland     | Silicone<br>Color: Green          | 1    |
| 6    | Cover     | Thermoplastic<br>Color: Black     | 1    |
| 5    | Gasket    | Silicone<br>Color: Black          | 1    |
| 4    | Contacts  | Copper Alloy<br>Finish: Au Plated | 3    |
| 3    | Lock Nut  | Thermoplastic<br>Color: Black     | 1    |
| 2    | O-Ring    | Silicone<br>Color: Red            | 1    |
| 1    | Housing   | Thermoplastic<br>Color: Black     | 1    |
| Item | Part Name | Material / Finish                 | Q'ty |



Pin Assignment

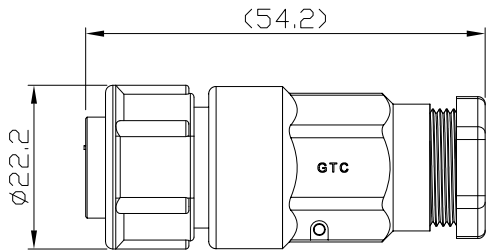

|                                                                  |      |       |                |                |                |                                   |                             |            |       |
|------------------------------------------------------------------|------|-------|----------------|----------------|----------------|-----------------------------------|-----------------------------|------------|-------|
| TITLE<br>C3 10A 3P Field Installable Cable End Female Crimp Lock |      |       |                |                |                | DRAWING NUMBER<br>RR-153264-23030 |                             | REV.<br>A0 |       |
|                                                                  | B    | 1:1   | Joyce 10/14/15 | Lucas 10/14/15 | Ray 10/14/15   | X.X ± 0.5<br>X.XX ± 0.2           | X.XXX ± 0.05<br>ANGLES ± 1° | mm         | 1/1   |
| THIRD ANGLE PROJECTION                                           | SIZE | SCALE | DRAW / DATE    | CHECK / DATE   | APPROVE / DATE | TOLERANCES                        |                             | UNIT       | SHEET |



USB FIREWIRE.com

THE INFORMATION CONTAINED HEREIN IS PROPRIETARY AND CONFIDENTIAL TO RR BUSINESS VENTURES, LLC. THE POSSESSOR AGREES TO THE FOLLOWING  
1. MAINTAIN THIS DOCUMENT IN CONFIDENCE  
2. NOT TO REPRODUCE OR COPY IT  
3. NOT TO REVEAL OR PUBLISH IT IN WHOLE OR PART