

Notes: (Unless Otherwise Specified)



1. Waterproof Rate: IP68.
2. Recommend Cable Diameter: 5.0 to 6.0 mm
3. Recommend Cover Torque: 6.0 to 7.0 Kg-cm.
4. Recommend Gland Nut Torque: 9.0 to 10.0 Kg-cm.
5. RoHS Compliant.
6. 產品採用無Logo PE袋單PCS包裝,並將標籤貼於袋外

RR-153294-23040_REV:XX_QTY:1PCS
LOT: XXXX
Made in China


7. 每25PCS產品再用無Logo PE袋包裝,並將標籤貼於袋外

RR-153294-23040_REV:XX_QTY:25PCS
LOT: XXXX
Made in China

8. 標籤上的REV: 請依照成品圖面版本.
9. 不可使用夾鍊袋

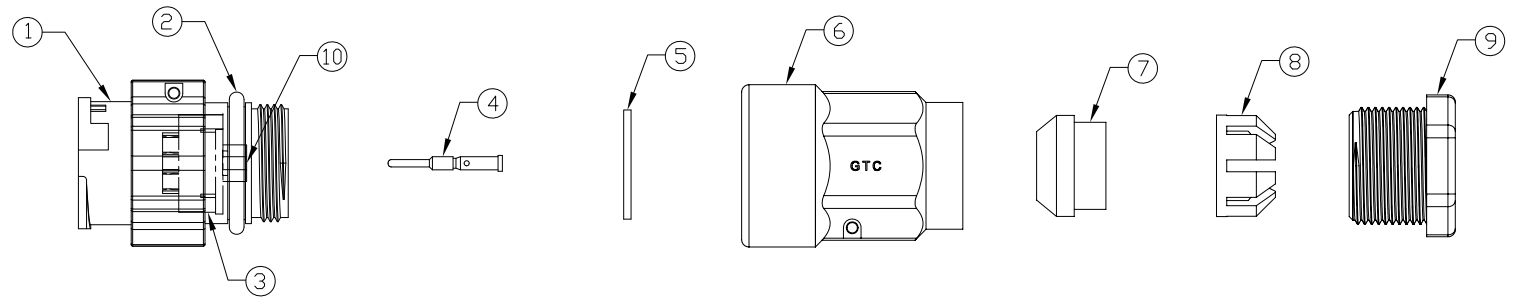

Pin Assignment

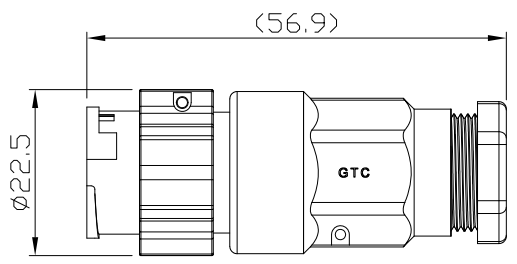

GTC
 DOC.CENTER.ISSUE
 AUG.25.2016
 ONLY FOR
 RELEASE

10	Gland Pin	Thermoplastic Color: Black	1
9	Gland Nut	Thermoplastic Color: Black	1
8	Cage	Thermoplastic Color: White	1
7	Gland	Silicone Color: Green	1
6	Cover	Thermoplastic Color: Black	1
5	Gasket	Silicone Color: Black	1
4	Contacts	Copper Alloy Finish: Au Plated	4
3	Base	Thermoplastic Color: Black	1
2	O-Ring	Silicone Color: Red	1
1	Housing	Thermoplastic Color: Black	1
Item	Part Name	Material / Finish	Qty

TITLE C3 10A 4P Field Installable Cable To Cable Male Crimp Lock						DRAWING NUMBER RR-153294-23040			REV. A0	
 THIRD ANGLE PROJECTION		SIZE B	SCALE 1:1	DRAW / DATE Joyce 08/24/16	CHECK / DATE Lucas 08/24/16	APPROVE / DATE Ray 08/24/16	TOLERANCES X.X ± 0.5 X.XXX ± 0.05 X.XX ± 0.2 ANGLES ± 1°		UNIT mm	SHEET 1/1

USB FIREWIRE.com
 THE INFORMATION CONTAINED HEREIN IS PROPRIETARY AND CONFIDENTIAL TO RR BUSINESS VENTURES, LLC. THE POSSESSOR AGREES TO THE FOLLOWING
 1. MAINTAIN THIS DOCUMENT IN CONFIDENCE
 2. NOT TO REPRODUCE OR COPY IT
 3. NOT TO REVEAL OR PUBLISH IT IN WHOLE OR PART