

Notes: (Unless Otherwise Specified)




1. Waterproof Rate: IP68.
2. Recommend Panel Thickness: 0.8 to 8.0 mm.
3. Recommend Torque: 19~20 Kgf-cm.
4. Mating Cap P/N: GT1C5231X2/GT2C1230X2.
5. RoHS Compliant.
6. 產品採用無Logo PE袋單PCS包裝,並將標籤貼於袋外.

RR-214300-03-XX_REV:XX_QTY:1PCS
LOT: XXXX
Made in China

7. 每25PCS產品再用無Logo PE袋包裝,並將標籤貼於袋外.

RR-214300-03-XX_REV:XX_QTY:25PCS
LOT: XXXX
Made in China

8. 標籤上的REV: 請依照成品圖面版本.
9. 不可使用夾鍊袋.

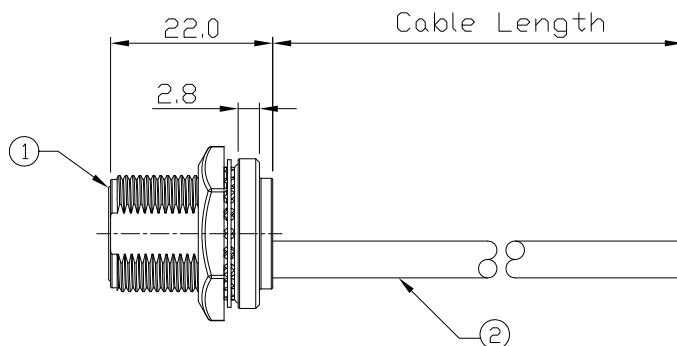

Front View
Recommend
Panel Cut-Out

1	Red
2	White
3	Green
4	Yellow
5	Black
Shell	Drain

Wiring Diagram

GTC
DOC.CENTER.ISSUE
DEC.27.2014
ONLY FOR
RELEASE

RR-214300-03-12	304.8 mm	±20
RR-214300-03-08	203.2 mm	±10
RR-214300-03-Z3	300 mm	±10
Part No.	Cable Length	Tol.

2	Cable	UL2725 1P*28AWG+3C*24AWG+Al/My+D+B Color: Black, OD=5.0mm	1
1	Mini USB-B Metal C2 Panel Jack Screw With Cable	GTC Connector P/N: GT214300-03-XX	1
Item	Part Name	Material / Finish	Q'ty

TITLE Mini USB-B Metal C2 Panel Jack Screw With Cable						DRAWING NUMBER RR-214300-03-XX			REV. A1	
THIRD ANGLE PROJECTION	SIZE	SCALE	DRAW / DATE	CHECK / DATE	APPROVE / DATE	TOLERANCES	UNIT	SHEET		
DO NOT SCALE DRAWINGS	B	1:1	Joyce 04/29/14	Lucas 04/29/14	Ray 04/29/14	X.X ± 0.5 X.XX ± 0.2	mm	1/1		
						X.XXX ± 0.05 ANGLES ± 1°				

USB FIREWIRE.com
NOTICE OF PROPRIETARY PROPERTY:
THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY
PROPERTY OF GT Contact CO.,LTD THE POSSESSOR AGREES
TO THE FOLLOWING:
(i) TO MAINTAIN THIS DOCUMENT IN CONFIDENCE
(ii) NOT TO REPRODUCE OR COPY IT
(iii) NOT TO REVEAL OR PUBLISH IT IN WHOLE OR PART
(iv) ALL RIGHTS RESERVED