

Notes: (Unless Otherwise Specified)


- 1. Waterproof Rate: IP68.
- 2. RoHS Compliant.
- 3. 產品採用無Logo 防水袋包裝 並將標籤貼於袋外

RR-218320-02-40_REV001_QTY1PCS
LOT: XXXX
 Made in China

- 4. 每25PCS產品再用防水袋包裝 並將標籤貼於袋外

RR-218320-02-40_REV001_QTY25PCS
LOT: XXXX
 Made in China

- 5. 標籤上的REV: 請依照成品圖面版本.
- 6. 不可使用夾鍊袋

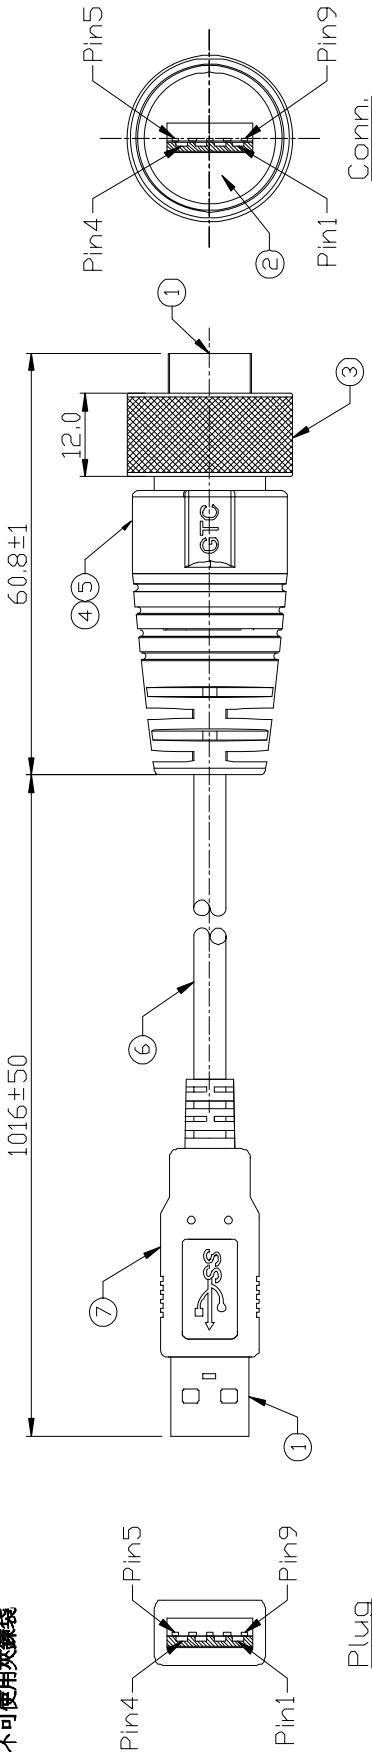

Plug

1	Red	1	Red
2	White	2	White
3	Green	3	Green
4	Black	4	Black
8	Blue	5	Blue
9	Yellow	6	Yellow
7	Drain	7	Drain
5	Purple	8	Purple
6	Orange	9	Orange
Shell	Braid	Shell	Shell

Plug Conn.

Wiring Diagram

7	Over Mold	PVC	Color: Black	1
6	Cable	UL2725 (1P*28AWGEM)*2+(1PR*28AWG)+2C*22AWG+AB 85Z	Color: Black, ID=5.5mm	1
5	Over Mold	PVC	Color: Black	1
4	Inner Mold	Thermoplastic	Color: Black	1
3	Metal Screw Nut	Copper Alloy	Finish: Ni Plated	1
2	Rubber Pad	Silicone	Color: Black	1
1	USB-A 3.0 Plug	Housing: Thermoplastic, Color: Blue	Contacts: Copper Alloy, Finish: Au Plated	2
		Shell: Cold Roll Steel, Finish: Ni Plated	Material / Finish	0'ty

TITLE USB-A 3.0 Metal C3 Cable End Plug Screw With 40 Inches Cable
 + USB-A 3.0 Plug

DRAWING NUMBER RR-218320-02-40
 REV. 01

DD NOT SCALE DRAWINGS	B	1:1	Karen 12/04/15	Lucas 12/04/15	Roy 12/04/15	XX ± 0.2	XXX ± 0.05	MIN	1/1
THIRD ANGLE PROJECTION	SIZE	SCALE	DRAW / DATE	CHECK / DATE	APPROVE / DATE	TOLERANCES	ANGLES	UNIT	SHEET

www.USBFireWire.com

NOTICE OF PROPRIETARY PROPERTY:
 THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF USBFIREWIRE.COM THE POSSESSOR AGREES TO MAINTAIN THIS DOCUMENT IN CONFIDENCE AND NOT TO REPRODUCE OR COPY IT, IN WHOLE OR PART, WITHOUT PERMISSION OR POLISH IT IN WHOLE OR PART. ALL RIGHTS RESERVED.

GTC
 R&D DEPT. ISSUE
 DEC.07.2015
 ONLY FOR
 RELEASE