

Notes: (Unless Otherwise Specified)



- 1. Waterproof Rate: IP68.
- 2. RoHS Compliant.
- 3. 產品採用無Logo PE袋單PCS包裝,並將標籤貼於袋外.

RR-218320-03-XX_REV:XX_QTY:1PCS
LOT: XXXX
Made in China


- 4. 每25PCS產品再用防水袋包裝,並將標籤貼於袋外.

RR-218320-03-XX_REV:XX_QTY:25PCS
LOT: XXXX
Made in China

- 5. 標籤上的REV: 請依照成品圖面版本.
- 6. 不可使用夾鍊袋

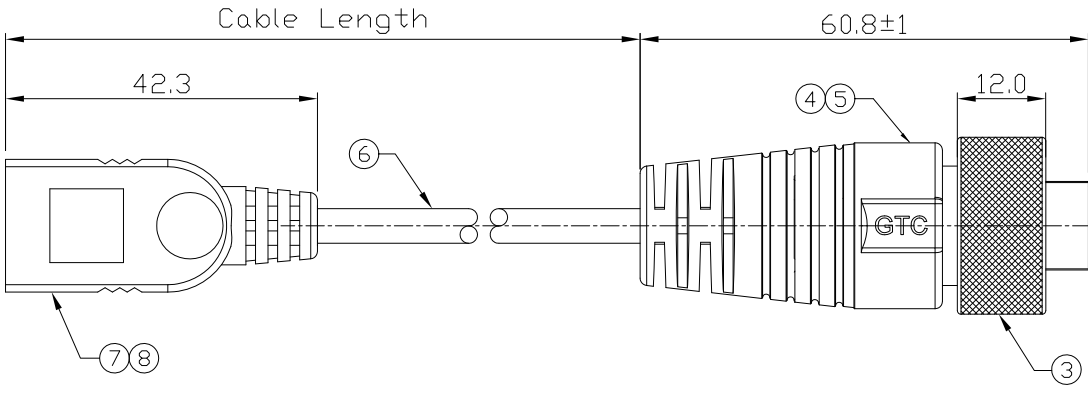

GTC
R&D DEPT. ISSUE
DEC.07.2015
ONLY FOR
RELEASE



8	USB-A 3.0 Receptacle	Housing: Thermoplastic, Color: Blue Contacts: Copper Alloy, Finish: Au Plated Shell: SPCC, Finish: Au Plated	1
7	Over Mold	PVC Color: Black	1
6	Cable	UL2725 (1P*28AWG+EAM)*2+(1PR*28AWG+A)+2C*22AWG+AB 85% Color: Black, OD=5.5mm	1
5	Over Mold	PVC Color: Black	1
4	Inner Mold	Thermoplastic Color: Black	1
3	Metal Screw Nut	Copper Alloy Finish: Ni Plated	1
2	Rubber Pad	Silicone Color: Black	1
1	USB-A 3.0 Plug	Housing: Thermoplastic, Color: Blue Contacts: Copper Alloy, Finish: Au Plated Shell: Cold Roll Steel, Finish: Ni Plated	1
Item	Part Name	Material / Finish	Q'ty

1	Red	1
2	White	2
3	Green	3
4	Black	4
5	Blue	5
6	Yellow	6
7	Drain	7
8	Purple	8
9	Orange	9
Shell	Braid	Shell
Plug		Conn.

Wiring Diagram

RR-218320-03-120	3048 mm	±150
RR-218320-03-78	1981 mm	±100
RR-218320-03-40	1016 mm	±50
Part No.	Cable Length	Tol.

TITLE USB-A 3.0 Metal C3 Cable End Plug Screw With USB-A 3.0 Receptacle						DRAWING NUMBER RR-218320-03-XX			REV. 01	
THIRD ANGLE PROJECTION	SIZE B	SCALE 1:1	DRAW / DATE Karen 12/04/15	CHECK / DATE Lucas 12/04/15	APPROVE / DATE Ray 12/04/15	TOLERANCES X.X ± 0.5 X.XX ± 0.2	ANGLES X.XXX ± 0.05 ± 1°	UNIT mm	SHEET 1/1	

USB FIREWIRE .com
NOTICE OF PROPRIETARY PROPERTY:
THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF GT CONTACT CO., LTD. THE POSSESSOR AGREES TO THE FOLLOWING:
(i) TO MAINTAIN THIS DOCUMENT IN CONFIDENCE
(ii) NOT TO REPRODUCE OR COPY IT
(iii) NOT TO REVEAL OR PUBLISH IT IN WHOLE OR PART
(iv) ALL RIGHTS RESERVED