


RoHS COMPLIANT

H		2012.05.04	N21205022	DESCRIPTION CONTROL			
I		2012.08.20	N21208077	REV	DESC	DATE	ECN NO.
				G		2012.03.22	N21203138




L±T

P1 New Braid Ass'y Way

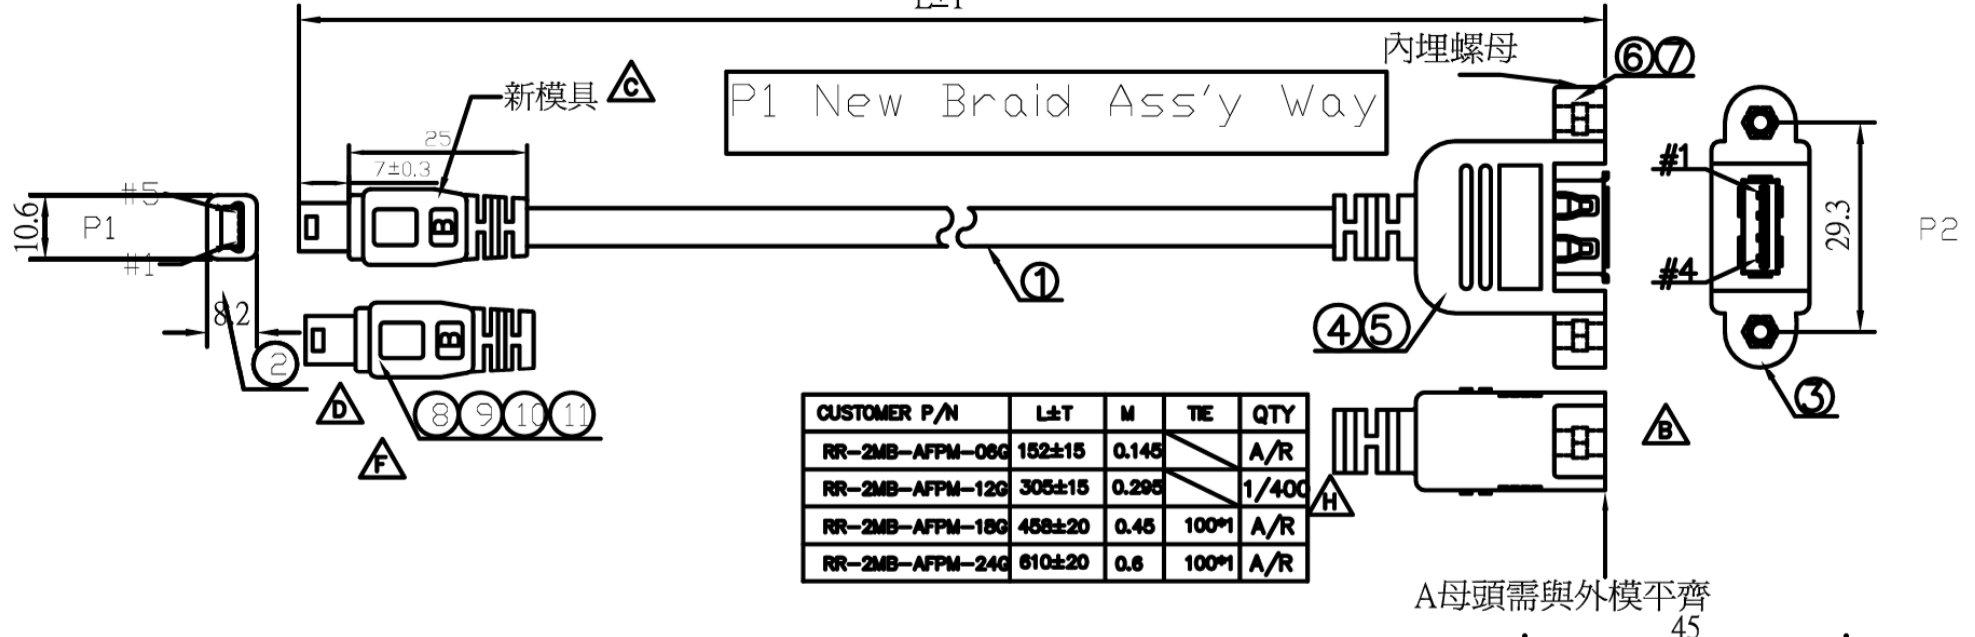

CUSTOMER P/N	L±T	M	TE	QTY
RR-2MB-AFPM-08G	152±15	0.145		A/R
RR-2MB-AFPM-12G	305±15	0.295		1/400
RR-2MB-AFPM-18G	458±20	0.45	100*1	A/R
RR-2MB-AFPM-24G	610±20	0.6	100*1	A/R

*	390	PE BAG: 2"×3"×0.08MM (附2PCS螺絲)	1	PCS
*	390	LABEL: "RR-2MB-AFPM-XXG" 45*15MM	1	PCS
*	390	CARTON: 46*30*25CM	A/R	PCS
*	390	PE BAG: 30"×28"×0.08MM	A/R	PCS
*	390	PE BAG: 5"×6"×0.08MM	1	PCS
11	21001000328	FOIL-CU-8MM	28*1	MM
10	370	PVC-BK10/50P	3.0	G
9	200034000207	TUBE-HT-#1.0MM (薄型)	5*3	MM
8	210030000057	HI TEAMP TAPE: W: 6MM	20*1	MM
7	240010700138	SRW: 5.4*9.8<全牙 4#-40UNC>	2	PCS
6	240020000008	NUTS: 4.75*2.0MM<4-40UNC>	2	PCS
5	370	PE-5321	5.0	G
4	370	PVC-BK10/30P	8.0	G
3	110082304028	USB-A-S<WH><鐵殼鍍金>	1	PCS
2	370	MINI-USB-B-P-5PIN<BK><超薄><鐵殼鍍金>	1	SET
1	1303041100003	UL2725,(1P+2C)+AB,BK10,OD: 4.8 (28/24)<REV: 2.0>	L	M
NO	TYPE	DESCRIPTION	QTY	UNIT

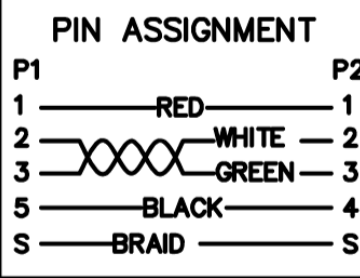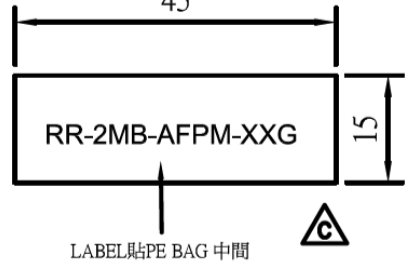

INNER MOLDING		USB.A051
OUTER MOLDING	USB.A389KF	USB.A327KF
www.USBFireWire.com		
	ITEM: RR-2MB-AFPM-XXG	REV
DRAW, BY: 劉坤	SCALE: NONE	DATE: 2009-08-03
CHECK, BY:	CUSTOMER: C331 (陸鴻)	PAGE: 1/1
APP, BY:	CUSTOMER P/N:	
ALL DIMENSIONS IN mm		