



CHANGE VERSION	REMARKS	C	14/04/14	CFM P/N, PIN OUT, WIRE
A	14/03/20	D		
B	14/03/31	E		


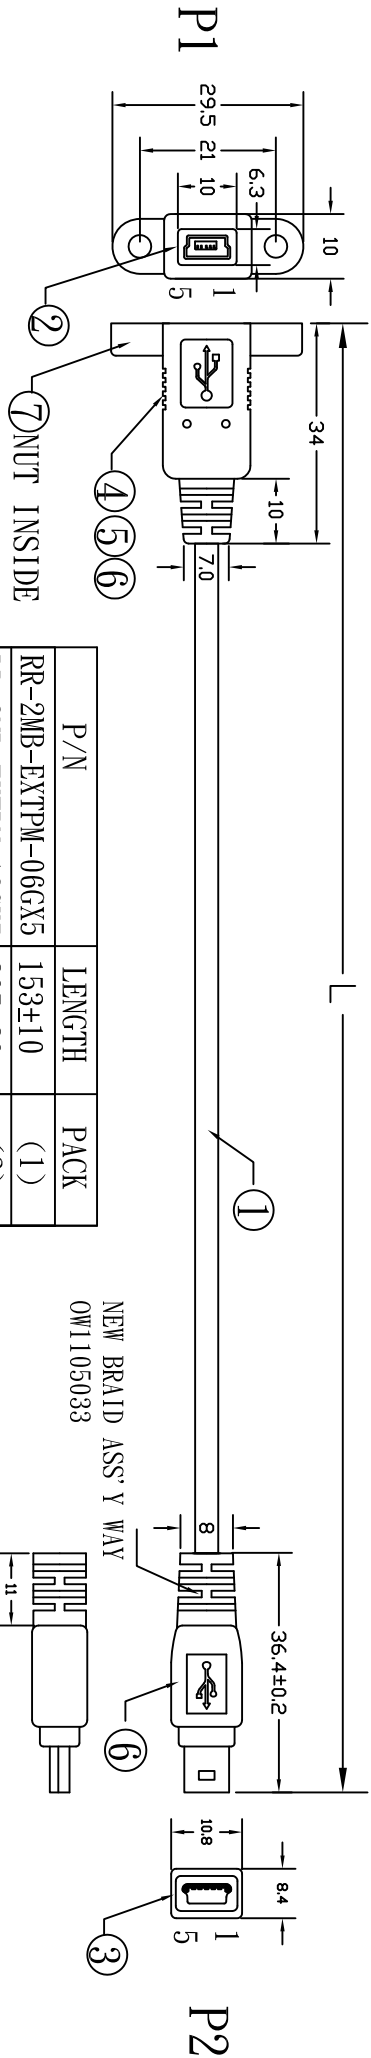


P/N	LENGTH	PACK
RR-2MB-EXTPM-06GX5	153±10	(1)
RR-2MB-EXTPM-12GX5	305±20	(2)
RR-2MB-EXTPM-18GX5	457±20	(3)



NEW BRAID ASS'Y WAY
OW1105033

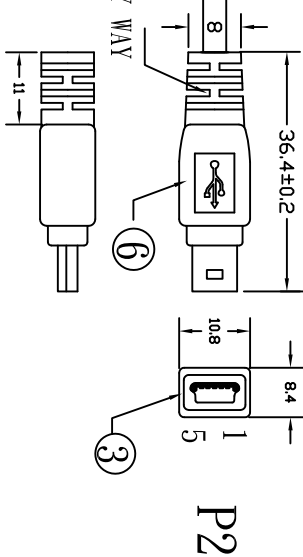

PIN OUT :

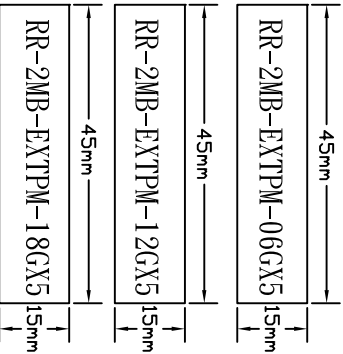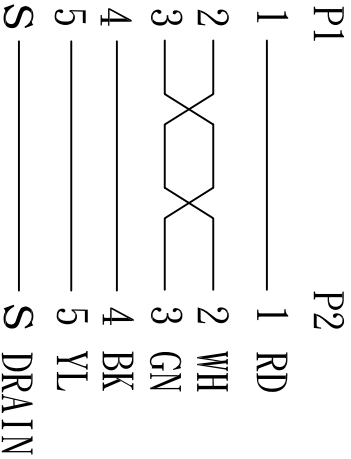

P/N STICKER

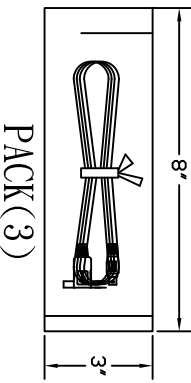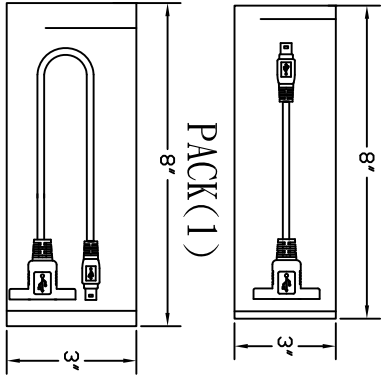

MATERIAL LIST :

NO.	P/NAME	DESCRIPTION	Q' TY
1	WIRE	UL2725 30AWG(7/0.10 TC)*1P+30AWG(7/0.10 TC)*3C+AL+B(16*3/0.10 TC) OD:3.0±0.15 BLACK(B792) (COPARTNER)	1
2	PLUG	MINI USB" B" TYPE 5P FEMALE GOLD PLATED	1
3	PLUG	MINI USB" B" TYPE 5PIN MALE GOLD PLATED	1
4	PVC	LD PE	3g
5	PVC	35P BLACK(B792)PVC	1.5g
6	PVC	45P BLACK(B792)PVC	20g
7	NUT	#4-40 NUT	2
8	SCREW	#4-40 5.3*10mm + TYPE	2
9	PACKAGE	IPCE/PE BAG:06*3" *8" + P/N STICKER (2PCS 5.3*10mm+ TYPE SCREW IN 2.5*5CM PE BAG)	

MOLD TOOL NO.		DATE	
MINI USB EXTPM NEW TOOLING		14/04/14	
HOOD G160-037-001		CUSTOMER P/N	
MINI USB 5P M A110-536-001		APPROVED BY	
 USBFIREWIRE.com		 SCALE UNIT REV MM C	
THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY INFORMATION OF RR BUSINESS VENTURES, LLC. THE POSSESSOR AGREES TO MAINTAIN THIS DOCUMENT IN CONFIDENCE; NOT REPRODUCE IT OR COPY IT, AND NOT TO REVEAL OR PUBLISH IT IN WHOLE OR PART. COPYRIGHT © 2019		CHECKED BY Marcos	
ROHS		CONFIRMED BY	