
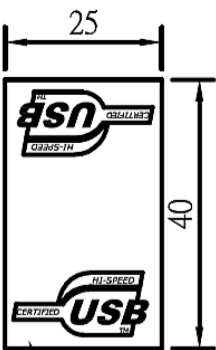


DESCRIPTION CONTROL			
REV	DESC	DATE	APP
B	▲	2010.08.17	

PLASTIC TONGUE (BLACK SHADED AREA)

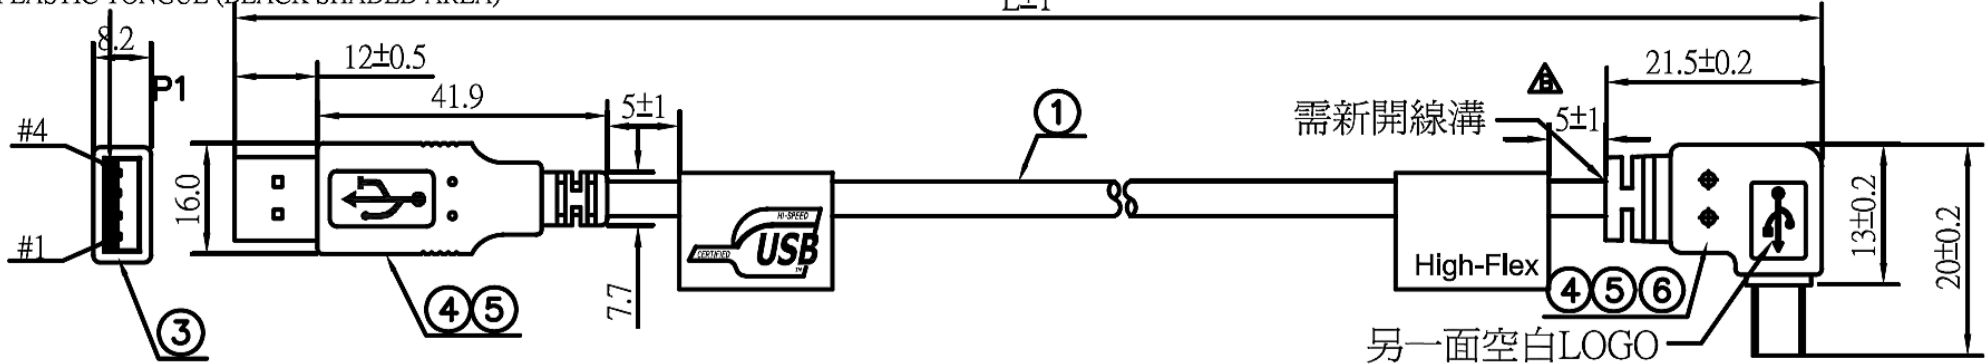


LABEL貼線材


CUSTOMER P/N	L±T	M	PE BAG: L*W*0.06MM	TIE-A/BK10
RR-2MBL01-18GLHF	457±20	0.467	PE BAG: 5*6*0.06MM	80*1
RR-2MBL01-36GLHF	914±30	0.924	PE BAG: 5*6*0.06MM	100*1
RR-2MBL01-78GLHF	1981±30	1.991	PE BAG: 5*6*0.06MM	100*1
RR-2MBL01-180GLHF	4572±30	4.582	PE BAG: 7*10*0.06MM	PE FLJM

RoHS COMPLIANT


* 390	LABEL: 40*25MM*High-Flex	橙底黑字<兩防水	1	PCS
* 330010010325	LABEL: 40*25MM*USB	(PVC材質)<貼線材>	1	PCS
*	LABEL: 45*15MM	<白底黑字>	1	PCS
* 3100000001	CARTON: 48*30*25CM		A/R	PCS
* 30001000000	PE BAG: 30*28*0.08MM		A/R	PCS
* 390	PE BAG: L*W*0.06MM		1	PCS
* 220030000363	TIE-A/BK10		***	MM
6	21003000005	HI TEAMP TAPE: W: 6MM;	20*2	MM
5	12001000003	PVC-BK10/50	13.0	G
4	23002000000	SOL-WIRE-FULL-TIN-1.0	0.2	G
3	180-041033	USB-A-P<WH>/L <鐵殼鍍金>	1	SET
2	110081004126	MINI-USB-B-P-5PIN(BK) <鐵殼鍍金>	1	SET
1	新規格	High-Flex Cables (OD: 4.5)<客供>	L	M
NO	PART NO.	DESCRIPTION	QTY	UNIT

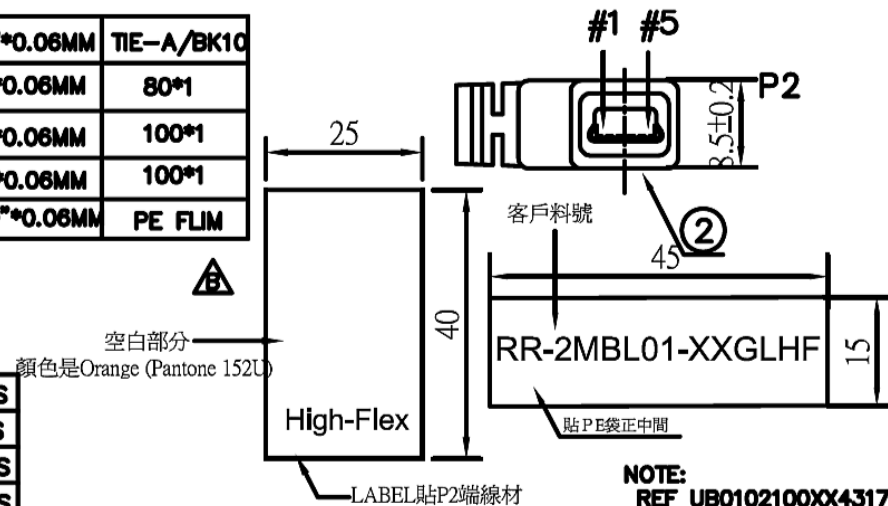

PIN ASSIGNMENT

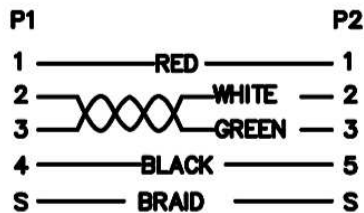

www.USBFireWire.com



ITEM: UB0102100X04904	REV B
DRAW, BY: Fu Dan Xia	SCALE: NONE
CHECK, BY:	DATE: 2010/06/22
APP, BY:	CUSTOMER: C331<陸鴻>
	CUSTOMER P/N: RR-2MBL01-XXGLHF
ALL DIMENSIONS IN mm	