



P1端指定用30P料 P2端用50P料

REV	DESC	DATE	ECN NO
D		09.11.04	N20911028

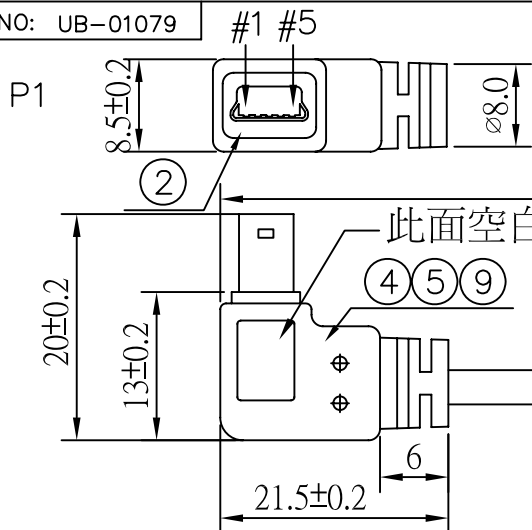


<注意P1端插頭成型後不能有搖動或晃動現象,需特別檢驗留意;>
 <P1端內模指定用PVC料,外模指定用PVC 30P料>

NOTE:
 MINI USB 5P內外模都要用PVC料
 成型,插頭外露仍然要保持7mm

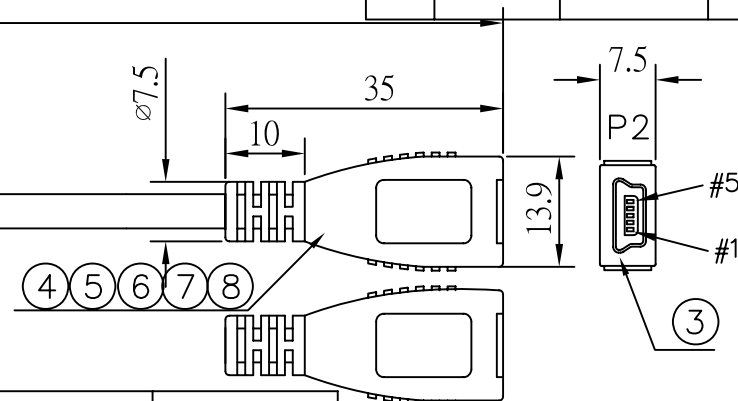

CUSTOMER P/N	Y-S P/N	L±T	M	PE BAG: L"*W"*0.06MM	TIE-A/BK10
RR-2MBR01-EXT-20GL5	UB2002023L01079	510±20	0.52	PE BAG: 5"*6"*0.06MM	80*1
RR-2MBR01-EXT-06GL5	UB2002023L11079	152±20	0.162	PE BAG: 5"*6"*0.06MM	
RR-2MBR01-EXT-14GL5	UB2002023L21079	355±20	0.365	PE BAG: 5"*6"*0.06MM	100*1
RR-2MBR01-EXT-72GL5	UB2002023L31079	1830±30	1.84	PE BAG: 6"*8"*0.06MM	120*1
RR-2MBR01-EXT-180GL5	UB2002023L41079	4572±50	4.58	PE BAG: 6"*8"*0.06MM	130*1

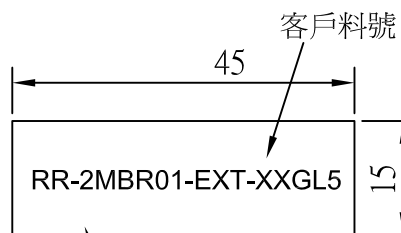

LABEL貼PE袋中間

*	390	LABEL: 45*15MM"RR-2MBR01-EXT-XXGL5"	1	PCS
*	390	CARTON: 46*30*25CM	A/R	PCS
*	390	PE BAG: 30"*28"*0.08MM	A/R	PCS
*	390	PE BAG: L"*W"*0.06MM	1	PCS
*	220030000363	TIE-A/BK	***	MM
9	120010000116	PVC-BK10/30	4.5	G
8	120060000005	ABS膠料 <黑色>	2.0	G
7	120020000001	PE-5321	3.0	G
6	120010000031	PVC-BK10/50	4.5	G
5	200032000155	TUBE-HT-Ø1.0	6*5.0	MM
4	210030000057	HI TEAMP TAPE: W: 6MM	20*2	MM
3	110082004034	MINI-USB-B-S-5PIN(BK) <鐵殼鍍金>	1	PCS
2	110081004129	MINI-USB-B-5PIN<BK> <鐵殼鍍金> <滿PIN> <短型一件式>	1	PCS
1	1303051100033	UL2725,28#*1P+24#*3C+AB,BK10,OD: 4.8MM	L	M
NO	PART NO.	DESCRIPTION	QTY	UNIT

NOTE:

P1端內模料指定用PVC料成型;
 外模指定用30P料成型;

NOTE:
 REFUB0102100X04316

RoHS COMPLIANT

PIN ASSIGNMENT

P1	P2
1 ——— RED ———	1
2 ——— WHITE ———	2
3 ——— GREEN ———	3
4 ——— BLACK ———	4
5 ——— YELLOW ———	5
S ——— BRAID ———	S

INNER MOLDING	A359KF	USB-A073	
OUTER MOLDING	A360KF	USB-A074	USB-A072



	ITEM: UB2002023LX1079	REV E
DRAWN, BY: 苗云麗	SCALE: NONE	DATE: 2008-09-16
CHECKED, BY:	CUSTOMER: C331陸鴻	PAGE: 1/1
APP'ED, BY:	CUSTOMER P/N: RR-2MBR01-EXT-XXGL5	
ALL DIMENSIONS IN mm		