


ROHS COMPLIANT

DESCRIPTION CONTROL			
REV	DESC	DATE	APP


PLASTIC TONGUE (BLACK SHADED AREA)

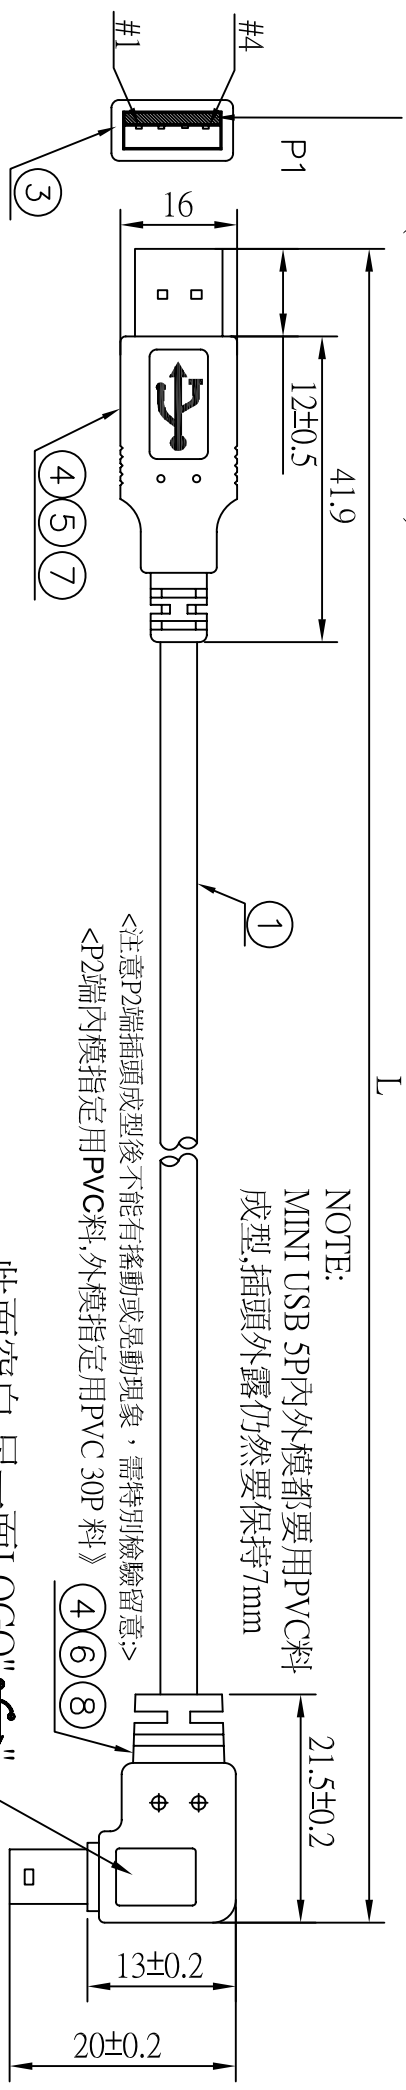

New Braid Ass'y Way

此面空白,另一面LOGO"

CUSTOMER P/N	Y-S P/N	L&T	M	PE BAG: L: *W: *0.06MM	TIE-A/BK10	QTY
RR-2MBR01-06GLX	UB2001021L16058	153±15	0.15	PE BAG: 5" * 6" * 0.06MM	1/800	
RR-2MBR01-12GLX	UB2001021L26058	305±15	0.3	PE BAG: 5" * 6" * 0.06MM		
RR-2MBR01-18GLX	UB2001021L36058	458±20	0.455	PE BAG: 5" * 6" * 0.06MM	100*1	A/R
RR-2MBR01-24GLX	UB2001021L46058	610±20	0.605	PE BAG: 5" * 6" * 0.06MM	100*1	A/R
RR-2MBR01-36GLX	UB2001021L56058	915±30	0.91	PE BAG: 5" * 6" * 0.06MM	1/300	

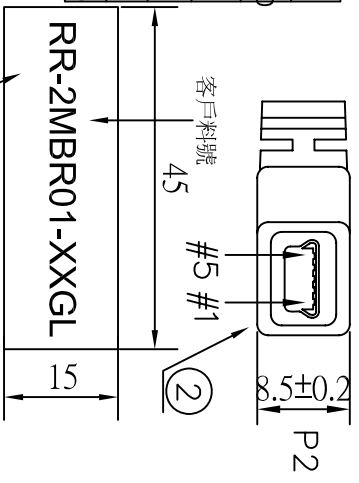


NOTE:

P2端內模料指定用PVC料成型; 外模指定用30P料成型; UB2001021LX4316

NO	PART NO.	DESCRIPTION	QTY	UNIT
*	*	LABEL: 4.5*15MM <白底黑字>	1	PCS
*	310000000012	CARTON: 46*30*25CM	A/R	PCS
*	300010000001	PE BAG: 30" * 28" * 0.08MM	A/R	PCS
*	390	PE BAG: L: *W: *0.06MM	1	PCS
*	220030000363	TIE-A/BK10	****	MM
7	210010000328	FOIL-CU-8MM	26*1	MM
6	210030000057	HI TEAMP TAPE: W: 6MM:	20*2	MM
5	120010000031	PVC-BK10/50	6.8	G
4	230020000001	SOL-WIRE-FULL-TIN-1.0	0.2	G
3	180-041033-C	USB-A-P<WH>L <鐵殼鍍金>	1	SET
2	110081004126	MINI-USB-B-P-5PIN(BK) <鐵殼鍍金>	1	SET
1	1303041101293	UL2725,(1P+2C)+AB-BK10,OD:3.0(30/30) <REV:2.0>	L	M

PIN ASSIGNMENT

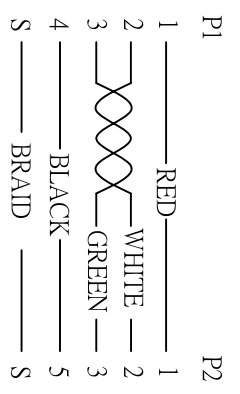

THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY INFORMATION OF RR BUSINESS VENTURES, LLC. THE POSSESSOR AGREES TO MAINTAIN THIS DOCUMENT IN CONFIDENCE, NOT REPRODUCE IT OR COPY IT, AND NOT TO REVEAL OR PUBLISH IT IN WHOLE OR PART. COPYRIGHT © 2019



ITEM: UB2001021LX6058

REV	R
-----	---

SCALE: NONE DATE: 2014.2.18

CUSTOMER: C331<陸鴻>

CUSTOMER P/N:

ALL DIMENSIONS IN mm