


RoHS COMPLIANT

P1端用50P料 P2端指定用30P料

DESCRIPTION CONTROL

REV	DESC	DATE	APP
B		09.11.24	N20911281
C		10.06.07	自然切换
D		11.09.28	N21109139

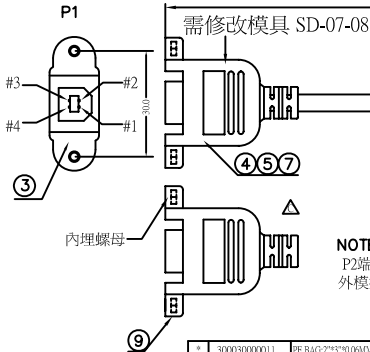

<注意P2端插頭成型後不能有搖動或晃動現象，需特別檢驗留意>

<P2端內模指定用PVC料,外模指定用PVC 30P料>

①

NOTE:

△ MINI USB 5P內外模都要用PVC料
成型,插頭外露仍然要保持7mm

RR-2MBR02BFPM-10GL

LABEL-45*15MM


LABEL-45*15MM*RR-2MBR02BFPM-10GL*

RR-2MBR02BFPM-12GL

LABEL-45*15MM*RR-2MBR02BFPM-12GL*

NOTE: △

P2端內模料指定用PVC料成型;
外模指定用30P料成型;



2PCS六角螺絲裝小PE袋附成品袋中 客戶料號

45

RR-2MBR02BFPM-XXGL

NOTE:

1. REF: UB02023-1112

2. 單PCS包裝, PE袋貼印客戶料號貼紙.

△ 貼PE袋正反面

PIN ASSIGNMENT

P1		P2
1	RED	1
2	WHITE	2
3	GREEN	3
4	BLACK	5
S	BRAID	S

*	300030000011	PE BAG:27*37*0.06MM	1	PCS				
*		LABEL:45*15MM<白底黑字>	1	PCS				
*	310000000012	CARTON:46*30*25CM	A/R	PCS				
*	300010000001	PE BAG:30*28*0.08MM	A/R	PCS				
*	300030000193	PE BAG:57*66*0.06MM	1	PCS				
10	120010000116	PVC-BK10/30	6.2	G				
9	240020000008	NUTS:4.75*2.0MM<#-40>	2	PCS	INNER MOLDING	USB.B063KF	USB.A065KF	
8	240010700138	SRW:5.4*9.8MM <全牙>	2	PCS	OUTER MOLDING	USB.B064KF	USB.A066KF	
7	120020000001	PE-5321	4.5	G				
6	210030000057	HI TEAMP TAPE:W:6MM;	20*2	MM				
5	120010000031	PVC-BK10/50	6.8	G				
4	230020000001	SOL-WIRE-FULL-TIN-1.0	0.2	G				
3	110082304081	USB-B-S<WH>(橫殼鍍金)	1	SET				
2	110081004126	MINI-USB-B-P5PIN(BK) <一件式>(橫殼鍍金)	1	SET				
1	130304110000X	UL2725 28#*1P+24#*2C+AB,BK10, <OD:4.8<REV.2.0>	L	M				
NO.	PART NO.	DESCRIPTION	QTY	UNIT				

www.USBFireWire.com



ITEM: RR-2MBR02BFPM-XXGL

REV: D

DRAW, BY: 劉權

SCALE: NONE

DATE: 2009-10-08

CHECK, BY:

CUSTOMER: C331<程鴻>

APP, BY:

CUSTOMER P/N:

ALL DIMENSIONS IN mm