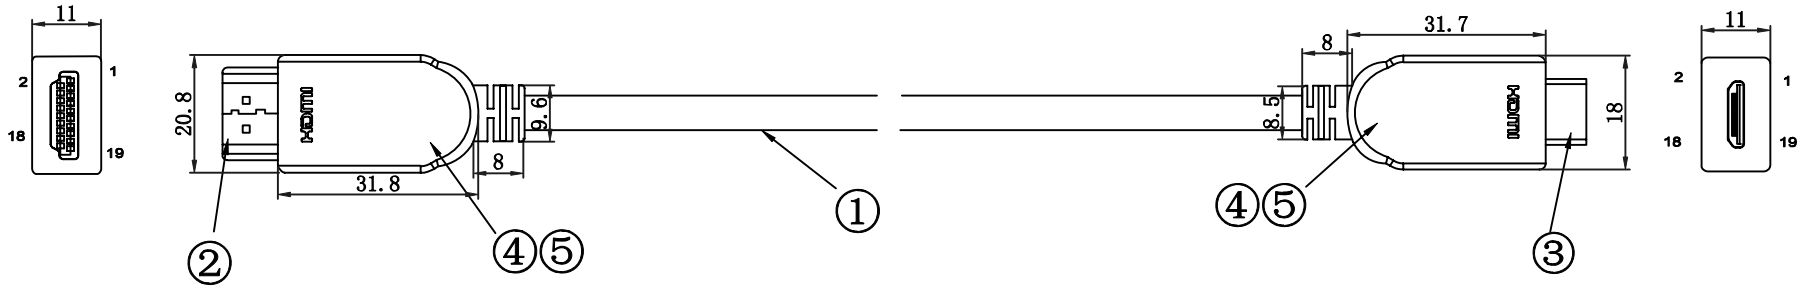

PIN ASSIGNMENT

HDMI 19M(A)		HDMI 19M(C)	
1		2	TMDS Data2+
3		3	TMDS Data2-
2		1	TMDS Data2 Shield
4		5	TMDS Data1+
6		6	TMDS Data1-
5		4	TMDS Data1 Shield
7		8	TMDS Data0+
9		9	TMDS Data0-
8		7	TMDS Data0 Shield
10		11	TMDS Clock+
12		12	TMDS Clock-
11		10	TMDS Clock Shield

PIN ASSIGNMENT

HDMI 19M(A)		HDMI 19M(C)	
13		14	CEC
15		15	SCL
16		16	SDA
18		18	+5V Power
14		17	Reserved
19		19	Hot Pulg detect
17		13	DDC/CEC Ground
Shell		Shell	

ROHS Compliant

NO	Description	Q'TY	Unit
4	65P Black PVC		
3	HDMI CM,BLACK INSULATION,SHELL 3U" GOLD PLATED WITH SOLDER(P/N YQT-HCM3)		
2	HDMI AM,BLACK INSULATION,SHELL 3U" GOLD PLATED WITH SOLDER(P/N YQT-HAM3)		
1	(1P*30AWG+D+AL)*5C+4C*30AWG+AL+D+B OD5.5		

Tolerance, Unless Otherwise Specified	
UP TO 5	±0.2
ABOVE 5 --30	±0.3
ABOVE 30--50	±0.4
ABOVE 50	±0.5
ANGLE	±3°

USBFIREWIRE.com

THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY INFORMATION OF RR BUSINESS VENTURES, LLC. THE POSSESSOR AGREES TO MAINTAIN THIS DOCUMENT IN CONFIDENCE; NOT REPRODUCE IT OR COPY IT, AND NOT TO REVEAL OR PUBLISH IT IN WHOLE OR PART.
COPYRIGHT © 2019

DRAW:		TITLE	HDMI AM TO CM		
CHEDKED:		PART NO.	RR-5S-3S-XXG		
APPROVED:		DRAW NO.			
DATE	2012-9-18	SCALE	1:1	UNIT	mm