

1

2




3

4


Note:

- 1. 供應商：麒祥，P/N：2PH3VD-510110G111A18.
- 2. 絕緣材質：Nylon 9T，UL 94V-0，黑色。
導體材質：銅合金 / Gold Flash.
- 3. 額定電流：1A.
- 4. 接觸阻抗：20 mΩ Max.
- 5. 絕緣阻抗：1000 MΩ Min.
- 6. 耐電壓：500V AC For One Minute.
- 7. 工作溫度：-40°C ~ +105°C.
- 8. 重點管制尺寸 **QC**.
- 9. 材質需符合RoHS要求.

REV	ECN#	DESCRIPTION OF REVISION	DRAW BY DATE	CHECK BY DATE	APPROVE BY DATE
A0			Lucas 01/18/24	Lucas 01/18/24	Ray 01/18/24

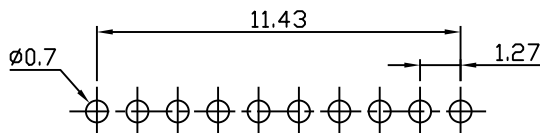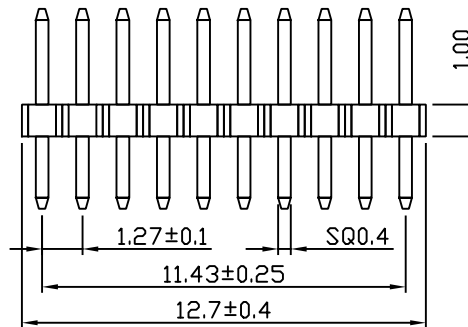

Recommended PCB Layout
(PCB Board Tolerance ±0.05)



TITLE Pin Header					DRAWING NUMBER RR-83006-M4002			REV. A0
	N/A	Lucas 01/18/24	Lucas 01/18/24	Ray 01/18/24	Linear .X ±0.40 .XX ±0.25 .XXX ±0.15	Angles .X ±5° .X ±3° .XX ±1°	mm	1/1
THIRD ANGLE PROJECTION	SCALE	DRAFTER / DATE	CHECK / DATE	APPROVE / DATE	TOLERANCES		UNIT	SHEET

THE INFORMATION CONTAINED HEREIN IS PROPRIETARY AND CONFIDENTIAL TO RR BUSINESS VENTURES, LLC. THE POSSESSOR AGREES TO THE FOLLOWING

1. MAINTAIN THIS DOCUMENT IN CONFIDENCE
2. NOT TO REPRODUCE OR COPY IT
3. NOT TO REVEAL OR PUBLISH IT IN WHOLE OR PART

1

2

3

4