



REV	DESC	DATE	ECN NO.
J		2011/04/12	N21104076
K		2011/04/15	N21104119
L		2011/11/29	自然切换

A母頭需與外模平齊

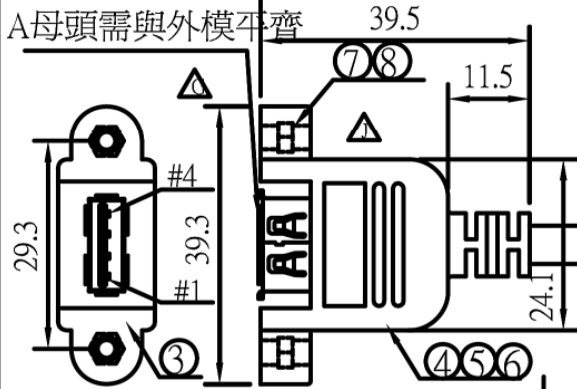

Plastic Tongue (Black Shaded Area)

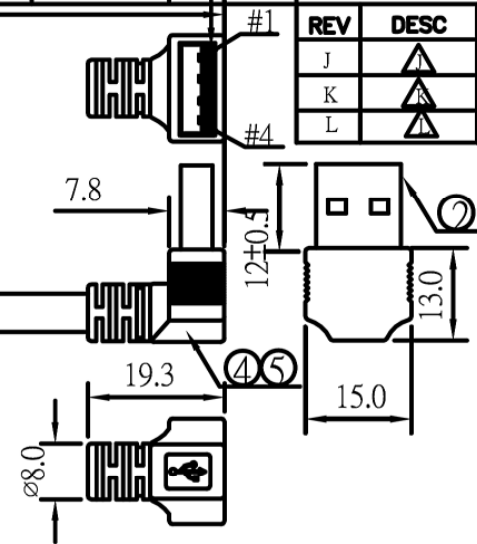

原舊15碼圖號為UB0101300X02669

CUSTOMER P/N	L±T	M	QTY
RR-AAR02TP-06G	152±10	0.152	A/R
RR-AAR02TP-12G	305±15	0.305	A/R
RR-AAR02TP-20G	508±20	0.51	1/300
RR-AAR02TP-24G	610±20	0.61	A/R

內埋螺母

RR-AAR02TP-XXG

LABEL貼PE BAG 中間



SCREW:


2PCS螺絲裝小
PE袋附成品袋中

RoHS COMPLIANT

NOTE:
1.同UB0101300X02668
只是P2端插頭方向不同

*	220030000363	TIE-A-BK10	80.0*1	MM
*	300030000434	PE-BAG:2.5"*2.5"*0.06MM(裝2PCS螺絲)	1	PCS
*	330010019390	LABEL:45*15MM"RR-AAR02TP-XXG"	1	PCS
*	310000000012	CARTON:46*30*25CM	A/R	PCS
*	300010000001	PE BAG:30"*28"*0.08MM	A/R	PCS
*	300030000193	PE BAG:5"*6"*0.06MM	1	PCS
8	240010700138	SRW:5.4*9.8 <全牙 4#-40UNC>	2	PCS
7	240020000008	NUTS:4.75*2.0MM<4-40UNC>	2	PCS
6	120020000001	PE-5321	5.0	G
5	120010000116	PVC-BK10/30	13.5	G
4	240010700138	SOL-WIRE-FULL-TIN-1.0	0.3	G
3	110082304028	USB-A-S<WH> <鐵殼鍍金>	1	PCS
2	110081304129	USB-A-P<WH> <一件式,短型,鐵殼鍍金>	1	SET
1	130304110181X	UL2725,(1P+2C)+AB,BK10,OD:5.0 (28/24)<REV:2.0>	L	M
NO	TYPE	DESCRIPTION	QTY	UNIT

PIN ASSIGNMENT

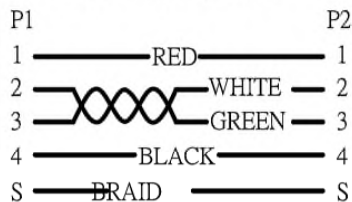

www.USBFireWire.com

ITEM: RR-AAR02TP-XXG

REV
N

楊燕瑛

SCALE: NONE

CUSTOMER: C331 (陸
潤)

ALL DIMENSIONS IN mm