


Note:

1.Type C -Pin out is the same as this drawing.

REV	ECN#	DESCRIPTION OF REVISION	DRAW BY DATE	CHECK BY DATE	APPROVE BY DATE
A7	ECN-210707	metal shell cover => Copper foil wrap	Lucas 07/16/21	Lucas 07/16/21	Ray 07/16/21

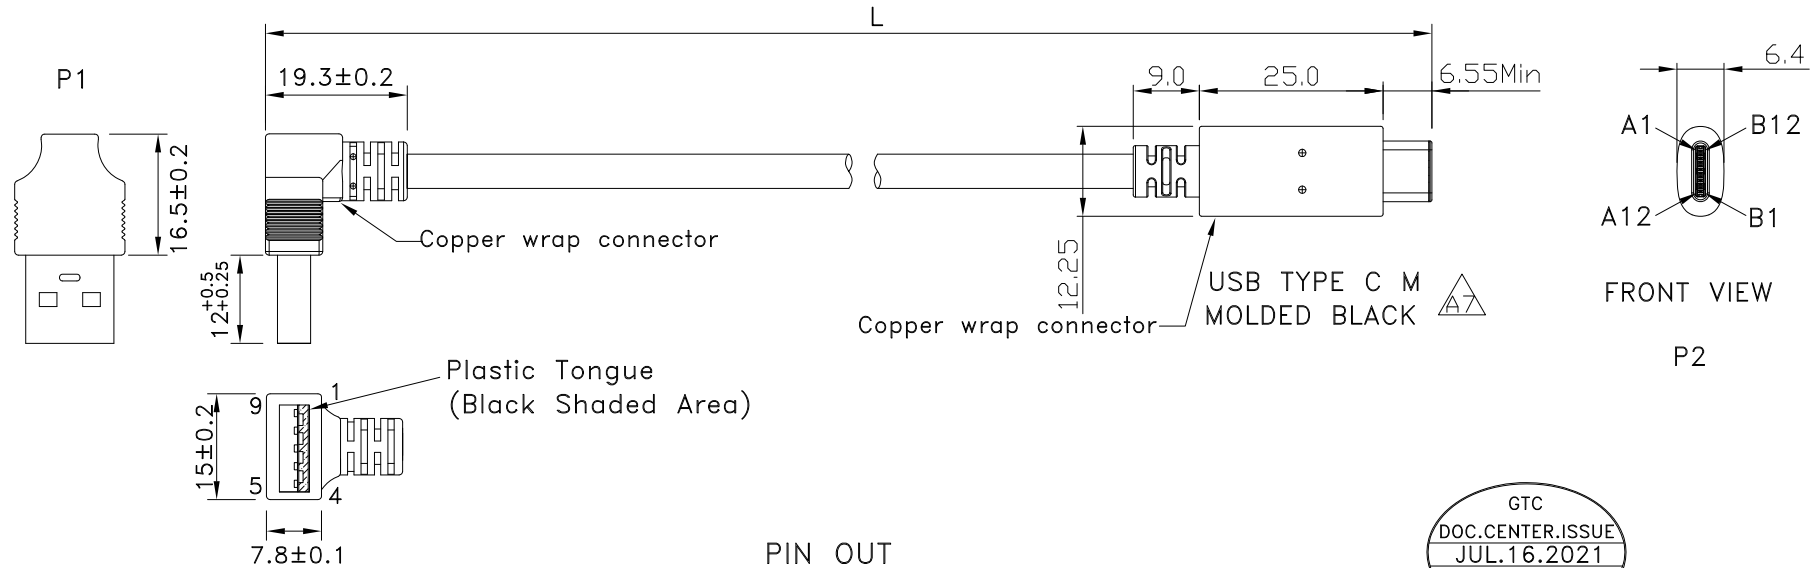


USB3.0 A MALE
RIGHT ANGLE DOWN
MOLDED BLACK

PIN OUT

P1		P2
1	RED	A4,B4,A9,B9
2	WHITE	A7
3	GREEN	A6
4	BLACK	A1,B1,A12,B12
5	BLUE(YELLOW MYLAR)	A3
6	YELLOW(YELLOW MYLAR)	A2
7	DRAIN	
8	BLUE(GREEN MYLAR)	B10
9	YELLOW(GREEN MYLAR)	B11
SHELL	DRAIN+BRAID	SHELL

GTC
DOC.CENTER.ISSUE
JUL.16.2021
ONLY FOR
RELEASE

RESISTOR & CAPACITOR



P/N	LENGTH
RR-ADCS-05GRC	127 ⁺²⁰ ₋₀
RR-ADCS-10GRC	255 ⁺²⁰ ₋₀
RR-ADCS-15GRC	381 ⁺³⁰ ₋₀
RR-ADCS-25GRC	635 ⁺³⁰ ₋₀
RR-ADCS-40GRC	1016 ⁺⁴⁰ ₋₀

TITLE						DRAWING NUMBER			REV.	
USB3.0 AM RIGHT ANGLE DOWN TO USB3.1 C TYPE MALE						RR-ADCS-XXGRC			A7	
DO NOT SCALE DRAWINGS	B	1:1	Lucas 11/27/15	Ray 11/27/15	Ray 11/27/15	X.X ± 0.5	X.XXX ± 0.05	mm	1/3	
THIRD ANGLE PROJECTION	SIZE	SCALE	DRAW / DATE	CHECK / DATE	APPROVE / DATE	TOLERANCES			UNIT	SHEET


USB FIREWIRE.com
NOTICE OF PROPRIETARY PROPERTY:
THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF GT Contact CO.,LTD THE POSSESSOR AGREES TO THE FOLLOWING:
(i) TO MAINTAIN THIS DOCUMENT IN CONFIDENCE
(ii) NOT TO REPRODUCE OR COPY IT
(iii) NOT TO REVEAL OR PUBLISH IT IN WHOLE OR PART
(iv) ALL RIGHTS RESERVED

1

2

3

4

REV	ECN#	DESCRIPTION OF REVISION	DRAW BY DATE	CHECK BY DATE	APPROVE BY DATE
A7	ECN-210707	metal shell cover => Copper foil wrap	Lucas 07/16/21	Lucas 07/16/21	Ray 07/16/21

***CONSTRUCTION:

1.CABLE: * UL2725 (1P/30#+EAM)*2+(1P/30#)+(2C/24#)+AEB(AL)65% OD:5.0mm
BLACK PVC JACKET.

***CONNECTOR:

2.USB A/M: * USB A "3.0" TYPE 9PIN MALE SOLDER TYPE. (SWEETRAY P/N:CHUSB3AM03B)
* PINS: 30u GOLD PLATED OVER NICKEL.
* INSULATOR: BLUE COLOR P.B.T UL 94V-0 RATED.
* SHELL: STEEL WITH GOLD FLASH .
* MOLDED: BLACK PVC 45P.

3.USB C/M: * USB TYPE C MALE SOLDER TYPE.
* PINS: 30u GOLD PLATED OVER NICKEL.
* INSULATOR: BLACK THERMOPLASTIC UL 94V-0.
* SHELL: STEEL WITH GOLD FLASH.
* RESISTOR(56KΩ) AND CAPACITOR.
* MOLDED: BLACK PVC 45P.

4.TEST: * CT: 2 ohm IS: 5M ohm DC300V 0.1S

5.PACKING: * PACK EACH CABLE IN A POLY BAG AND 25PCS IN A POLY BAG.

6.MATERIAL: * MATERIAL WITH RoHS GRADE.



TITLE						DRAWING NUMBER				REV.
USB3.0 AM RIGHT ANGLE DOWN TO USB3.1 C TYPE MALE						RR-ADCS-XXGRC				A7
	B	1:1	Lucas 11/27/15	Ray 11/27/15	Ray 11/27/15	X.X X.XX	± 0.5 ± 0.2	X.XXX ANGLES	± 0.05 ± 1°	mm 2/3
THIRD ANGLE PROJECTION	SIZE	SCALE	DRAW / DATE	CHECK / DATE	APPROVE / DATE	TOLERANCES			UNIT	SHEET

USBFIREWIRE.com
 NOTICE OF PROPRIETARY PROPERTY:
 THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF GT CONTACT CO., LTD. THE POSSESSOR AGREES TO THE FOLLOWING:
 (i) TO MAINTAIN THIS DOCUMENT IN CONFIDENCE
 (ii) NOT TO REPRODUCE OR COPY IT
 (iii) NOT TO REVEAL OR PUBLISH IT IN WHOLE OR PART
 (iv) ALL RIGHTS RESERVED

1

2

3

4


REV	ECN#	DESCRIPTION OF REVISION	DRAW BY DATE	CHECK BY DATE	APPROVE BY DATE
A7	ECN-210707	metal shell cover => Copper foil wrap	Lucas 07/16/21	Lucas 07/16/21	Ray 07/16/21

P/N	LENGTH(mm)	PE BAG(Inch)	PACKAGE
RR-ADCS-05GRC	127 ⁺²⁰ ₋₀	5.5"*10	(1)
RR-ADCS-10GRC	255 ⁺²⁰ ₋₀	5.5"*10	(2)
RR-ADCS-15GRC	381 ⁺³⁰ ₋₀	5.5"*10	(2)
RR-ADCS-25GRC	635 ⁺³⁰ ₋₀	5.5"*10	(2)
RR-ADCS-40GRC	1016 ⁺⁴⁰ ₋₀	5.5"*10	(2)

PE BAG LABEL




RoHS LABEL


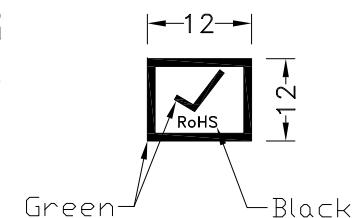


NOTES:PACK EACH CABLE IN A POLY BAG
AND 25PCS IN A POLY BAG.

PACK(1)



PACK(2)

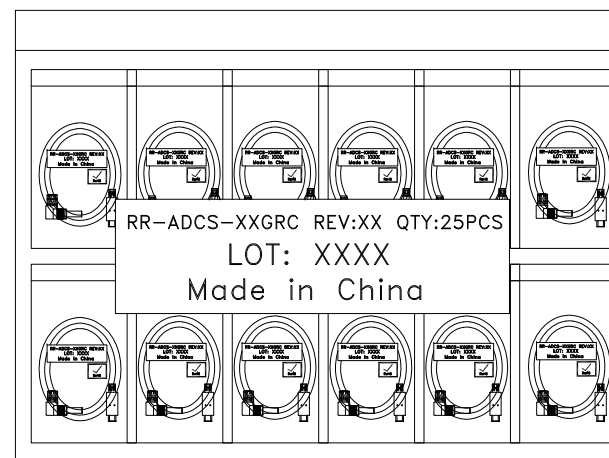

TITLE						DRAWING NUMBER			REV.
USB3.0 AM RIGHT ANGLE DOWN TO USB3.1 C TYPE MALE						RR-ADCS-XXGRC			A7
THIRD ANGLE PROJECTION	SIZE	SCALE	DRAW / DATE	CHECK / DATE	APPROVE / DATE	X.X X.XX	± 0.5 ± 0.2	X.XXX ANGLES ± 1°	mm 3/3
						TOLERANCES			SHEET



USB FIREWIRE.com

NOTICE OF PROPRIETARY PROPERTY:

THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF GT CONTACT CO.,LTD. THE POSSESSOR AGREES TO THE FOLLOWING:
 (i) TO MAINTAIN THIS DOCUMENT IN CONFIDENCE
 (ii) NOT TO REPRODUCE OR COPY IT
 (iii) NOT TO REVEAL OR PUBLISH IT IN WHOLE OR PART
 (iv) ALL RIGHTS RESERVED