





CHANGE VERSION	REMARKS	C	D	E
A	13/03/25	REL		
B				

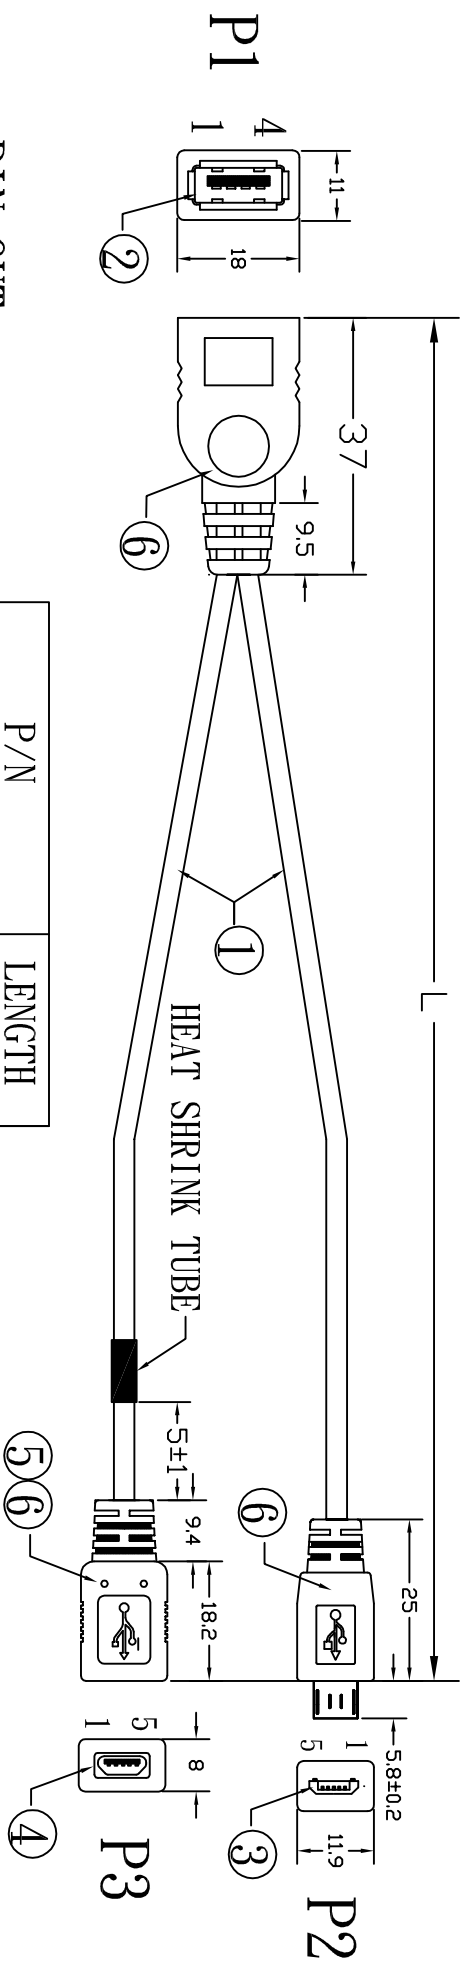

PIN OUT :

P2 P1 P3

P/N	LENGTH
RR-AFY-MXF-05G0	127±10

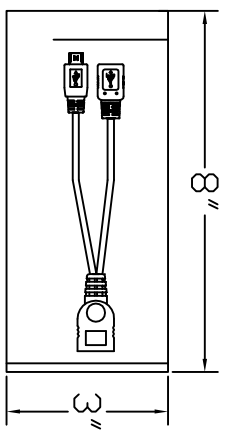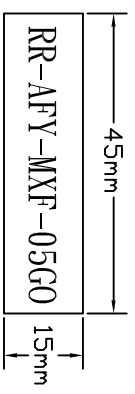

RD1 — 1 — 1
 WH 2 — 2
 GN 3 — 3
 BK 5 — 4 — 5
 BRAIDS — S

P/N STICKER

RED HEAT SHRINK TUBE
 OD: 4.0*L: 5mm

MATERIAL LIST :

NO.	P/NAME	DESCRIPTION	Q' TY
1	WIRE	UL2725 28AWG*1P+28AWG*2C+AL+1B(16*4/0.10 TC) OD:3.8±0.15 BLACK(B792) 2.0 VER.	1
2	PLUG	USB "A" TYPE FEMALE GOLD PLATED + TINPLATE	1
3	PLUG	MICRO USB"B"TYPE 5P MALE GOLD PLATED SHORT TYPE	1
4	PLUG	MICRO USB"B"TYPE 5P FEMALE GOLD PLATED	1
5	PVC	LD PE	1.5g
6	PVC	45P BLACK(B792)PVC	20g
7	PACKAGE	IPCE/PE BAG:06*3"*8" + P/N STICKER	1

MOLD TOOL NO.	USB AF A110-558-001	SCALE	UNIT	REV
	MICRO USB A110-591-001			
	MICRO USB F A110-592-001			
	B120-278-001			
www.USBFireWire.com		FILE NAME	CUSTOMER	
		DATE	CUSTOMER P/N	
		OW1303016		
		13/03/25		

ROHS

DRAWN BY
 Marcos

CHECKED BY

CONFIRMED BY

CHECKED BY

APPROVED BY