


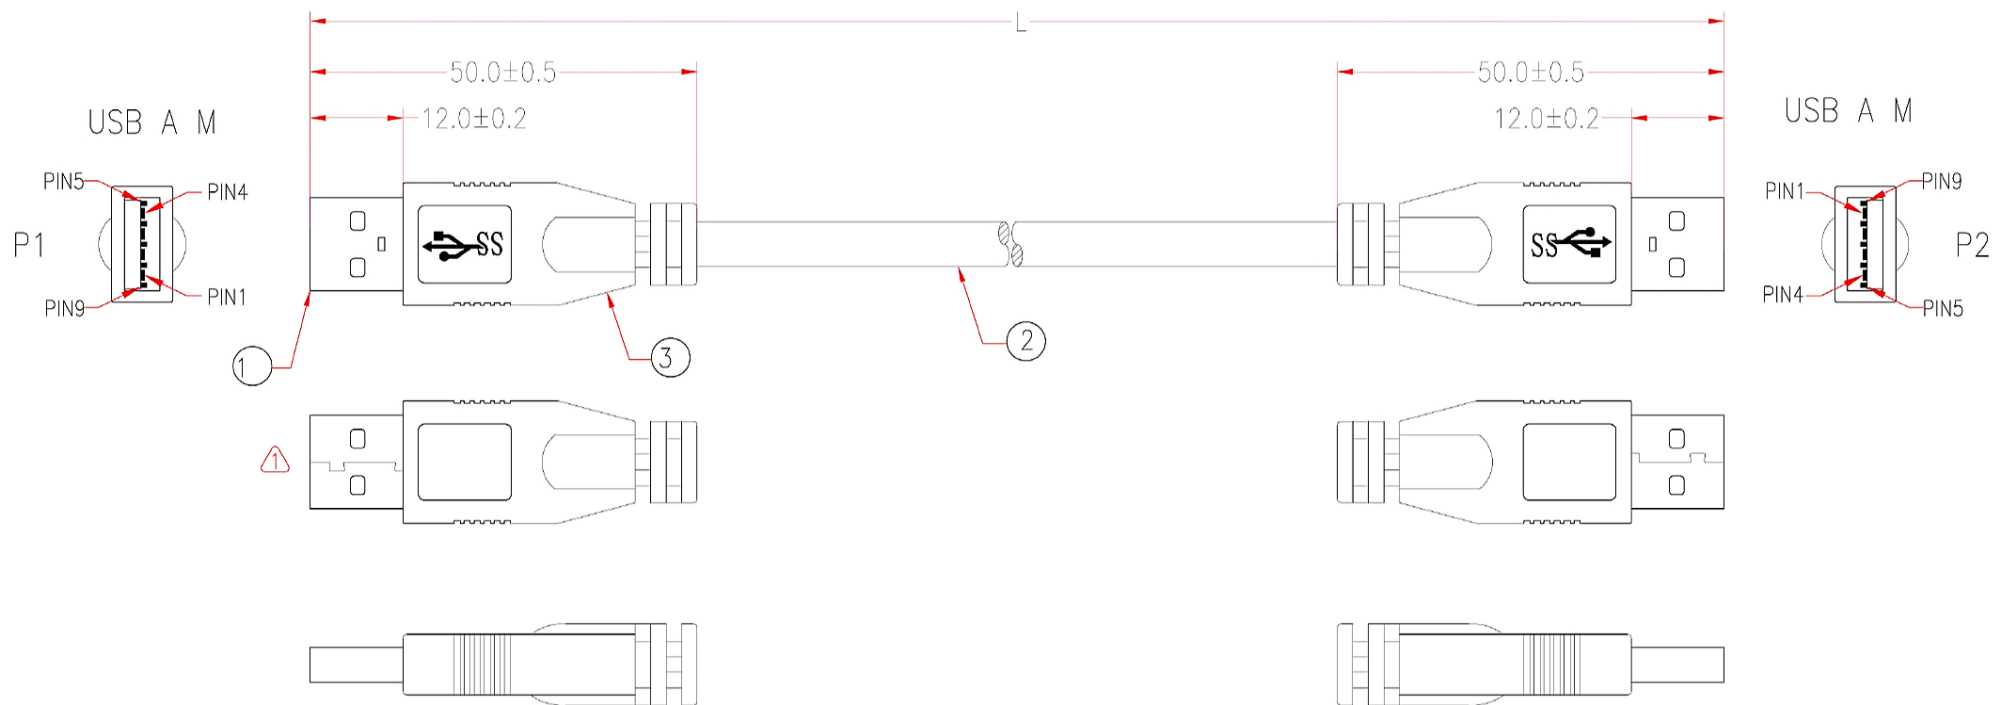

9142-1

P1	P2
1	1 RED
2	2 WHITE
3	3 GREEN
4	4 BLACK
5	8 BLUE
6	9 YELLOW
7	7 SHIELD
8	5 PURPLE
9	6 ORANGE
7	7 SHIELD
SHIELD	SHIELD

NOTE: All relevant materials are complied with RoHS directive .

3	BLACK HEAT SHRINK TUBE $\phi 1.0 \times 3\text{mm}$	2	M743
	BLACK HEAT SHRINK TUBE $\phi 3.0 \times 9\text{mm}$	4	M743
	MOLDED PVC BLACK		M304
2	USB 3.0 CABLE, 28AWG*1PAIR+(28AWG*1PAIR+D+F-AL)*2PCS+24AWG*2C+AMA BRAID, OD 5.8mm JACKET BLACK, DRAWING NO. EUAB2801P2802P2402C-333	L-20mm	M304
1	USB A MALE 3.0, GOLD PLATING 30u" ON CONTACTS BLUE INSULATOR, SHORT TYPE(CHUSB3AM01D)	2set	M108
No.	DESCRIPTION	Q'TY	Supplier
APPROVED			
CHECKED	HU		
DRAWING	MEI		
DATE	26/MAY/11	ITEM NO.	RR-AMX2-XXR

THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY INFORMATION OF RR BUSINESS VENTURES, LLC. THE POSSESSOR AGREES TO MAINTAIN THIS DOCUMENT IN CONFIDENCE; NOT REPRODUCE IT OR COPY IT, AND NOT TO REVEAL OR PUBLISH IT IN WHOLE OR PART.

USB FIREWIRE .com

COPYRIGHT © 2019

Cable Length Unless Other Spec.
Tolerances:
0 ~200mm $\pm 10\text{mm}$
201~1000mm $\pm 20\text{mm}$
1001 ~1500mm $\pm 25\text{mm}$
1501~2100mm $\pm 30\text{mm}$
2100mm $\pm 40\text{mm}$