


CHANGE VERSION	REMARKS	C
A	15/10/16	REL
B		

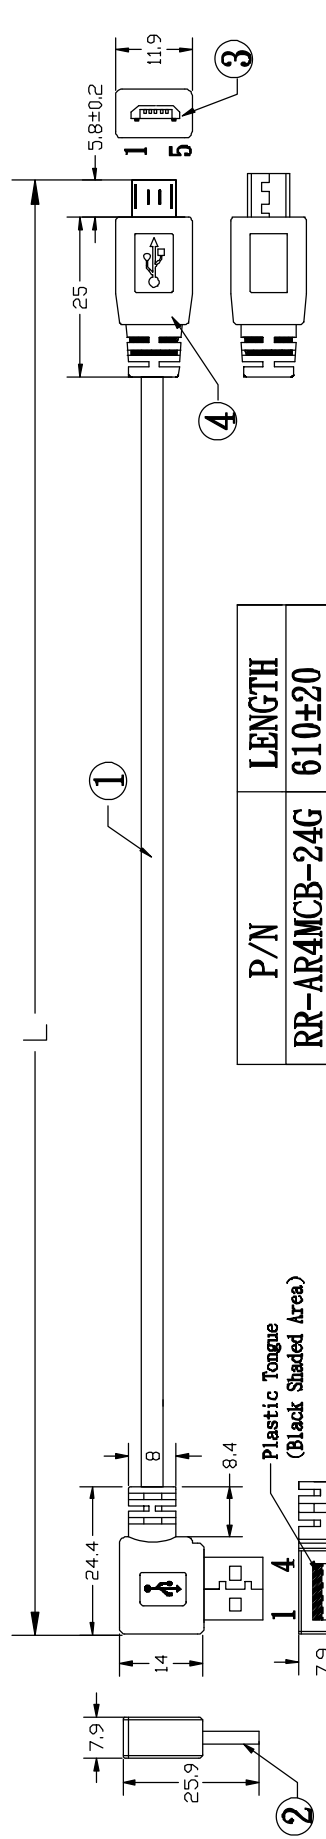

P/N	LENGTH
RR-AR4MCB-24G	610±20

4.5mm	RR-AR4MCB-24G	15mm
-------	---------------	------

P/N STICKER

- PIN OUT :**
- | | |
|--------|-----------|
| USB AM | MICRO USB |
| 1 | 1 RD |
| 2 | 2 WH |
| 3 | 3 GN |
| 4 | 5 BK |
| S | S BRAID |

MATERIAL LIST :

NO.	P/NAME	DESCRIPTION	Q' TY
1	WIRE	UL2725 28AWG(7/0.12 TC)*1P+24WG(7/0.20 TC)*2C+AL+1(TC)+ B(16*4/0.10 TC) OD:5.0±0.15 BLACK(B792) 2.0 (COPARTNER)	1
2	PLUG	USB"A" TYPE MALE GOLD PLATED SHORT TYPE	1
3	PLUG	MICRO USB"B"TYPE 5P MALE GOLD PLATED SHORT TYPE	1
4	PVC	45P BLACK(B792)/PVC	12g
5	PACKAGE	IPCE/PE BAG:06*4" *6" + P/N STICKER	1

ROHS

MOLD TOOL NO.	SCALE	UNIT	REV
"A" TYPE A110-557-001 MICRO USB A110-591-001		MM	A
FILE NAME	CUSTOMER	CHECKED BY	APPROVED BY
OW1510016		Marcos	
DATE	CUSTOMER P/N	CONFIRMED BY	
15/10/16			

www.USBFireWire.com