


1

2

3

4

REV	ECN#	DESCRIPTION OF REVISION	DRAW BY DATE	CHECK BY DATE	APPROVE BY DATE
A0		Mass Production	Lucas 05/05/14	Ray 05/05/14	Ray 05/05/14

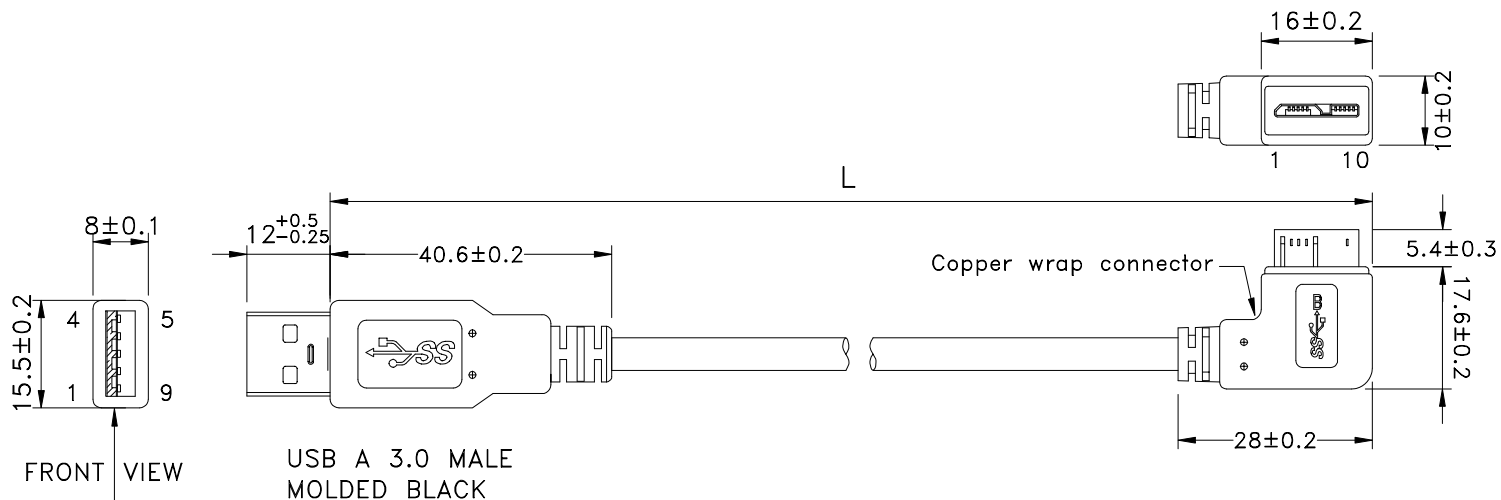

FRONT VIEW

Plastic Tongue
(Black Shaded Area)

USB A 3.0 MALE
MOLDED BLACK

Copper wrap connector

Micro USB BM
RIGHT ANGLE LEFT
MOLDED BLACK

PIN OUT

USB A M		Micro-USB BM
1	RED	1
2	WHITE	2
3	GREEN	3
4	BLACK	5
5	BLUE	6
6	YELLOW	7
7	DRAIN	8
8	PURPLE	9
9	ORANGE	10
SHEEL	BRAID	SHEEL

DOC.CENTER.ISSUE
NOV.26.2015
ONLY FOR
RELEASE

P/N	LENGTH
RR-ASML-06GR	153 ⁺²⁰ ₋₀
RR-ASML-10GR	255 ⁺³⁰ ₋₀
RR-ASML-20GR	508 ⁺³⁰ ₋₀
RR-ASML-32GR	813 ⁺⁴⁰ ₋₀
RR-ASML-78GR	1980 ⁺⁶⁰ ₋₀
RR-ASML-180GR	4575 ⁺⁸⁰ ₋₀

TITLE USB3.0 AM To Micro-BM RIGHT ANGLE LEFT				DRAWING NUMBER RR-ASML-XXGR				REV. A0	
---	--	--	--	--------------------------------	--	--	--	------------	--

	B	1:1	Lucas 05/05/14	Ray 05/05/14	Ray 05/05/14	X.X ± 0.5 X.XX ± 0.2	X.XXX ± 0.05 X.XXX ± 1°	mm	1/4
THIRD ANGLE PROJECTION	SIZE	SCALE	DRAW / DATE	CHECK / DATE	APPROVE / DATE	TOLERANCES		UNIT	SHEET

THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY INFORMATION OF RR BUSINESS VENTURES, LLC. THE POSSESSOR AGREES TO THE FOLLOWING

1. MAINTAIN THIS DOCUMENT IN CONFIDENCE
2. NOT TO REPRODUCE OR COPY IT
3. NOT TO REVEAL OR PUBLISH IT IN WHOLE OR IN PART

COPYRIGHT © 2019

1

2

3

4

1

2

3

4

REV	ECN#	DESCRIPTION OF REVISION	DRAW BY DATE	CHECK BY DATE	APPROVE BY DATE
A0		Mass Production	Lucas 05/05/14	Ray 05/05/14	Ray 05/05/14

***CONSTRUCTION:

1.CABLE: * UL2725 (1PR/28#+EAM)*2+(1PR/28#+A)+2C/24#+AB85%
 OD:5.5mm BLACK JACKET (REV:3.0)

***CONNECTOR:


2.USB A/M: * USB A "3.0" TYPE 9PIN MALE SOLDER TYPE.(NEW-CONN P/N:06801508M5CA)
 * PINS: 30u GOLD PLATED OVER NICKEL.
 * SHELL: STEEL WITH GOLD FLASH .
 * INSULATOR: BLUE COLOR P.B.T UL 94V-0 RATED.
 * MOLDED BLACK PVC 45P.

3.Micro-USB B/M: * MICRO-USB B "3.0" TYPE 10PIN MALE SOLDER TYPE.(SWEETRAY P/N:CHMICROUSB3BM01E)
 * PINS: 30u GOLD PLATED OVER NICKEL.
 * SHELL: STEEL WITH GOLD FLASH .
 * INSULATOR: BLACK COLOR P.B.T UL 94V-0 RATED.
 * MOLDED BLACK PVC 45P.

4.TEST: * CT: 2 ohm IS: 5M ohm.

5.PACKING: * PACK EACH CABLE IN A POLY BAG AND 25PCS IN A POLY BAG.

6.MATERIAL: * MATERIAL WITH RoHS GRADE.



TITLE USB3.0 AM To Micro-BM RIGHT ANGLE LEFT					DRAWING NUMBER RR-ASML-XXGR			REV. A0	
	B	1:1	Lucas 05/05/14	Ray 05/05/14	Ray 05/05/14	X.X ± 0.5 X.XX ± 0.2	X.XXX ± 0.05 ANGLES ± 1°	mm	2/4
THIRD ANGLE PROJECTION	SIZE	SCALE	DRAW / DATE	CHECK / DATE	APPROVE / DATE	TOLERANCES		UNIT	SHEET

THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY INFORMATION OF RR BUSINESS VENTURES, LLC. THE POSSESSOR AGREES TO THE FOLLOWING

1. MAINTAIN THIS DOCUMENT IN CONFIDENCE
2. NOT TO REPRODUCE OR COPY IT
3. NOT TO REVEAL OR PUBLISH IT IN WHOLE OR IN PART

COPYRIGHT © 2019

1

2

3

4