



P1,P2: M-Y4050A
M-4050A

Customer No: N0.1

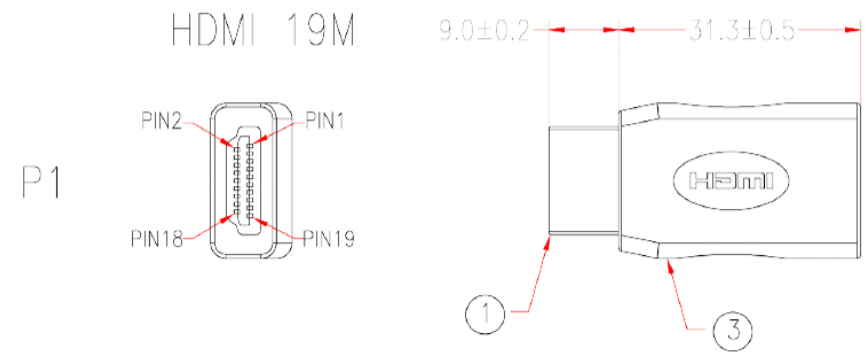

4565

P1	P2
1	2
3	3
2	1
4	5
6	6
5	4
7	8
9	9
8	7
10	11
12	12
11	10
13	14
17	13
18	18
15	15
16	16
14	17
19	19
SHIELD	SHIELD

NOTE: All relevant materials are complied with RoHS directive .

3	UL1061 28AWG INSULATOR WIRE, LENGTH 20mm, ID0.9, DRAWING No.EH002801C-024	1	M304
	MOLDED PE COLOR TRANSPARENT		M280
	MOLDED PVC BLACK		M304
	COPPER FOIL 20*40mm	1	M309
	PCB: MSL-72	1	M730
2	HDMI C 19 FEMALE, GOLD PLATING 15u" ON CONTACTS & GOLD CONNECTOR, BLACK INSULATOR(R-S160U-0),PCB TYPE	1	M24
1	HDMI 19 MALE, GOLD PLATING 15u' ON CONTACTS & GOLD CONNECTOR, BLACK INSULATOR, PCB TYPE	1	M83
No.	DESCRIPTION	Q'TY	Supplier
APPROVED		USBFIREWIRE.com THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY INFORMATION OF RR BUSINESS VENTURES, LLC. THE POSSESSOR AGREES TO MAINTAIN THIS DOCUMENT IN CONFIDENCE; NOT REPRODUCE IT OR COPY IT, AND NOT TO REVEAL OR PUBLISH IT IN WHOLE OR PART. COPYRIGHT © 2019 Cable Length Unless Other Spec. Tolerances: 0 ~200mm ±10mm 201~1000mm ±20mm 1001 ~1500mm ±25mm 1501~2100mm ±30mm 2100mm↑ ±40mm	
CHECKED	HU		
DRAWING	JIANG		
DATE	10/AUG/11		
ITEM NO.	RR-HDMI-CFAM	UNIT:mm	